
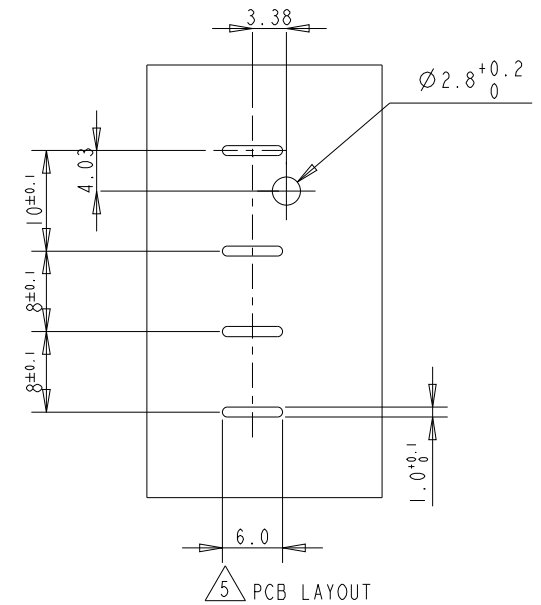
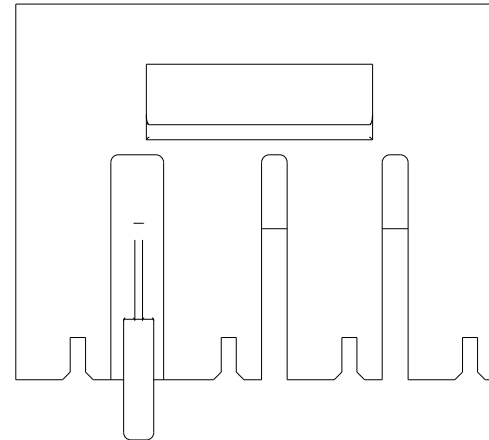
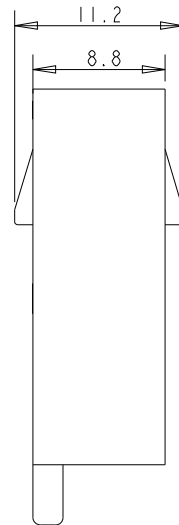
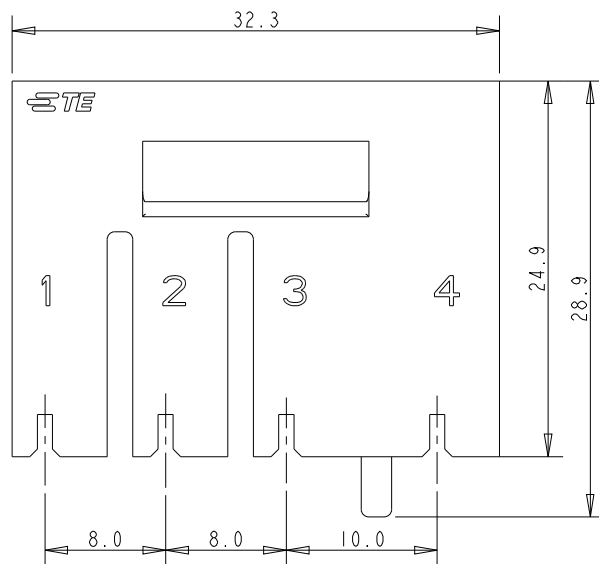


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	09NOV21	DT	EW

NOTE:
1. APPLICABLE CONTACT PN: 2379911-1
2. MATERIAL: PBT UL94 V-0
3. GWT 750 VERSION, ACCORDING TO IEC 60335-1
4. THE TAB MUST BE PERPENDICULAR TO THE PCB
WITHIN THE TOLERANCE $90^{\circ} \pm 2^{\circ}$

5 PCB LAYOUT WHEN USING TAPING TAB: 2358709-1

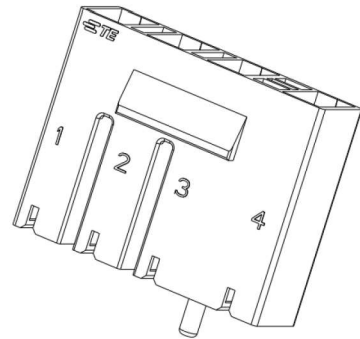

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DON TANG 07DEC2020	 TE Connectivity		
		CHK DAISY LI 07DEC2020			
		APVD ERIC WANG 07DEC2020	NAME 250 HSG. F-SPRING REC. 10mm/8mm 4P		
DIMENSIONS: mm		PRODUCT SPEC 108-106568			
		APPLICATION SPEC -			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT -			
0 PLC ±0.25		CUSTOMER DRAWING			
1 PLC ±0.2		SCALE 1:1			
2 PLC ±		SHEET 1 OF 1			
3 PLC ±		REV A			
4 PLC ±					
ANGLES ±					
MATERIAL -					
FINISH -					