
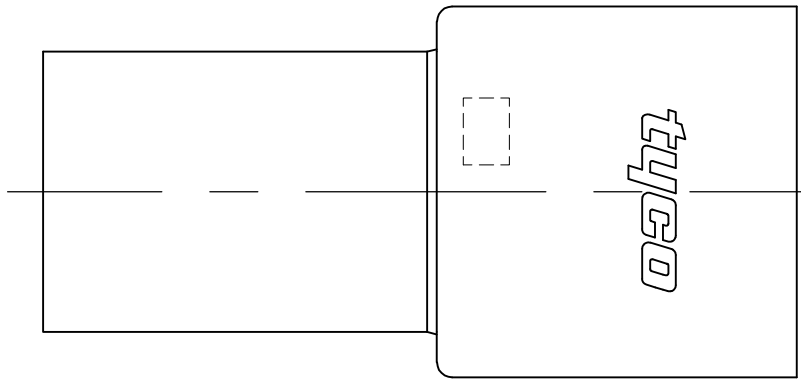
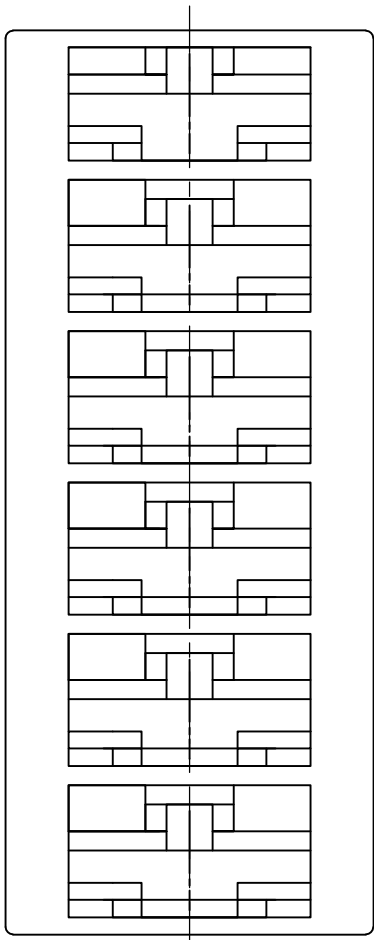
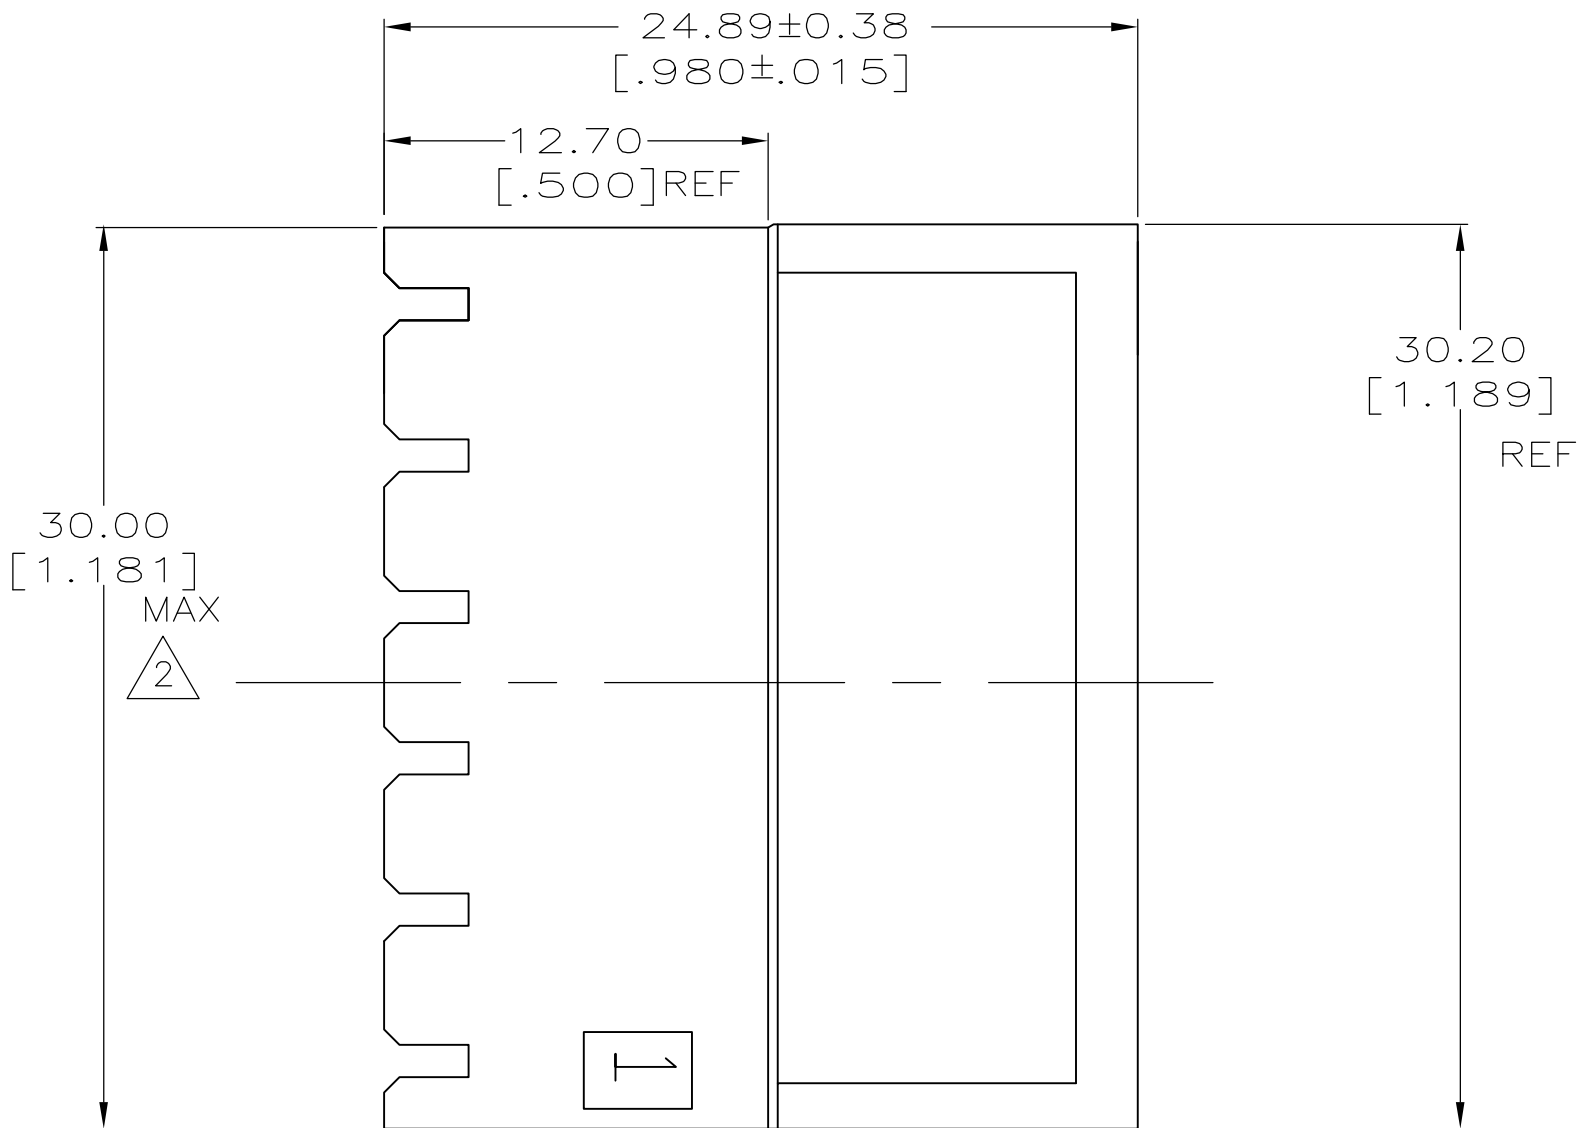


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	DWN
			B	REVISED PER ECR-16-001902	21MAR2016	JP

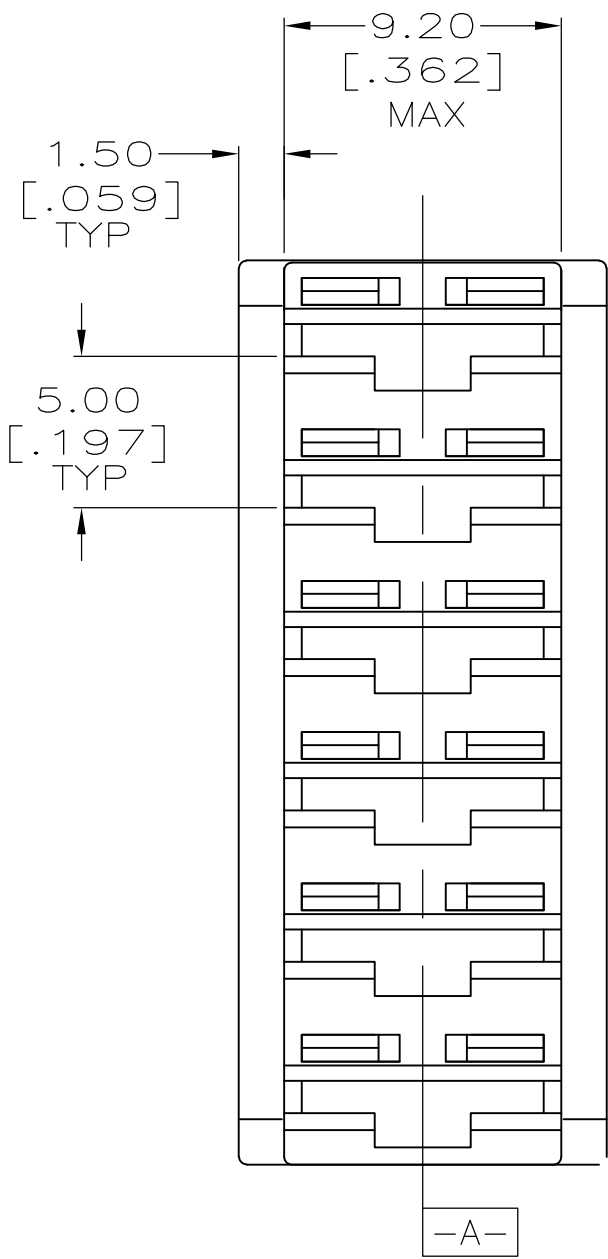

- 1
- ACCEPTS RECEPTACLE CONTACTS AND WIRE RANGES:
- | PART NUMBER | WIRE RANGE |
|-------------|---|
| 1217378 | 22 - 18 AWG |
| 1217094 | 18 - 14 AWG OR A COMBINATION OF (TWO #18'S) |
| 1217095 | 16 - 12 AWG OR A COMBINATION OF (TWO #18'S OR TWO #16'S OR AN #18 AND #16). |

2

HOUSING WIDTH MEASURED ACROSS CIRCUITS AT CENTERLINE DATUM [-A-].

BLUE	NONE	NONE	521794-1
COLOR	KEYING FEATURE	POLARIZATION FEATURE	PART NUMBER
DWN R FLAIG 28FEB2005 CHK R LONDON 28FEB2005 APVD R LONDON 28FEB2005 PRODUCT SPEC APPLICATION SPEC WEIGHT			
NAME HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35 [.250] SERIES, 6 POSITION			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=521794	-
CUSTOMER DRAWING			SCALE 4:1 SHEET 1 of 1 REV B

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH
MATERIAL	SEE TABLE
NYLON	