

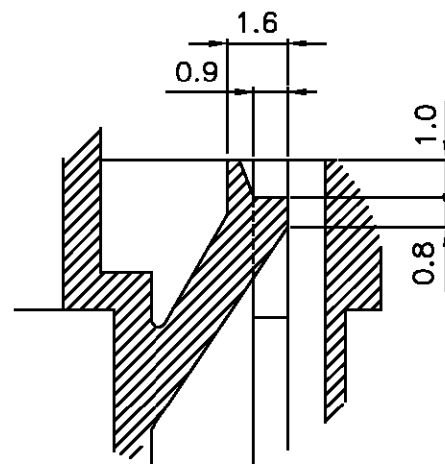
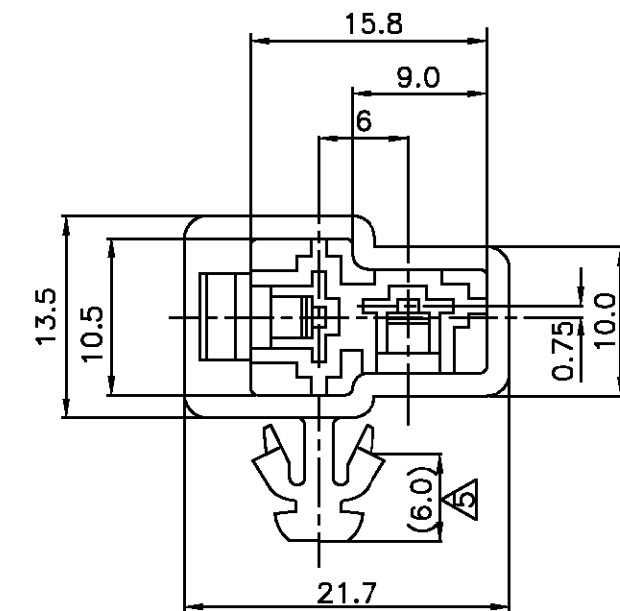
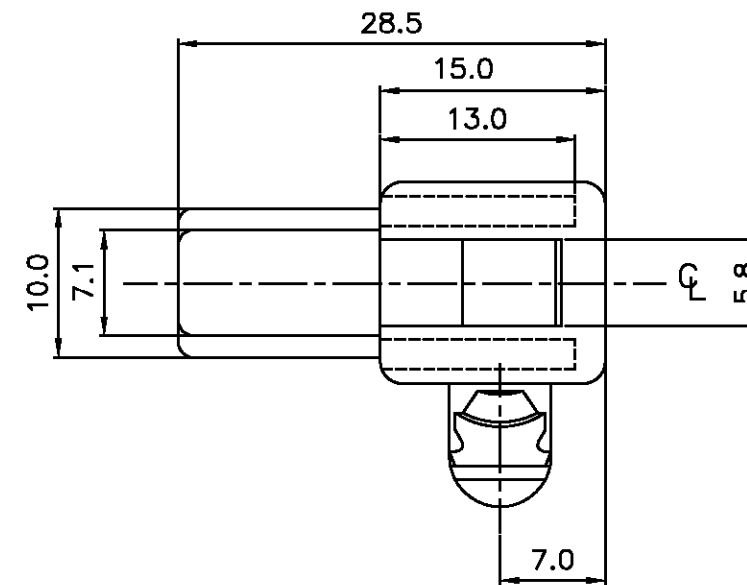


CUSTOMER DRAWING

TRADE MARK IN THIS AREA
CHARACTERS RAISED 0.02~0.1

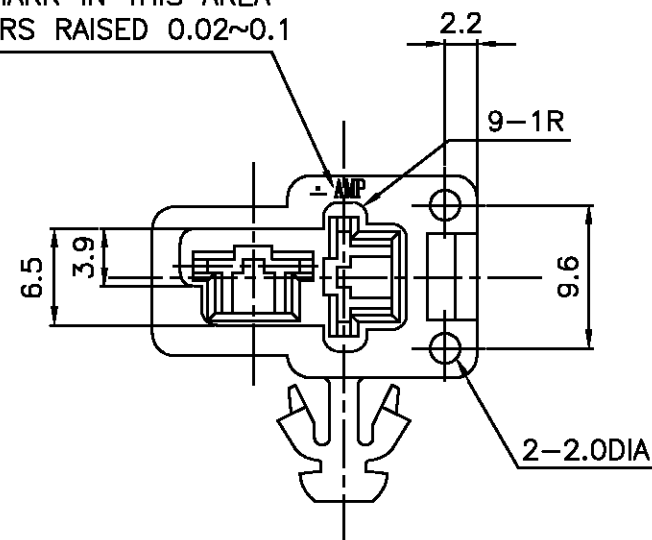

DETAIL LANCE
SCALE:5/1

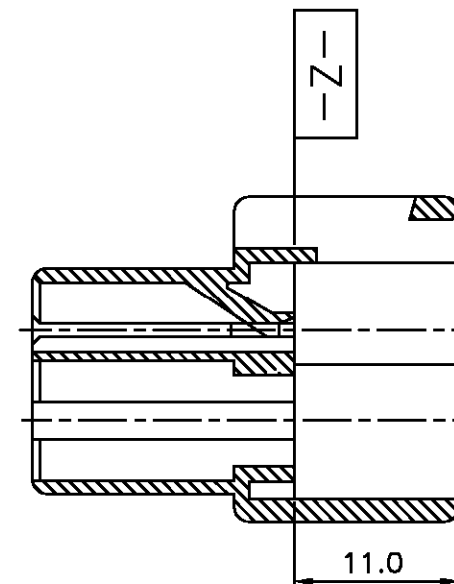

NOTE

1. TO BE MEASURED BETWEEN $\boxed{-Z-}$ AND 2mm.
2. TO BE MATE WITH REC HSG SMOOTHLY.
3. TO BE MATE WITH PLATE(176994) SMOOTHLY
- ④ 4. APPLICABLE PANEL : DIAMETER - $\phi 7.0$ mm
THICKNESS - 0.65~1.2 mm
- ④ 5. A SPACE REQUIRED INSIDE OF THE PANEL
FOR PROPER INSTALLATION.
6. APPLIED CONTACT P/N : 170340,170341,170349
7. APPLIED REC HSG P/N : 172130

NATURAL	368021-1
COLOR	PART NO.

APPLICABLE TAB CONTACT			
WIRE RANGE		TML P/N	CURRENT (A)
AWG	mm ²		
20-14	0.5-2.27	170340	10
14-12	2-3.37	170341	20
22-20	0.3-0.5	170349	5

					© 19 AMP KOREA ALL RIGHT RESERVED AMP PRODUCTS COVERED BY PATENTS AND OR PATENTS PENDING			AMP AMP KOREA							
					WIRE RANGE INSULATION DIA		NAME 250 2P CAP CLIP HSG. (PANEL MOUNT TYPE)								
					MATERIAL NYLON 66		FINISH/COLOR SEE TABLE		TOLERANCES 0<XX<10 ±0.2 10<XX<30 ±0.25 30<XX<100±0.3 ANGLES ±3°		SIZE A3	LOC DS	NUMBER 368021		
A	REVISED(RD97-0157)		YJ	JK	JUL 29 97	DR		APP		SCALE 2/1		REV A		SHEET 1/1	
O	RELEASED		YM	JK	11/10 95	CHK		REL							
LTR REVISION RECORD			DR	CHK	DATE										