


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	DWN
		D		REVISED PER ECR-16-001902	22MAR2016	JP

- 1ACCEPTS RECEPTACLE CONTACTS 1217378(#18-#22 AWG SINGLE WIRE), 1217094(#18-#14 AWG SINGLE WIRE) AND 1217095 (TWO #18'S OR TWO #16'S OR A #16 + #18 COMBINATION).
- 2FRONT AND BACK VIEWS SHOW ONLY THE GRIPPERS. FOR KEYING AND POLARIZATION FEATURES, SEE SPECIAL FRONT VIEW.
- 3TAB SHOULDER SLOTS OPTIONAL ON BOTH SIDES OF DUMMY CIRCUITS.

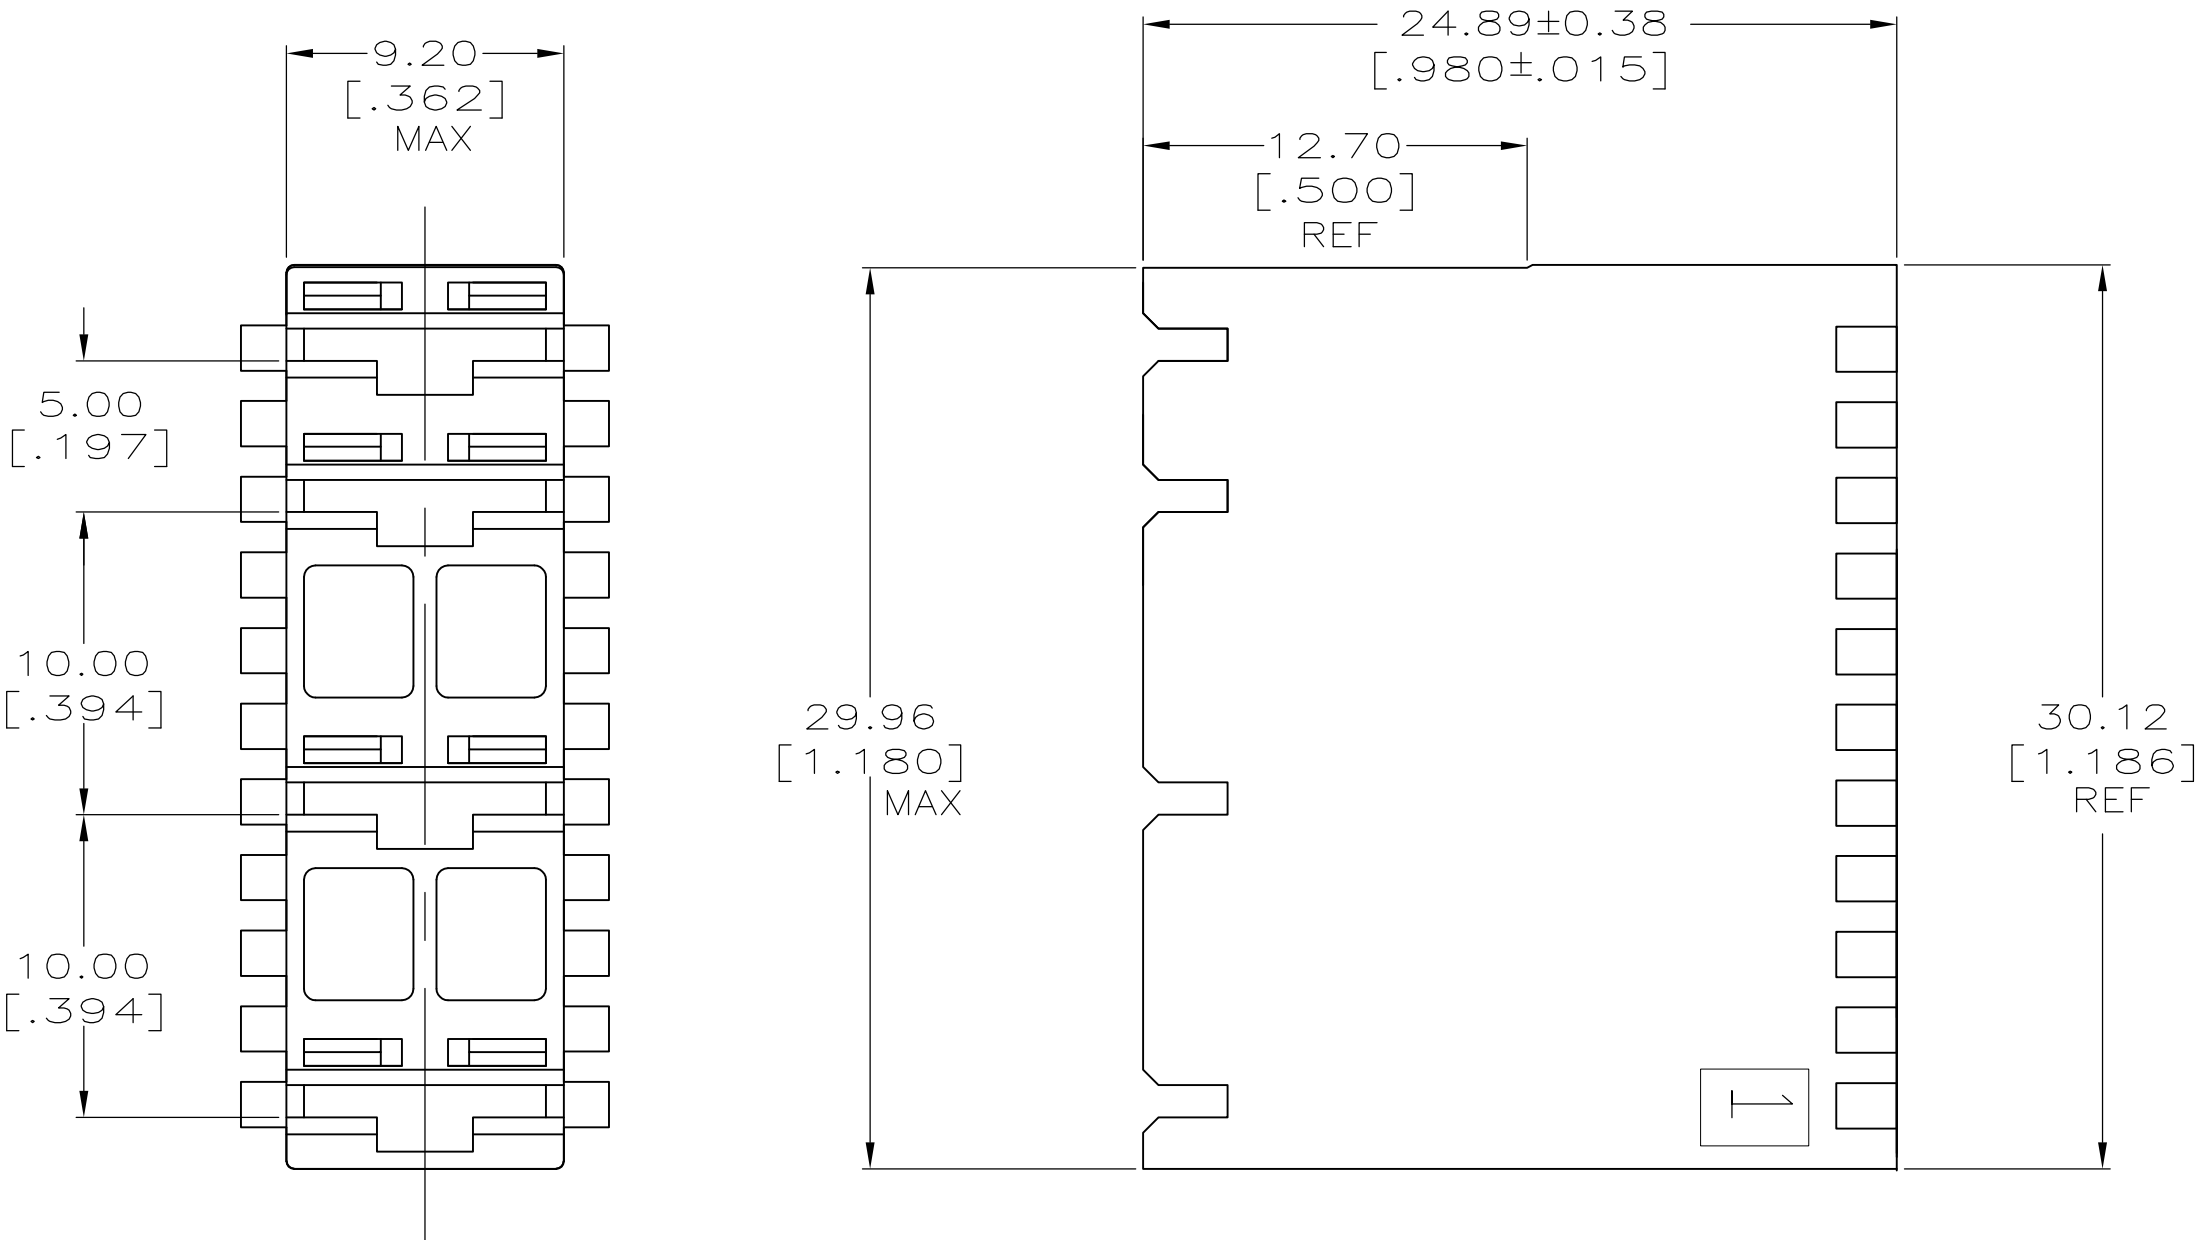

		BLUE	NONE	NONE	521435-1	
		FINISH/COLOR	KEYING FEATURE	POLARIZATION FEATURES	PART NO.	
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN JR RUTH 18OCT01	TE TE Connectivity		
			CHK N DEIBERT 18OCT01			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD N DEIBERT 18OCT01	NAME	
		0 PLC ± -		PRODUCT SPEC	HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35 [.250] SERIES, 6 POSITION/4CIRCUIT -	
		1 PLC ± -		—		
		2 PLC ± 0.25 [.010]		APPLICATION SPEC		
3 PLC ± -		—		—	SIZE	
4 PLC ± -		—		—	CAGE CODE	
ANGLES ± -		—		—	DRAWING NO	
MATERIAL		FINISH		WEIGHT	RESTRICTED TO	
NYLON		SEE TABLE			A2 00779 C-521435	
CUSTOMER DRAWING				SCALE 4:1		SHEET 1 of 1
				REV D		