



PART NUMBER	TAB SIZE	WIRE RANGE AWG	DIMENSIONS in.		
			A .015	B .010	C .010
D18-250B	.250 X .032 (6.4 X 0.8)	22-18	.63 (16.0)	.30 (7.6)	.12 (3.0)
D14-250B	.250 X .032 (6.4 X 0.8)	16-14	.63 (16.0)	.30 (7.6)	.12 (3.0)



1. USED FOR:
A. STRANDED COPPER WIRE ONLY
B. 302°F (150°C) MAX TEMP RATING
2. PACKAGE QTY:
A. STD: C=100
B. BULK: M=1000
3. MATERIAL:
A. STAMPING: .016 (0.41) THK BRASS, TIN PLATED
4. WIRE STRIP LENGTH 9/32 ^{+1/32} (7.1 ^{+0.8})
₋₀ ₋₀
5. FIRST INSERTION FORCE: 12 LB (53N) MAX
FIRST WITHDRAWAL FORCE: 12 LB (53N) MAX
6 LB (27N) MIN
6. INSTALLATION TOOLS:
A. CT-100 (POCKET B)
7. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm

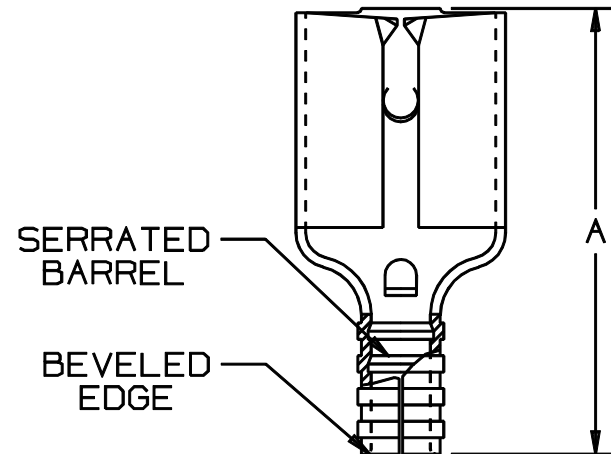

A41209_06

								 PANDUIT CORP. TINLEY PARK, ILLINOIS			
06	1/01	KMD		CAD FILE SPEC. WAS N41209AA_PCD_05				NON-INSULATED FEMALE DISCONNECT (BUTTED SEAM)			
05	6-95	MS		UPDATED NOTES AND DIMENSIONS	03372						
04	8-88	DW	MC	REDRAWN WITH REVISIONS			JRB				
REV	DATE	BY	CHK	DESCRIPTION	ECN#	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								DAW		NONE	A41209