

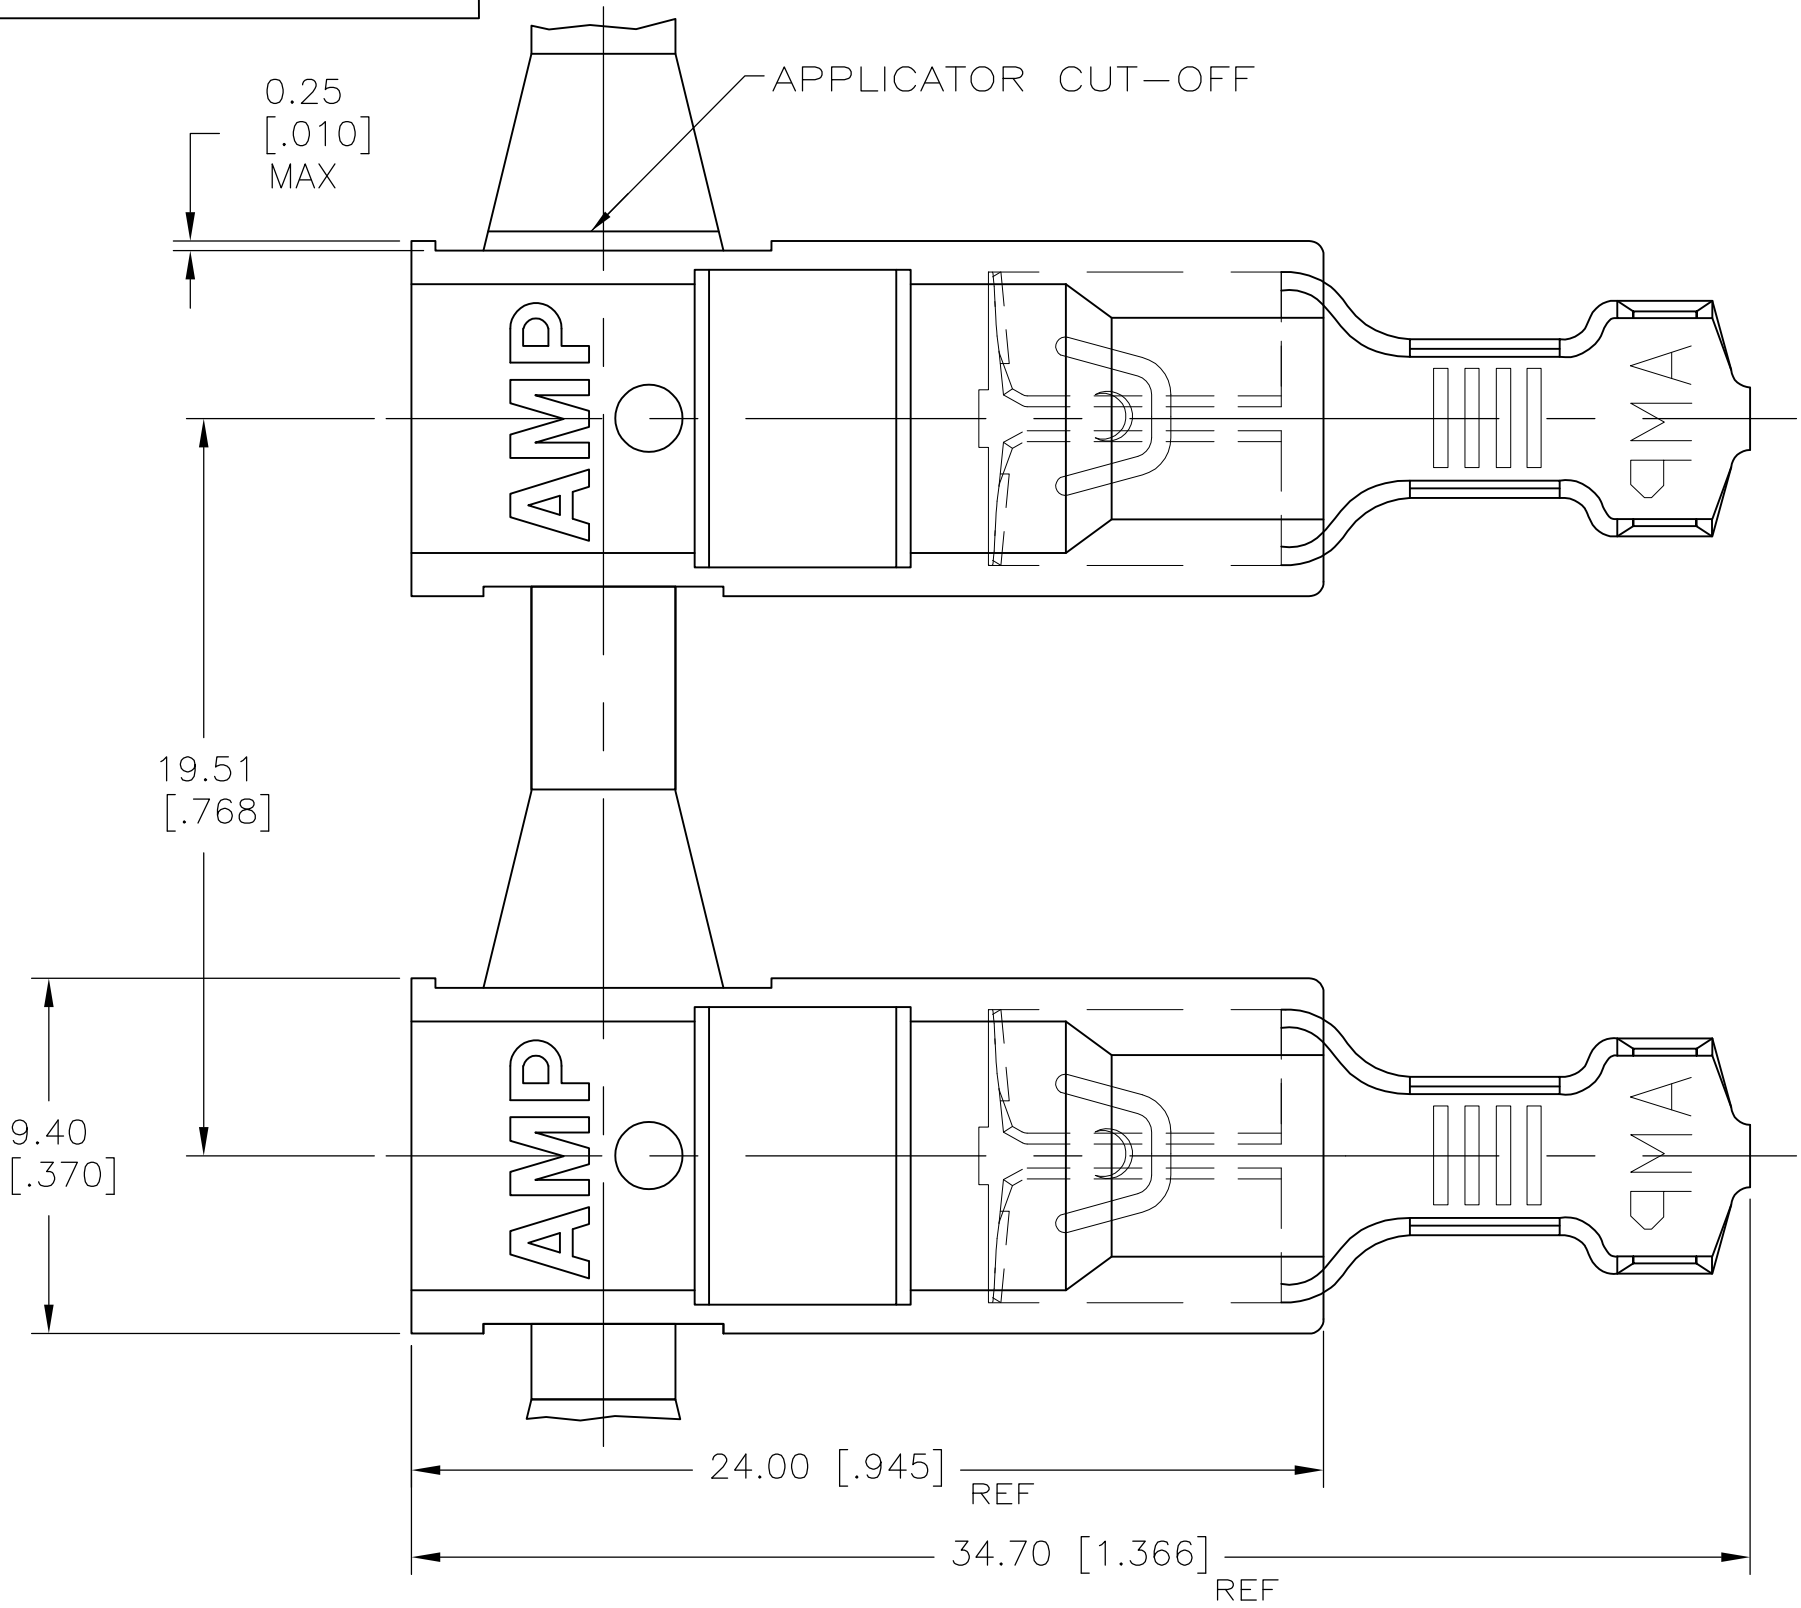
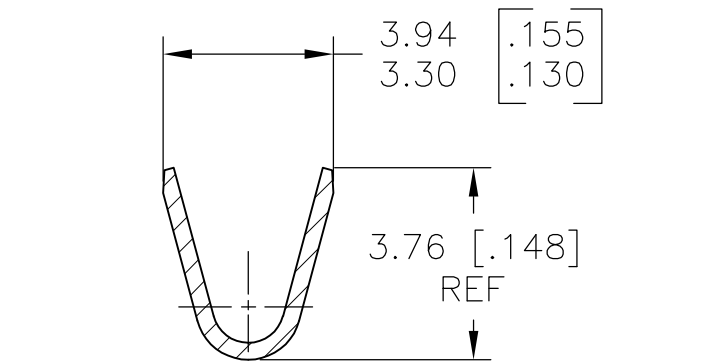


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	DWN
			A1	RELEASED PER ECO 13-019833	18DEC13	APVD

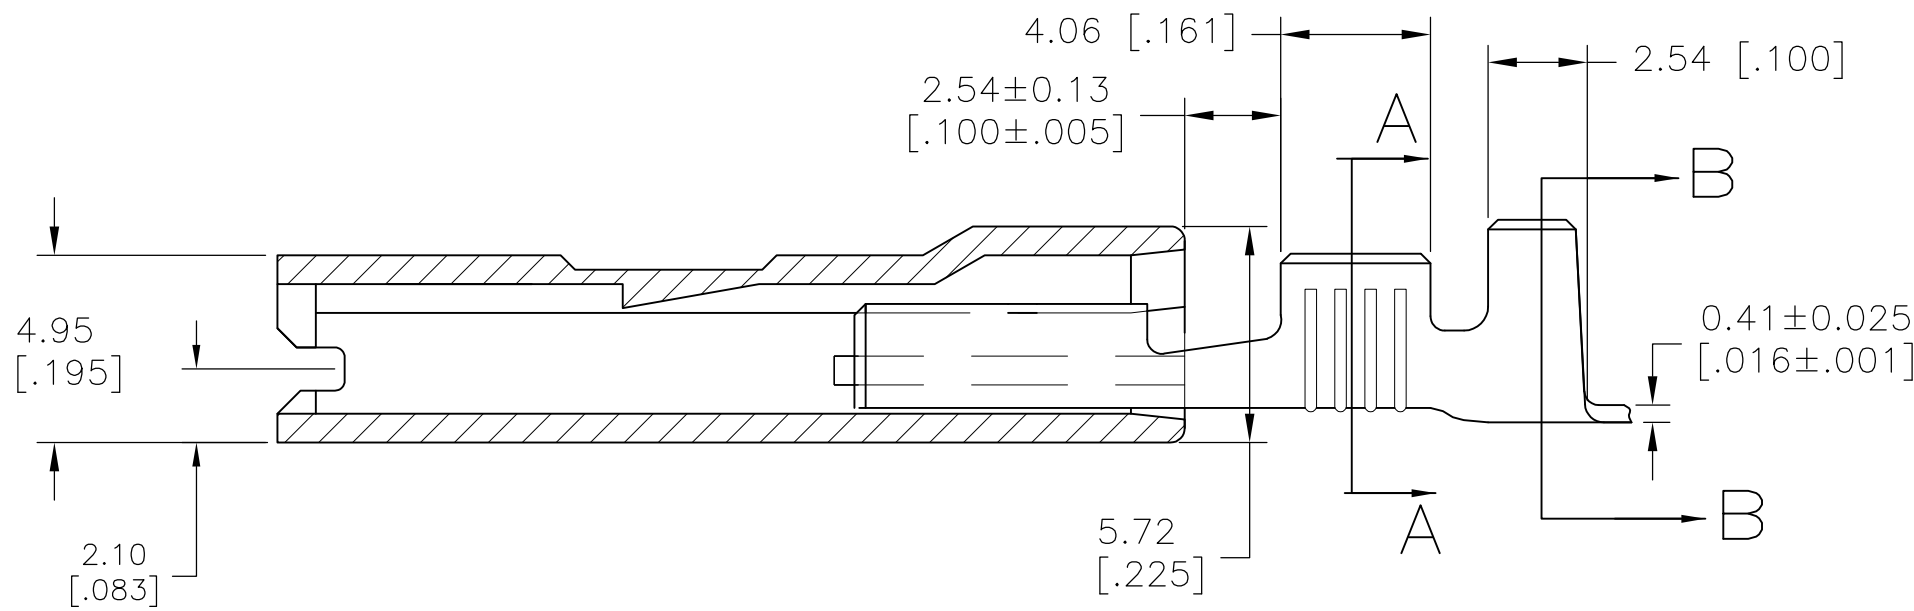


SECTION A-A

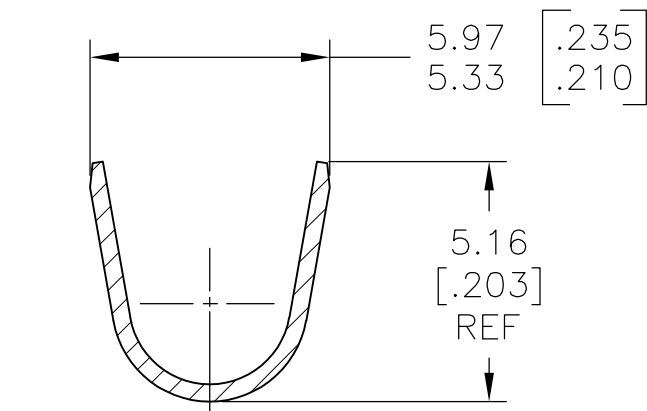

SECTION B-B

- 1
- LOW-INSERTION FASTON TERMINAL,
BASE P/N 1742198-2, IS USED IN THIS PRODUCT.
- 2
- MATING TAB THK IS 0.813±0.025 [.032±.001].
- 3
- WIRE SIZE IS 0.8-2.0mm² [18-14] AWG.
- 4
- INSULATION RANGE IS 3.05-4.32 [.120-.170] DIA.

STANDARD		VO NYLON 66, 150°C NATURAL (WHITE)		H02 STEEL / 0.00381 [.000150] MIN NICKEL		1969447-1	
PACKAGING		HOUSING		TERMINAL		PART NO	
		MATERIAL / FINISH					
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN JR RUTH 19JUL11		<div>TE Connectivity</div>	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK RAY LANDON 19JUL11			
		APVD RAY LANDON 19JUL11		NAME			
		0 PLC ± -		PRODUCT SPEC		ASSEMBLY, ULTRA-POD, RECEPTACLE, 6.35 [.250] SERIES -	
		1 PLC ± -		-			
		2 PLC ± -		APPLICATION SPEC			
		3 PLC ± 0.25 [.010]		-			
		4 PLC ± -				SIZE	
		ANGLES ± -				CAGE CODE	
MATERIAL		FINISH		WEIGHT		DRAWING NO	
SEE TABLE		SEE TABLE		-		A2 00779 C=1969447	
CUSTOMER DRAWING				SCALE		RESTRICTED TO	
				5:1		-	
				SHEET		REV	
				1 of 1		A1	