




Terminals & Splices > Quick Disconnects

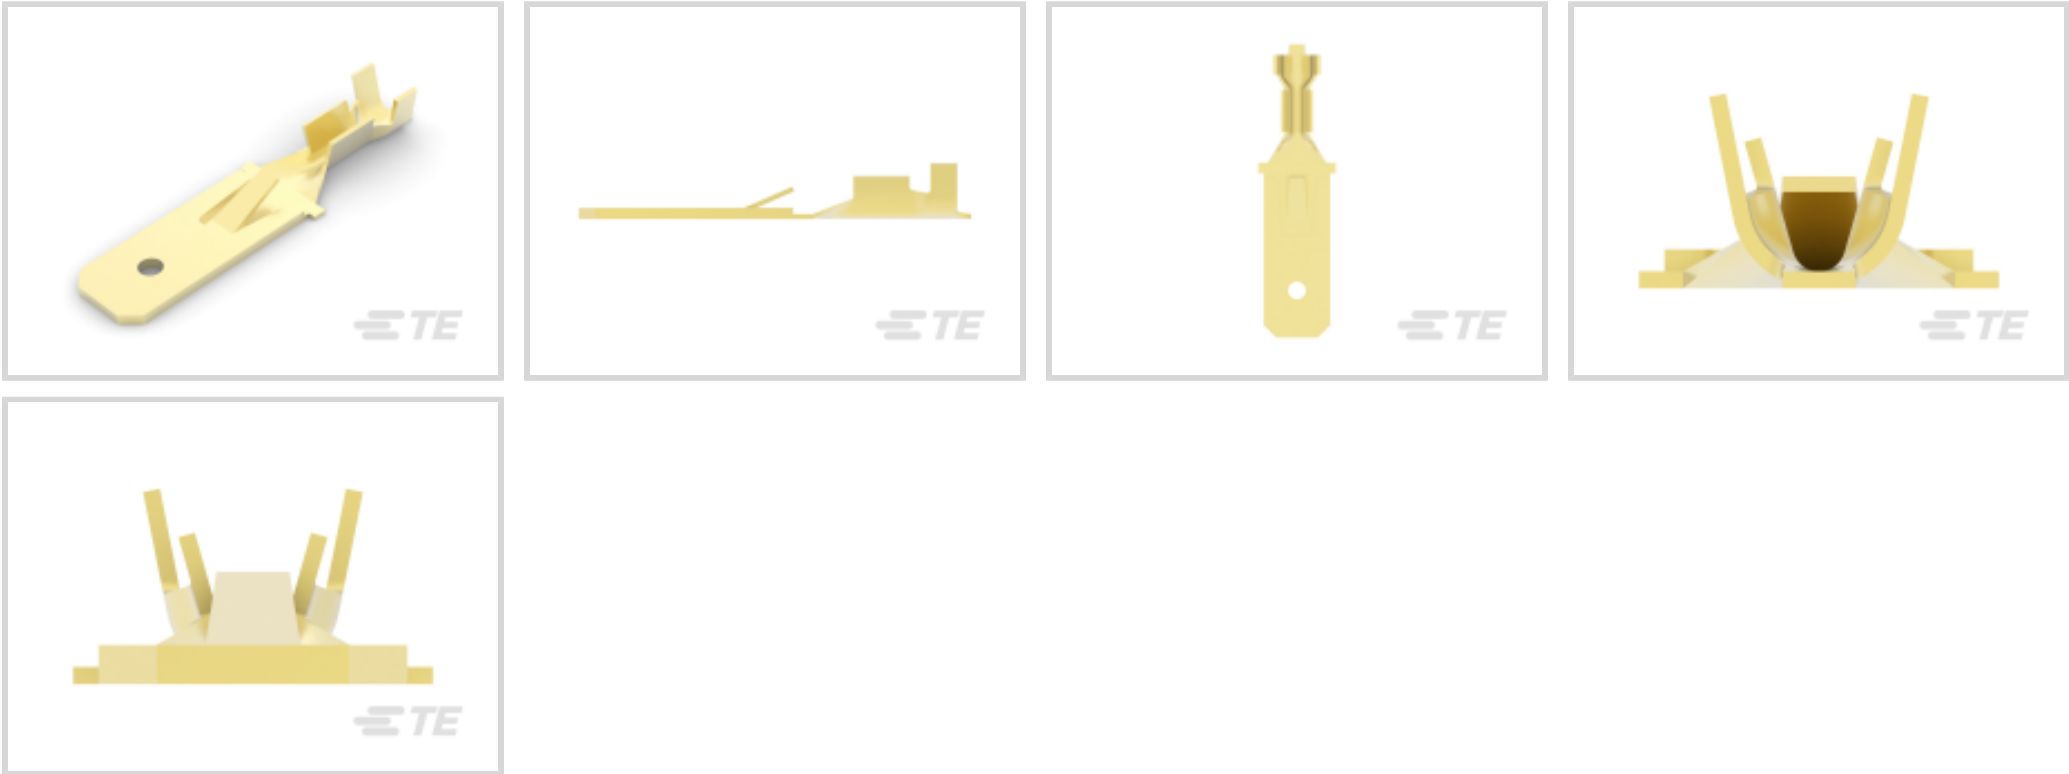

Quick Disconnect Terminal Type: **Tab**

Wire Size: **.32 – 1.04 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Electrical Characteristics

Voltage Rating	250 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.5 mm[.06 in]
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Terminal Material Thickness	.36 mm[.014 in]
Product Length	27 mm[1.063 in]
Compatible Insulation Diameter Range	2.31 mm[.091 in]
Wire Size	.32 – 1.04 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	3000
Packaging Method	Strip/Reel

Other

Terminals & Splices Comment	With hole
-----------------------------	-----------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

Also in the Series | FASTIN-FASTON 250


Customers Also Bought




TE Part #794896-1
2 CIR MINI UMNL RND WIRE HOLES




TE Part #641974-1
12P UMNL PIN HDR ASSY 94VO

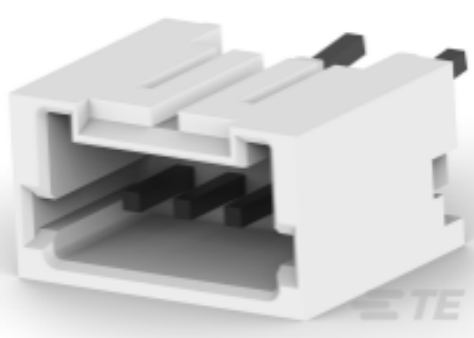

TE Part #2-292207-4
MINI CT SGL DIP V 4P BLACK

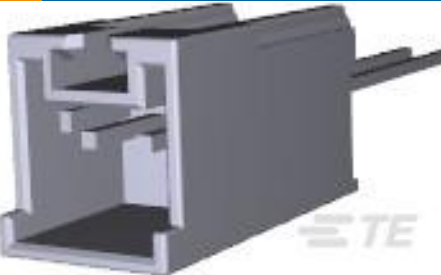

TE Part #917722-1
2.5 SIGNAL D/LOCK HDR ASSY 2P

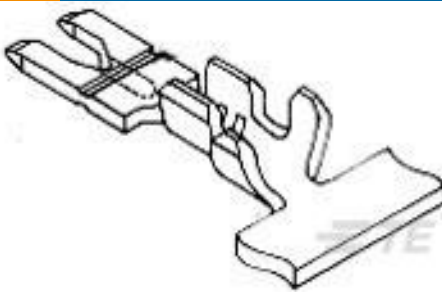

TE Part #964290-1
POKE-IN FLA-STECKER



TE Part #1394759-1
MAG MATE CONT.MKII



TE Part #964338-1
MAG MATE LEAF KONT



TE Part #9-829327-4
ID POKE IN TAB CONN.3P



TE Part #173724-7
PL 187 REC 20-18 AWG 0.30 X 38.6
PTBR

Documents

Product Drawings

FF 250 TAB 0.35-1.0MM2 BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_293041-1_C_c-293041-1-c.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_293041-1_C_c-293041-1-c.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_293041-1_C_c-293041-1-c.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



FASTIN-FASTON* Connectors, 6.3 mm series TAB CONTACT.

Application Specification

Product Environmental Compliance

TE Material Declaration

English