

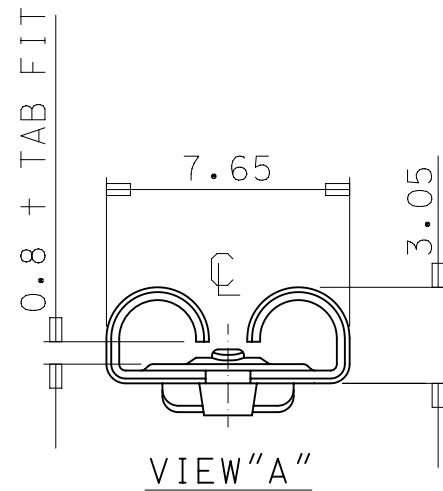
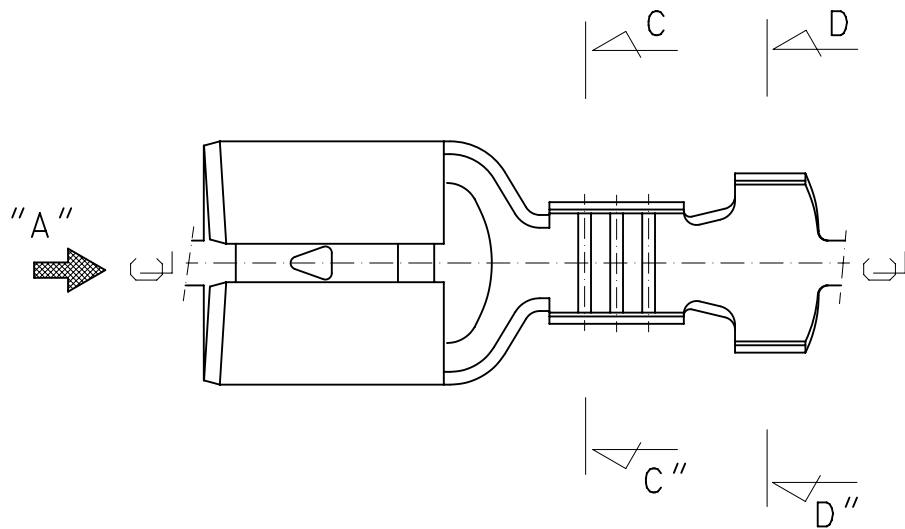



SECTION:C-C



SECTION:D-D

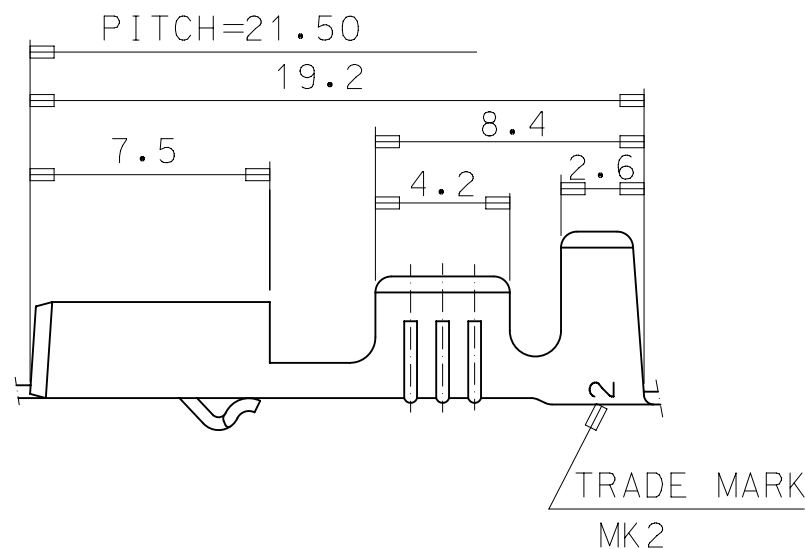

ENG.NO.	a	b	d	e	WIRE RANGE	INS.DIA.	Q'TY/REEL
35725-4510	2.7	3.0	4.6	4.4	AWG #22-#18	1.5-3.0	5,000

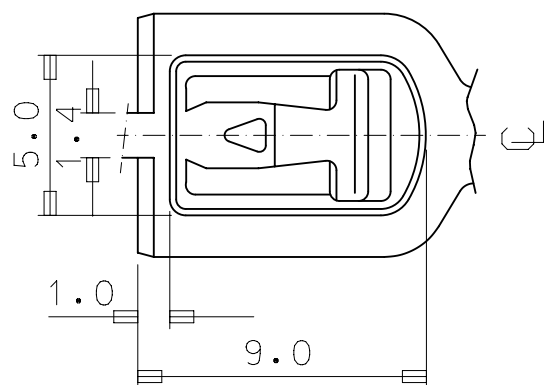

NOTES

1. MATERIAL: BRASS 0.40 THICKNESS
2. FINISH: PRE-TIN PLATING
3. MATING TAB THICKNESS: 0.8
4. RECOMMENDED LENGTH OF WIRE STRIP IS 5.5-6.0

ASS'Y PART		QTY/ REEL OR PACK ---	SURFACE AREA --- MM ²	WIRE RANGE AWG: ---
DESCRIPTION	ENG.NO.			
---	---	DIE NO. ---	LAYOUT NO. ---	MM ² : ---
		WIRE CRIMP WIDTH ---	INS. CRIMP WIDTH ---	INSULATION RANGE ---
DIE FEED 21.5	APPL FEED 21.5	WBDW ---	IBDW ---	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NO				molex	
mm		4:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 625872 DRWN: AKUMAR19 2019/06/13 CHK'D: GB 2019/11/06 APPR: GGA 2019/11/12 INITIAL REVISION: DRWN: W.Y.YANG 1994/05/19 APPR:				.250 SAFE LOCK RECEPTACLE	
4 PLACES	± 0.3	±							
3 PLACES	± 0.3	±							
2 PLACES	± 0.3	±							
1 PLACE	± 0.3	±							
0 PLACES	± 0.3	±						PRODUCT CUSTOMER DRAWING	
ANGULAR TOL ± 0.5°								DOCUMENT NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION				SD-35725-4X10	
				DRAWING				PSD	
				SERIES				001	
				MATERIAL NUMBER				C	
				CUSTOMER				1 OF 1	
				SEE TABLE					

DOCUMENT STATUS	P1	RELEASE DATE	2019/11/12 07:18:02
-----------------	----	--------------	---------------------