


10			9		8		7					6	
F	MOLEX-ETC PART NO.	INS. COLOR	WIRE RANGE AWG	FITS MALE TAB SIZE	STOCK THICK.	"A" MAX.	"B" MIN.	"C" MAX.	"D" MAX.	"E" MAX.	CARRIER CONFIGURATION	INSULATION MATERIAL	
	M-2212	YELLOW	26-24	.250x.032	.016	.86	.030	.380	.075	.180	SEE NOTE 3	94V-2 6/6 NYLON	
	M-2210	YELLOW	26-24	.187x.020	.016	.78	.030	.316	.075	.160			
	M-2211	YELLOW	26-24	.187x.032	.016	.78	.030	.316	.075	.160			
	M-2213	YELLOW	26-24	.110x.020	.012	.78	.034	.230	.095	.150			
	AA-2201	RED	22-18	.250x.032	.016	.86	.058	.380	.135	.180			
	AA-2213	RED	22-18	.205x.020	.016	.78	.058	.316	.135	.160			
	AA-2214	RED	22-18	.205x.032	.016	.78	.058	.316	.135	.160			
	AA-2202	RED	22-18	.187x.020	.016	.78	.058	.316	.135	.160			
	AA-2203	RED	22-18	.187x.032	.016	.78	.058	.316	.135	.160			
AA-2204	RED	22-18	.110x.020	.012	.78	.058	.230	.135	.150				
E	AA-2205	RED	22-18	.110x.032	.012	.78	.058	.230	.135	.150	SEE NOTE 3	94V-0 6/6 NYLON	
	BB-2206	BLUE	16-14	.250x.032	.016	.86	.083	.380	.160	.180			
	BB-2215	BLUE	16-14	.205x.020	.016	.78	.083	.316	.160	.170			
	BB-2216	BLUE	16-14	.205x.032	.016	.78	.083	.316	.160	.170			
	BB-2207	BLUE	16-14	.187x.020	.016	.78	.083	.316	.160	.170			
	BB-2208	BLUE	16-14	.187x.032	.016	.78	.083	.316	.160	.170			
	19606-0001	YELLOW	12-10	.250x.032	.018	1.04	.120	.380	.240	.220			PLASTIC STRIP
	19606-0002	YELLOW	12-10	.250x.032	.018	1.04	.120	.380	.240	.220			LOOSE PIECE
	19606-0003	YELLOW	12-10	.250x.032	.018	1.04	.120	.380	.240	.220			TAPE MOUNT
	AA-2201VN	NATURAL	22-18	.250x.032	.016	.86	.058	.380	.135	.180			SEE NOTE 3
BB-2206VB	BLACK	16-14	.250x.032	.016	.86	.083	.380	.160	.180				
C-2265VN	NATURAL	12-10	.250x.032	.018	1.04	.145	.380	.275	.290				

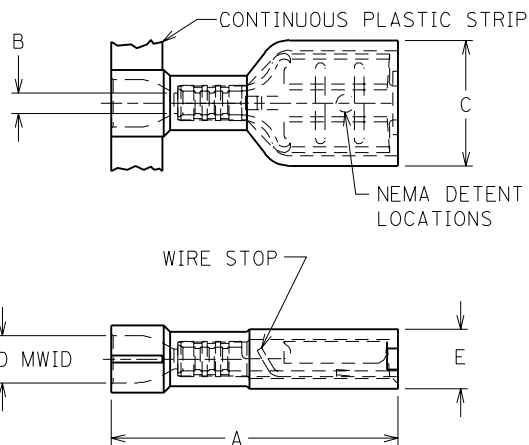

1. MATERIAL: TERMINAL: BRASS
PLATING: ELECTRO-TIN
FERRULE: BRASS
PLATING: ELECTRO-TIN
INSULATION: NYLON 6/6 SEE CHART
COLOR: SEE CHART
2. MWID[®] = MAXIMUM WIRE INSULATION
DIAMETER
3. FOR CONTINUOUS PLASTIC STRIP
ADD "C" TO PART NUMBER. FOR TAPE
MOUNT ADD "T".

CUSTOMER DRAWING

DIMENSIONS SHOWN (METRIC) INCH			
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 1/2^\circ$			
	INCH	METRIC	
3 PLACE	$\pm .005$	$\pm \text{---}$	
2 PLACE	$\pm .01$	$\pm .013$	
1 PLACE	$\pm \text{---}$	$\pm .025$	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY	RCM	CHK'D. BY	JM
APP'D. BY	FP	SCALE	NO: NE

REVISE ONLY ON CAD SYSTEM

TITLE	INSULKRIMP FEMALE F.I.Q.D. STANDARD FLARE
-------	---

 ETC INC. PINELLAS PARK, FLA. 33781 U.S.A.		SHEET NO.	DATE
PART NO.		DRWG. NO.	06/17/94
SEE CHART		CD-2905	
FILE NAME CD2905	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX-ETC INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		DIV. E SIZE B