

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F





E

D

C

B



A

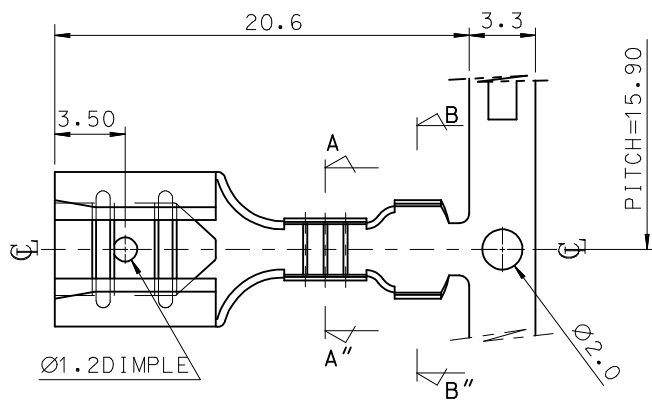

NOTES

1. MATERIAL : BRASS 0.40 $\pm$ 0.03 THK'
2. FINISH : POST-TIN PLATING
3. RECOMMENDED LENGTH OF WIRE STRIP IS 5.3-5.8

"D"

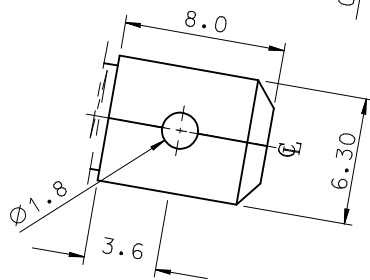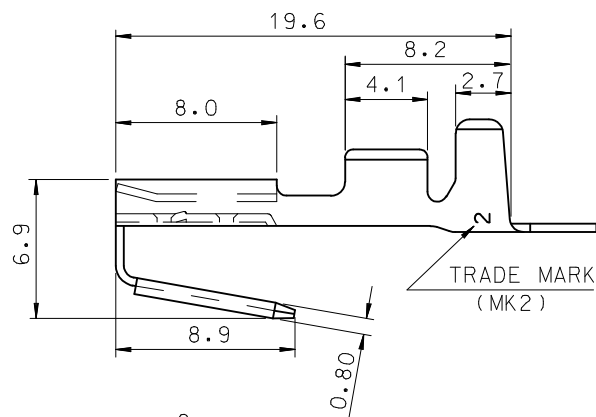

MATERIAL NO.	PART NO.	W1	H1	W2	H2	WIRE	INSUL.DIA.
357253910	35725-3910	3.1	3.8	4.9	5.6	AWG#18-#16	MAX.Ø3.12
357254910	35725-4910			6.5	6.35	AWG#14	MAX.Ø3.50
357255910	35725-5910	4.0	4.2			AWG#12	MAX.Ø3.98

WIRE : UL1015

(B1)

REVISED EC NO: KOR2012-0110 DRWN: HYOU CHKD: SH. CHU APPR: YSK IM02	2012/04/23 2012/04/25	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
						DRAWN BY W.Y.YANG	DATE 1993/06/26	TITLE .250 PIGGY BACK			
						CHECKED BY B.K.CHOI	DATE 1993/06/26				
						APPROVED BY C.W.LEE	DATE 1993/06/26				
				ANGULAR ± 1 °		MATERIAL NO.					DOCUMENT NO.
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-35725-*910			
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1