ENG. NO SD 35725-3**0


EDP NO.


SIMILAR ITEM


PROJECT NO. .250 SLIP-IN REC'


NOTES

1. MATERIAL : BRASS, 0.35mm THICKNESS
   THICKNESS : 0.35 mm
2. FINISH : UNPLATED(35725-3300/3400/3500)
   POST-TIN PLATING(35725-3310/3410/3510)
3. RECOMMENDED LENGTH OF WIRE STRIP IS 5.2-5.8 mm

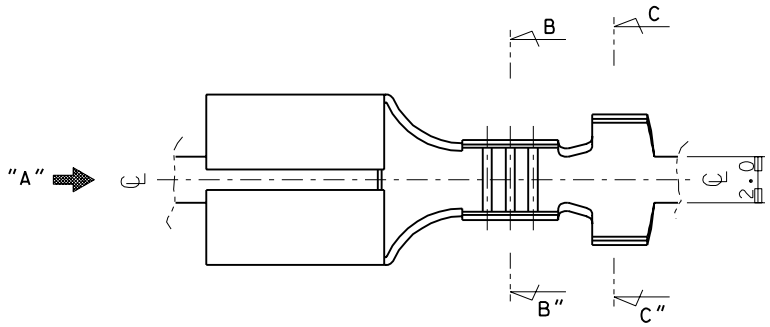


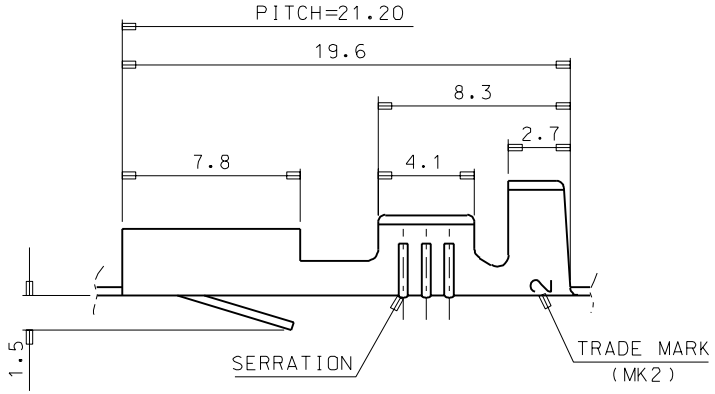

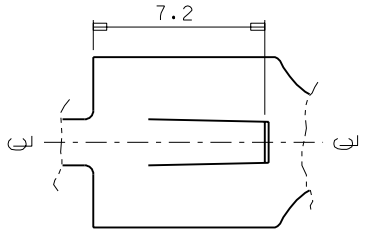




VIEW "A"



SECTION B-B"



SECTION C-C"

ENG. NO.	a	b	d	e	WIRE RANGE	Q'TY/REEL
35725-33*0	5.2	4.6	6.3	6.3	AWG #14-#10	4,000
35725-34*0	3.5	3.5	5.7	5.0	AWG #18-#14	5,000
35725-35*0	2.85	2.9	3.8	3.8	AWG #22-#20	5,000

WIRE RANGE
SEE TABLE

INSULATION RANGE

DIE FEED:

APPLICATOR FEED: 21.2

Q'TY/ REEL OR PACK
SEE TABLE

LTR	REVISION RECORD	ECN	DATE
B	REVISED	95-007	95.1.17
A	CAD REDRAWING		93.6.3

REVISE ONLY ON CAD SYSTEM

MATERIAL
SEE NOTES

GENERAL TOLERANCE
DIMENSION : 1Pl cs: ±0.30
~~ANGLE :~~ 2Pl cs: ±0.20

DIMENSION CLASSIFICATION
▽ : CRITICAL ▼ : MAJOR
( ) : REFERENCE

ASS'Y PART
DESCRIPTION | ENG. NO.

MOLEX-KOREA CO.,LTD.

DRAWN BY J.S.KANG | CHK'D BY

APP'D BY | SCALE 5:1(CAD)

TITLE: .250 SLIP-IN REC' | SHEET 1 OF 1

ENG. NO. SD 35725-3**0 | REV B

THIS DROWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(KOREA) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MX-A3(ANSI:290,420)