


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
				L ± .03 [0,8]	W ± .02 [0,5]	H ± .02 [0,5]	MAX WIRE INSULATION DIA.	
EDNF10-250FI	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.95 [24,1]	.36 [9,1]	.27 [6,9]	.22 [5,6]	CT-100A CT-460 CT-550 CT-600-A CT-1551 CT-2500

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - STRANDED COPPER WIRE ONLY
 - 600V MAX VOLTAGE RATING
 - 257°F (125°C) MAX TEMP RATING
- MATERIAL:
 - STAMPING - BRASS, TIN PLATED
 - SLEEVE - COPPER OR BRASS, TIN PLATED
 - HOUSING - NYLON 6/6, COLOR IS TRANSLUCENT
- WIRE STRIP LENGTH $9/32'' \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7.1mm $\begin{smallmatrix} +0.8 \\ -0 \end{smallmatrix}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX.
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

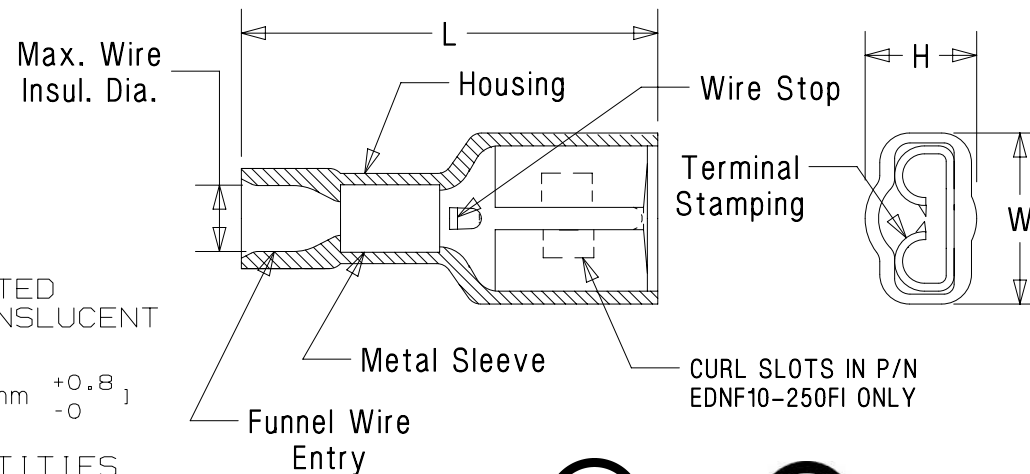

LISTED
20H3
E78522



CERTIFIED
LR31212

TITLE STRONGHOLD FEMALE DISCONNECTS (250 SERIES) FULLY INSULATED NYLON, METAL SLEEVE #12-10 AWG					
CUSTOMER DRAWING					
ITEM REVISION NAME			00123SHG/00		
DATASET FILE NAME			00123SHG/00		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			MATERIAL: SEE NOTES		
THIRD ANGLE PROJECTION			DRAWING NUMBER: SH41672		
DRAWN BY	DATE	CHK	SCALE	SIZE	
JHNU	02/18	TMR	NTS	A	

00	2/18	JHNU	TMR	RGB	RELEASED	00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN