


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K2	REVISED PER ECR-15-013036	03SEP2015	NK	DC

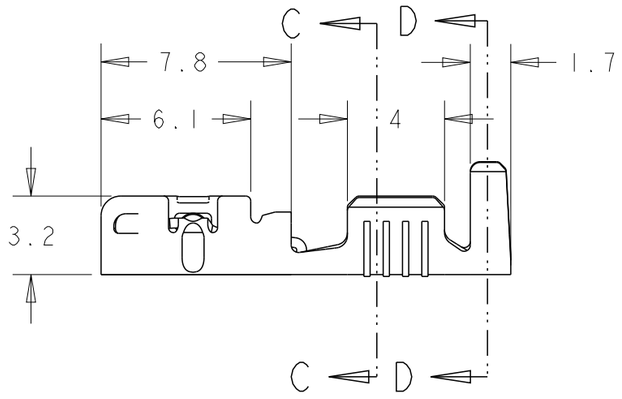




PACKAGING DETAILS:
QUANTITY PER REEL: 8000 PCS(END FEED).
SPLICES FREE





Left-sided product




Right-sided product

Rango de hilo de 0,5 a 1,5 mm²
Wire range from 0.5 to 1.5 mm²
Diametro de aislante max 3,0 mm
Max. Insulation Diameter 3.0 mm

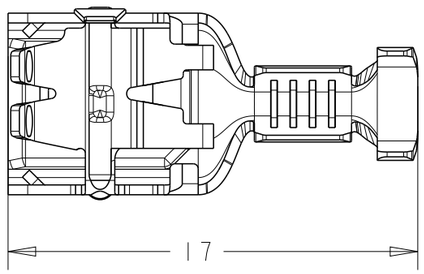

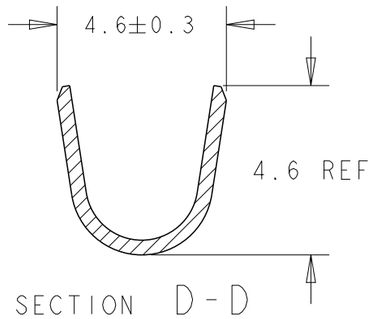


SECTION D-D
SCALE 6:1

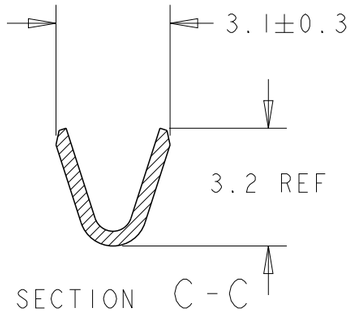

SECTION C-C
SCALE 6:1

336075-7 (REELED WITH PAPER INTERLEAVE)	Laton Brass	Preestañado Pre-Tin
336075-6	CuNiSi	Preestañado Pre-Tin
336075-5	Acero Steel	Preniquelado Pre-Ni
336075-3	Laton Brass	Preestañado Pre-Tin
336075-1	Laton Brass	-
Guion Dash	Material	Acabado Finish

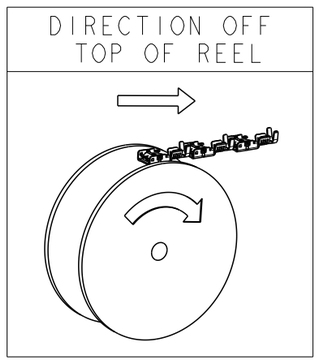

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.5
1 PLC ±0.5
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: Table - | FINISH: Table -

DWN J. Saló 22 Dec 04
CHK L. L 22 Dec 04
APVD - -
PRODUCT SPEC 108-22128 Brass 108-22150 Pre-Ni Steel
APPLICATION SPEC 114-22017
WEIGHT -

TE Connectivity

NAME
E-SPRING CONTACT 6,35 Receptaculo
6.35 Receptacle E-SPRING CONTACT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-336075	-

Customer Drawing | SCALE 4:1 | SHEET 1 OF 1 | REV K2