


MATERIAL NUMBER	ENGINEERING NUMBER	WIRE RANGE AWG	TAPED MATERIAL NUMBER	TAPED ENGINEERING NUMBER	T MAX	B MAX	F MIN	L MAX	E MIN	D1 MIN	D MAX	H NOMINAL
192030373	192030373	16-14	192030467	19203-0467	.030/.75	.239/6.06	.252/6.40	.587/14.92	.173/4.40	.083/2.10	.138/3.50	1.184/30.07
192030390	192030390	16-14	192030469	19203-0469	.030/.75	.302/7.66	.307/7.80	.666/16.92	.173/4.40	.083/2.10	.138/3.50	1.184/30.07
192030379	192030379	12-10	192030468	19203-0468	.030/.75	.302/7.66	.307/7.80	.706/17.92	.213/5.40	.130/3.30	.185/4.70	1.235/31.37

B1

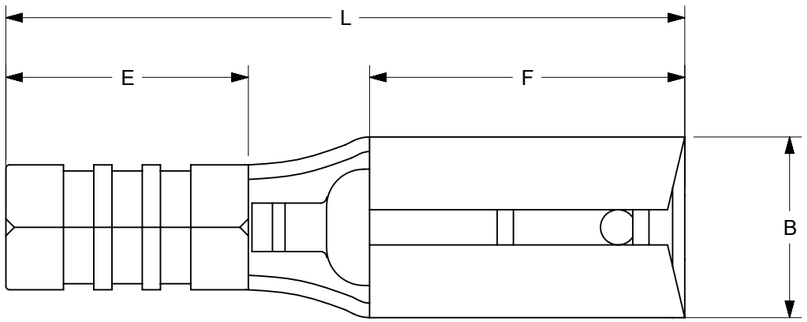



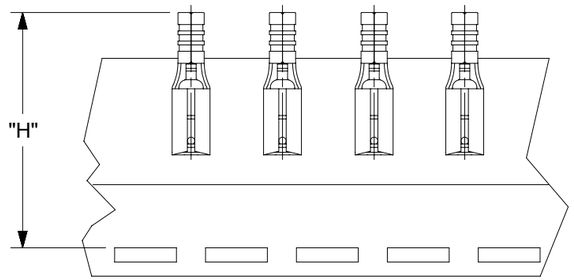

TAPE MOUNTING LOCATION

NOTES:

1. MATERIAL: STEEL .016/0.40 THICK REF.
2. FINISH: NICKEL PLATED WITH OPTIONAL COPPER FLASH UNDERPLATING, IS ALLOWED FOR IMPROVED ADHESION.
3. PART IS ROHS COMPLIANT.
4. AMBIENT OPERATING TEMPERATURE UP TO 900 °F (483 °C).

B1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: E/A = 0; E/C = 0; E/P = 0

DIVISIONAL SYMBOLS

DIMENSION UNITS: IN/MM | SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	±	±
1 PLACE	±	±
0 PLACES	±	±
ANGULAR TOL	± °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMASTERED IN ECTR AND UPDATED NOTE

EC NO: 708789
DRWN: PAWANC 2022/05/12
CHK'D: DMYRICK 2022/06/01
APPR: JMACNEIL 2022/06/02

INITIAL REVISION:
DRWN: ASAYDEH 05/12/02
APPR: R DEROSS 05/12/02

THIRD ANGLE PROJECTION | DRAWING: B-SIZE | SERIES: 19203

molex

KRIMPTITE
QUICK DISCONNECT, STEEL, 900 DEG F (483 DEG C)

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-19203-025	PSD	001	B1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE CHART	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/06/02 15:20:38

FORMAT: Eng-lega-master-tb-prod-B
REVISION: E1
DATE: 2021/05/01