
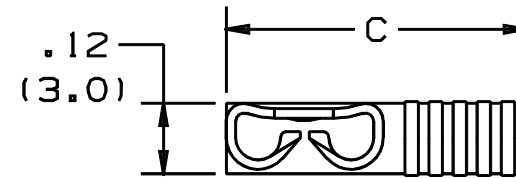


PART NUMBER	TAB SIZE	WIRE RANGE AWG	DIMENSIONS in.		
			A $\pm .02$	B $\pm .01$	C $\pm .02$
DR18-205B	OR .205 X .032 .187 X .032	22-18	.53 (13.5)	.25 (6.4)	.54 (13.7)
DR14-205B	OR .205 X .032 .187 X .032	16-14	.55 (14.0)	.25 (6.4)	.54 (13.7)
DR18-206B	OR .205 X .020 .187 X .020	22-18	.53 (13.5)	.25 (6.4)	.54 (13.7)
DR14-206B	OR .205 X .020 .187 X .020	16-14	.55 (14.0)	.25 (6.4)	.54 (13.7)

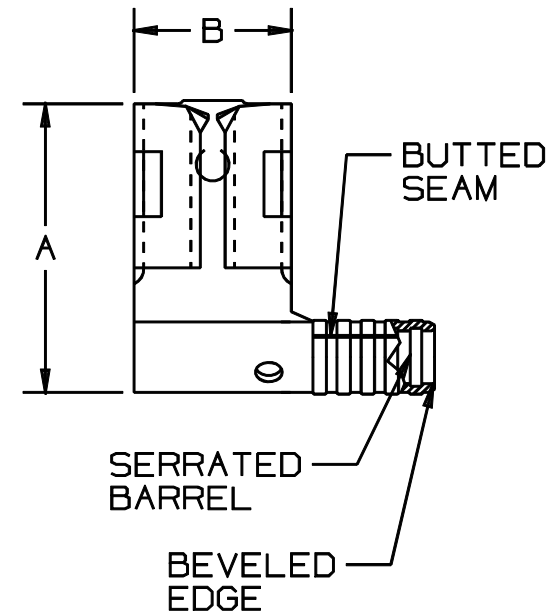

NOTES:

- USED FOR:
 - 302° F (150° C) MAX. TEMP. RATING
 - STRANDED COPPER WIRE ONLY
- MATERIAL:
 - STAMPING - .018" (0.46) THK BRASS, TIN PLATED
- PACKAGE QTY: STD. PKG. - C = 100
BULK PKG. - M = 1000
- FIRST INSERTION FORCE - 12 LB. (53N) MAX
FIRST WITHDRAWAL FORCE - 12 LB. (53N) MAX
6 LB. (27N) MIN
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
CT-100 (POCKET B)
CT-200, CT-1570
- WIRE STRIP LENGTH: 9/32 $\pm 1/32$ (7.1 ± 0.8)

CERTIFIED
LR31212

(DR18-205B & DR18-206B ONLY)

A41327_05

5	1/01	RM		FILESPEC WAS N41327AA_PCD_04						P PANDUIT CORP. TINLEY PARK, ILLINOIS			
4	4-98	ED		ADDED SLOTS	06755								
-	----	----	----	FILESPEC WAS: A41327A_03						NON-INSULATED, BUTTED SEAM RIGHT ANGLE FEMALE DISCONNECT .205B/.206B SERIES			
3	12-95	ED	RLS	REVISION TO NOTES	03836		LA	TFK					
REV	DATE	BY	CHK	DESCRIPTION	ECN	QA	CUST	PM	APP	DRAWN BY DAW	CHK'D CJH	SCALE NONE	DRAWING NO. A41327