

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	W	REVISED PER ECR-13-004343	30JUL13	KH	KR

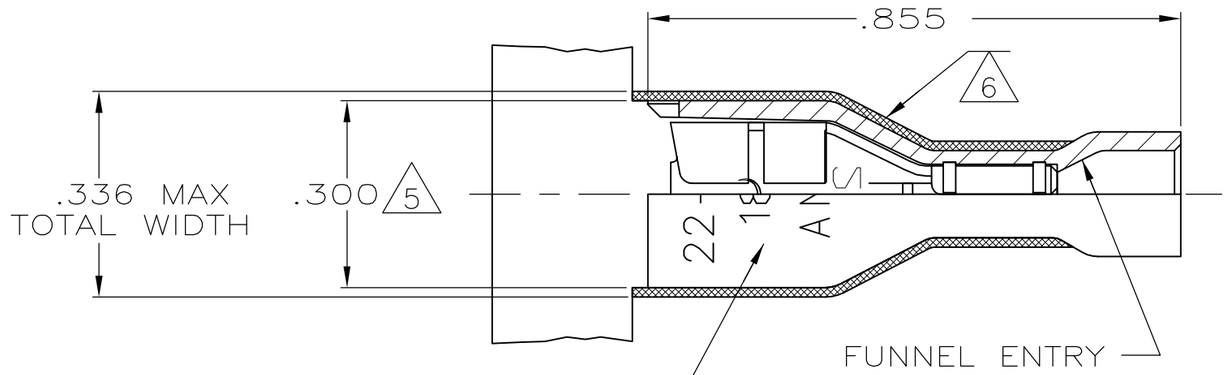

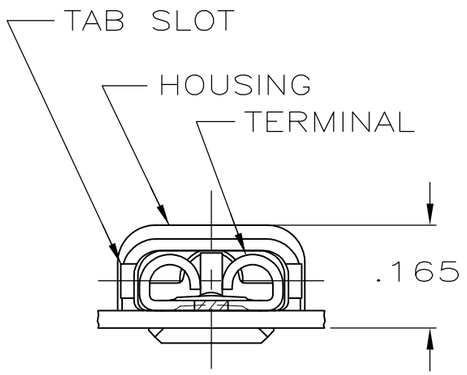

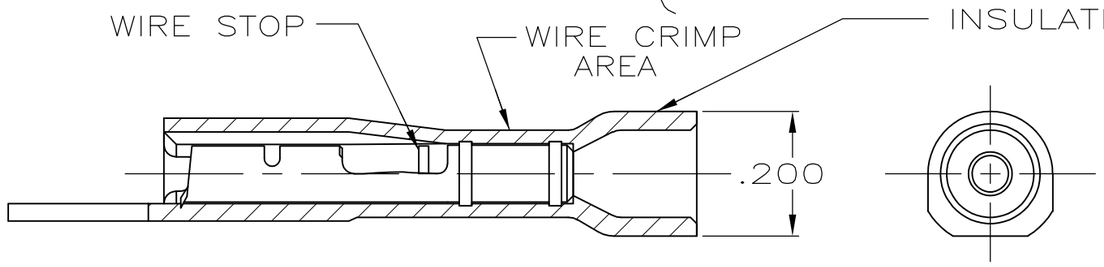

1 MATES WITH .020±.001x.187 TAB

2 WIRE STRIP LENGTH .281

3 INSULATION SIZE .135 MAX DIA

4 CONTINUOUS STRIP ON REELS

5 DIMENSION DOES NOT INCLUDE TRIM BURR

6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

PACKAGING	MATERIAL & FINISH	PART NO
STANDARD	HOUSING:NYLON,COLOR–BLACK TRANSLUCENT RECEPTACLE:BRASS TIN	9–520181–2
BULK	HOUSING:NYLON,COLOR–RED TRANSLUCENT RECEPTACLE:BRASS TIN	5–520181–2
STANDARD	HOUSING:NYLON,COLOR–RED TRANSLUCENT RECEPTACLE:#3 HARD PHOS BRONZE TIN	2–520181–4
	HOUSING:NYLON,COLOR–RED TRANSLUCENT RECEPTACLE:BRASS TIN	2–520181–2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .015
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	P FORTNEY	10/7/88
CHK	MS FEHER	10/10/88
APVD	K RANDOLPH	10/10/88
PRODUCT SPEC	108–2043	
APPLICATION SPEC	114–2123	
WEIGHT	–	

TE Connectivity

NAME: RECEPTACLE ASSY,ULTRA–FAST, .187 SERIES,22–18 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–520181	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV W