

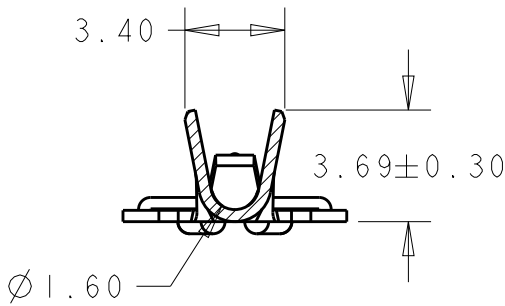


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	18MAY2018	JH	PKS
	AI	REVISED PER ECR-19-015041	04NOV2019	PC	MB

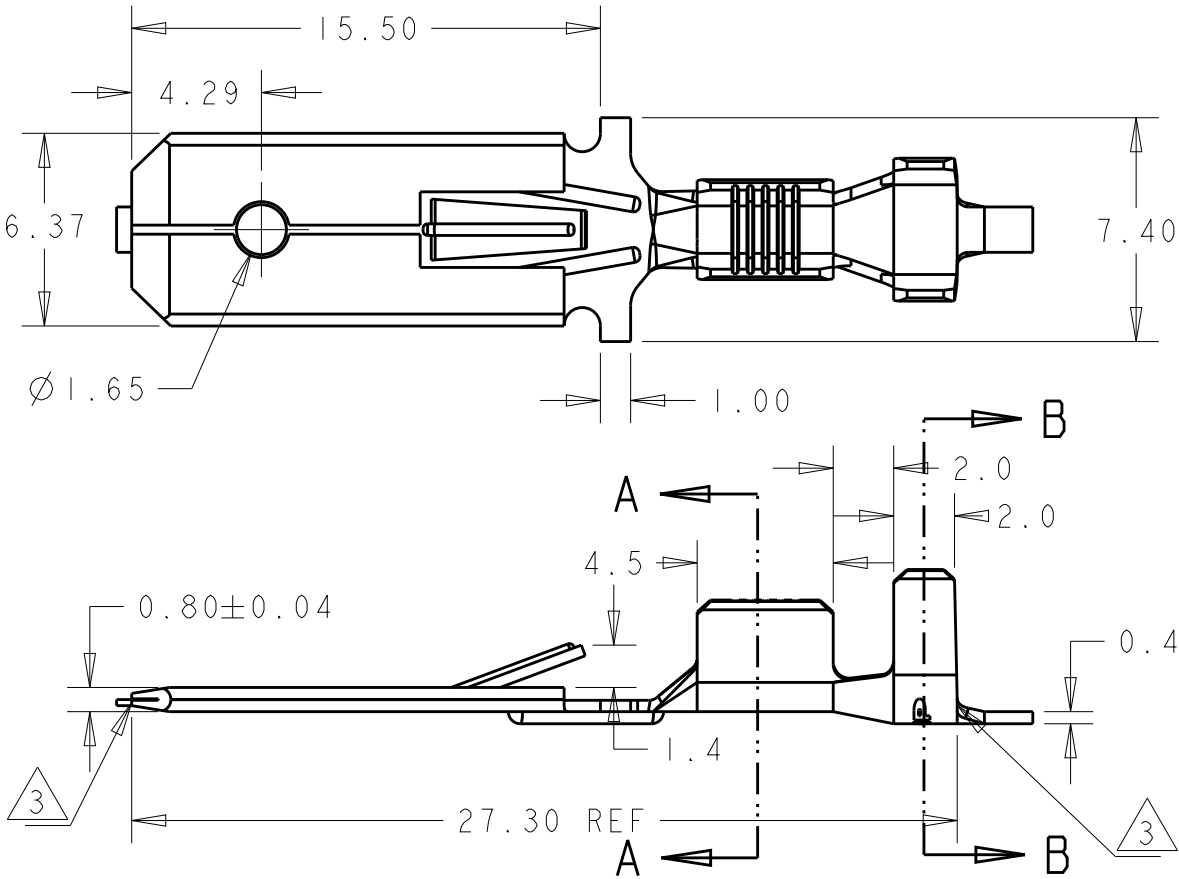


SECTION A - A

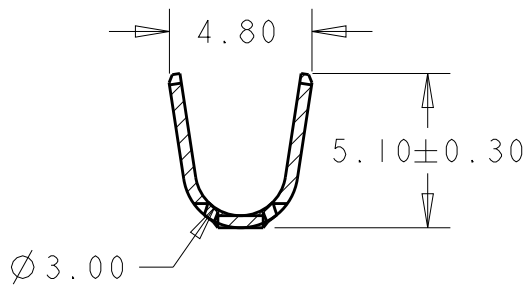

SECTION B - B

- NOTES: .
- 1. WIRE BARREL CRIMP, "F Crimp":
CRIMP WIDTH 2.54mm (.100)
CRIMP HEIGHT (±0.05mm)=(TOTAL CMA+8000)*25.4/171100
 - 2. INSULATION BARREL CRIMP: 4.06mm (.160) "OVERLAP"
 - 3 0.5 MAX CUT OFF TABS
 - 4. WIRE RANGE: MAGNET WIRE CMA 1500-5200
WIRE DIAMETER CANNOT BE LESS THAN 26AWG[0.40mm]
FOR SINGLE WIRE, THE BARE WIRE DIAMETER IS
FROM 0.90mm TO 1.60mm.
 - 5. INSULATION RANGE: Ø2.2 - Ø3.3mm
 - 6. NO VISIBLE OIL RESIDUE
 - 7. REELED WITH INTERLEAVE PAPER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JUSTIN HUANG 15SEP2016	2309591-1			PN
DIMENSIONS: mm		CHK TIM DING 15SEP2016	 TE Connectivity			
		APVD SENTHIL KUMAR 15SEP2016				
		PRODUCT SPEC 108-2086	NAME .250 SERIES FASTIN FASTON TAB - AMPLIVAR			
MATERIAL BRASS		APPLICATION SPEC 114-18022	SIZE A3	CAGE CODE 00779	DRAWING NO C-2309591	RESTRICTED TO -
FINISH UNPLATED		WEIGHT -	SCALE 4:1		SHEET 1	OF 1
		CUSTOMER DRAWING			REV AI	