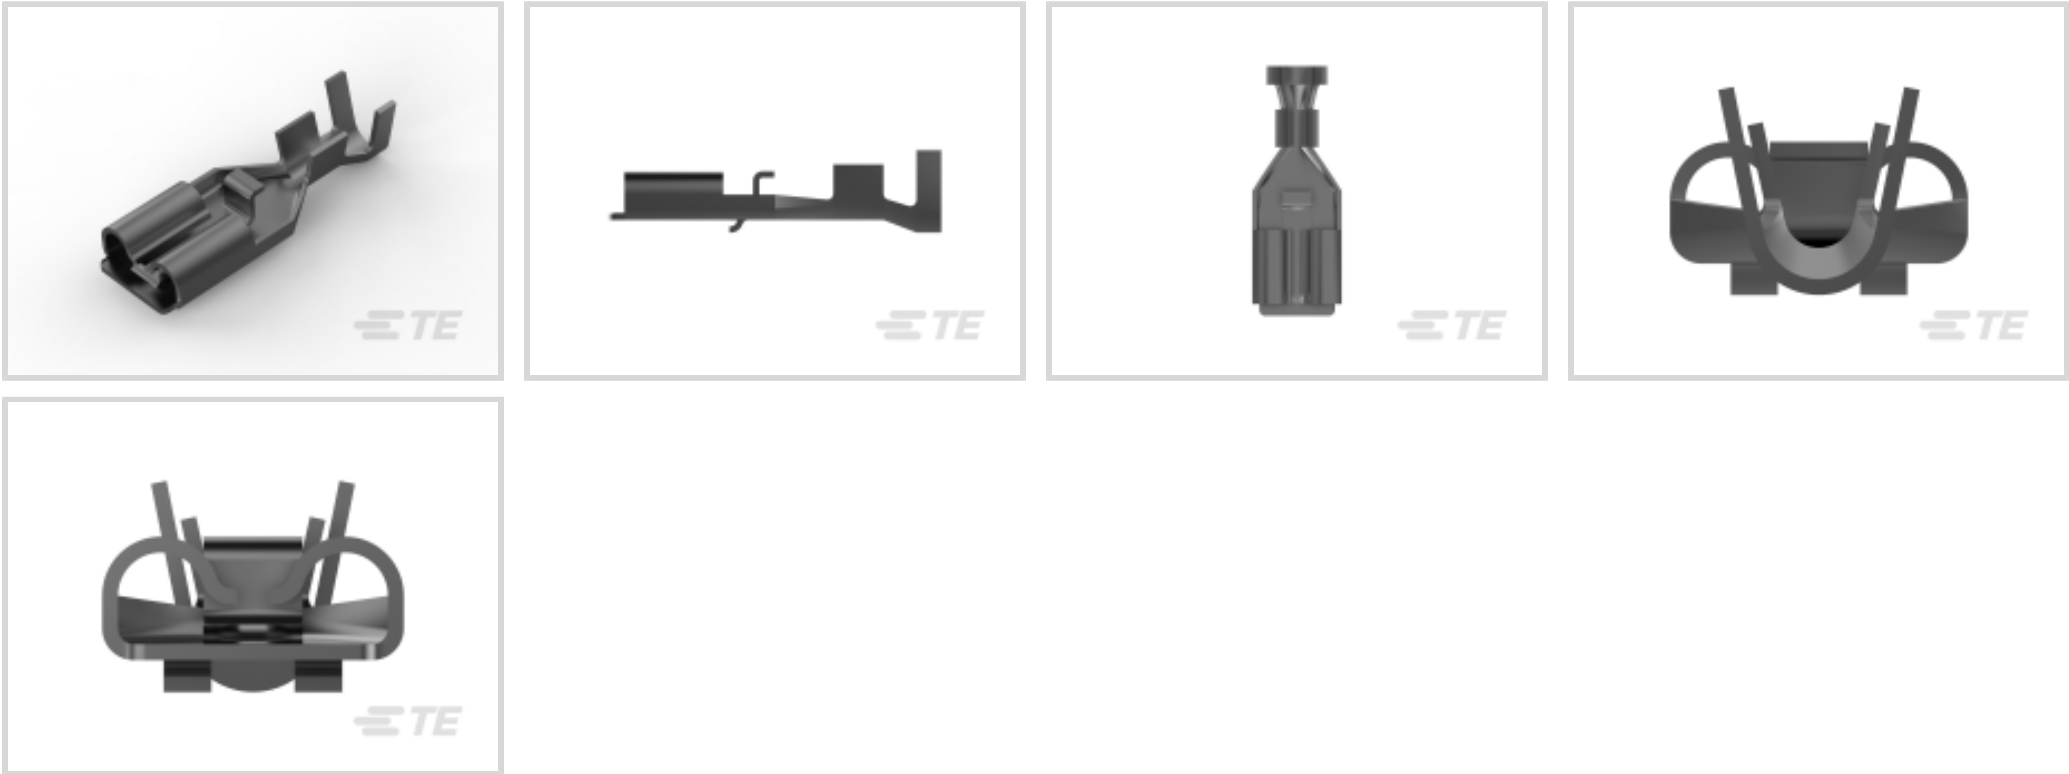




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Extraction Force	5.9 – 29.4 Newton
Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	21.2 mm[.834 in]
Compatible Insulation Diameter Range	2.21 – 3.4 mm[.087 – .134 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Agency/Standard	UL
-----------------	----

Packaging Features

Packaging Quantity	4500
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>








EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

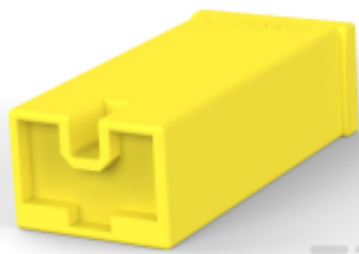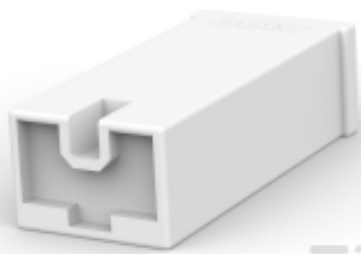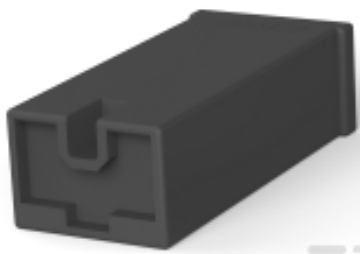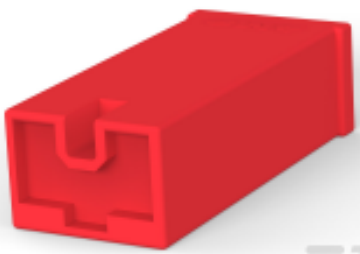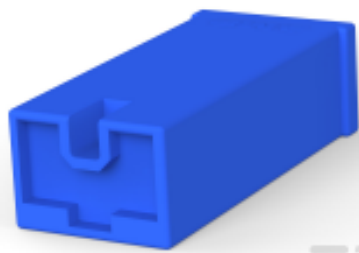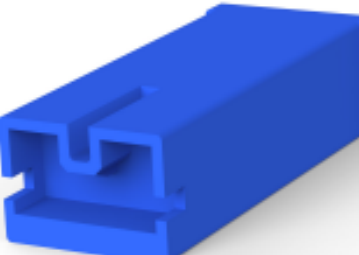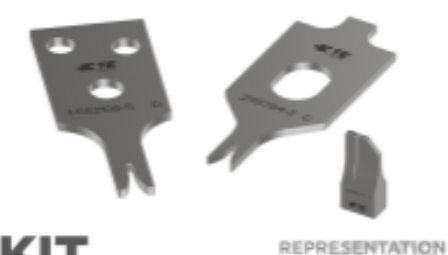Compatible Parts

 TE Part # 179970-4 PL EXII 250 REC HSG 1P NYLON YELLOW	 TE Part # 179970-1 250 HSG. PL EX REC.	 TE Part # 179970-9 PL EXII 250 REC HSG 1P NYLON BLACK	 TE Part # 179970-2 PL EXII 250 REC HSG 1P NYLON RED
 TE Part # 179970-6 PL EXII 250 REC HSG 1P NYLON BLUE	 TE Part # 1318954-1 250 HSG. PL EX REC. NAT	 TE Part # 1939581-1 250 HSG. PL EX REC. 15mm 2P NAT	 TE Part # 1-1318954-1 PL EXII 250 REC HSG 1P NYLON NAT
 TE Part # 1-1318954-6 PL EXII 250 REC HSG 1P NYLON BLUE	 TE Part # 2-2150057-2 OCEAN_2.0_APPLICATOR-E-110F180F	 TE Part # 2150057-2 OCEAN_2.0_APPLICATOR-E-110F180F	 TE Part # 7-2150057-2 OCEAN_2.0_APPLICATOR-E-110F180F
 KIT TE Part # 7-2150057-7 OCEAN_2.0_SPARE_PART_KIT-110F180F	 TE Part # 3-179970-1 PL EXII 250 REC HSG 1P NYLON NAT WITH		



Also in the Series | Positive Lock 250



Automotive Terminals(1)



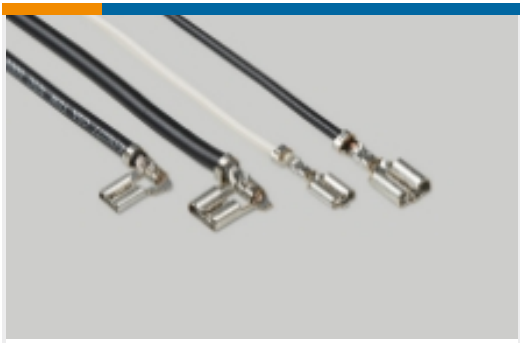
Crimp Terminal Housings(193)



Insertion & Extraction Tools(3)




Insulation Boots & Sleeves(4)




Quick Disconnects(186)

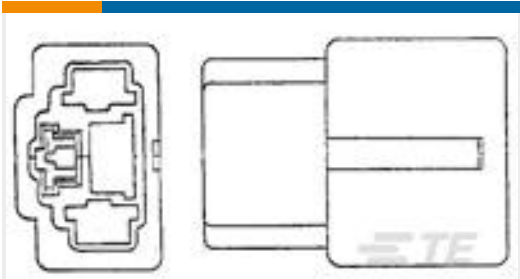
Customers Also Bought



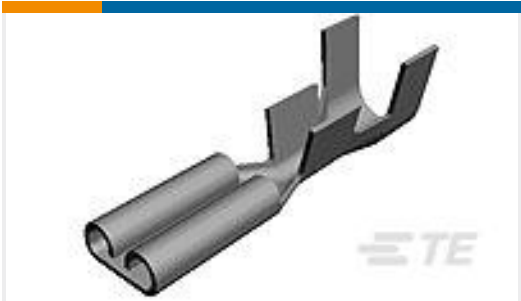TE Part #176773-5
FF 250 CAP HSG 3P NYLON NAT



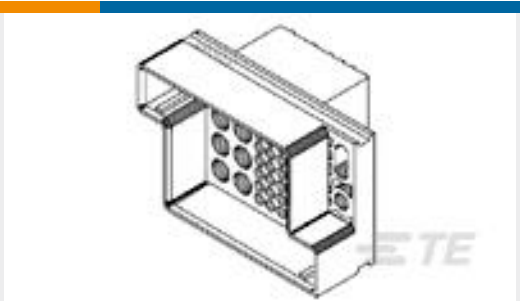TE Part #170213-2
250 FASTON,REC.,18-14 AWG,TPBR



TE Part #194243-1
AMPOWER HOUSING,RCPT,43 POS



TE Part #1971030-8
8POS Plug Housing for GIC 2.0 EV Series



TE Part #2314618-1
AMP PDL 3.96MM 4POS. PLUG(SGL ROW).



TE Part #2825340-1
PDL 2P PLUG HSG 3.96MM (GWT)



TE Part #1-176497-9
PL EX SLEEVE 250 FLAG BLACK 6/6 NYLON



TE Part #170140-6
187 FASTON,FLAG,REC.,16-20 AWG, TPBR

Documents

Product Drawings

250 PL EX REC. 18-14AWG PTBR

English

CAD Files

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_179974-1_J1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_179974-1_J1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_179974-1_J1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[Product Compliance Document](#)

English

[Product Compliance Document](#)

English

Instruction Sheets

[POSITIVE LOCK EX-II CONNECTORS, INSTRUCTION SHEET](#)

Japanese

[Instruction Sheet \(non U.S.\)](#)

English