
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	FIRST INITIAL	29JUN2016	HG	TD

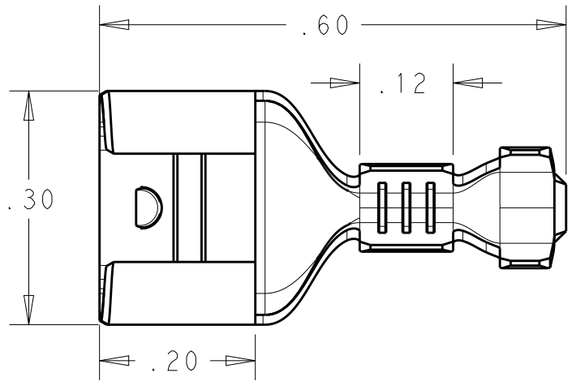


1:APPLICABLE WIRE RANGE:22-18AWG


2:APPLICABLE INSULATION RANGE:DIAMETER 0.094~0.110


3:COUNTERPART:STANDARD 250 TAB WITH HOLE STRUCTURE

4:RAW MATERIAL STOCK THICKNESS: 0.0126INCH


5:RECOMMONDED MATING TAB THICKNESS:0.032INCH

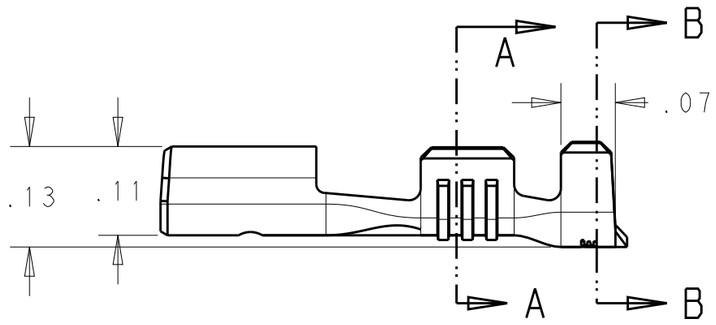





SECTION A-A



SECTION B-B

TIN-PLATED	BRASS	2238045-2
N/A	BRASS	2238045-3
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±.1
2 PLC	±.01
3 PLC	±.005
4 PLC	±.0005
ANGLES	±-

MATERIAL: BRASS

FINISH: - SEE TABLE

DWN	Hogan Guo 29JUN2016
CHK	Tim Ding 29JUN2016
APVD	Tim Ding 29JUN2016
PRODUCT SPEC	108-106216
APPLICATION SPEC	114-106216
WEIGHT	0.67 GR

TE Connectivity

NAME: RECEPTACLE, FASTON, .250 SERIES -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-2238045	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV A