

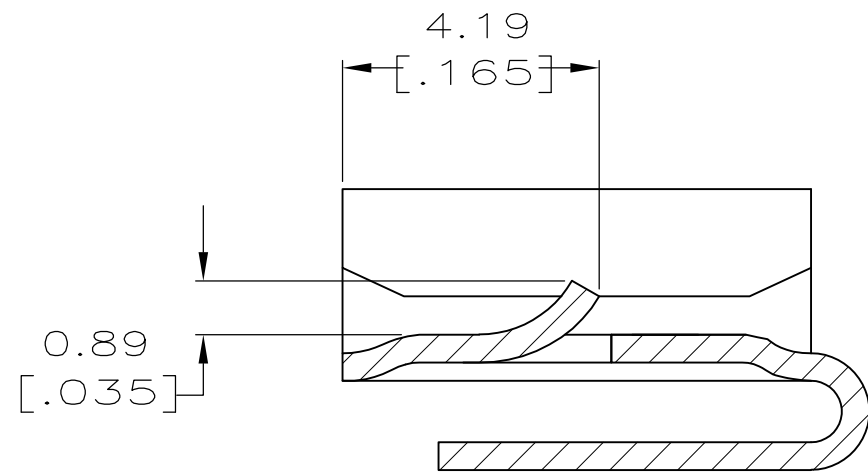
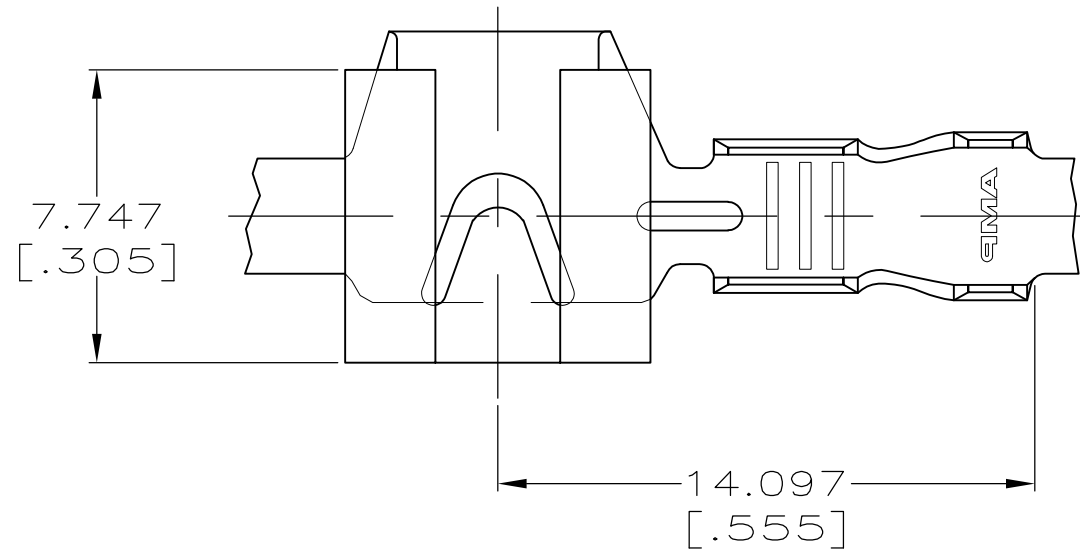



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		F	REVISED PER ECR-12-013518	23NOV2012	KH	PD

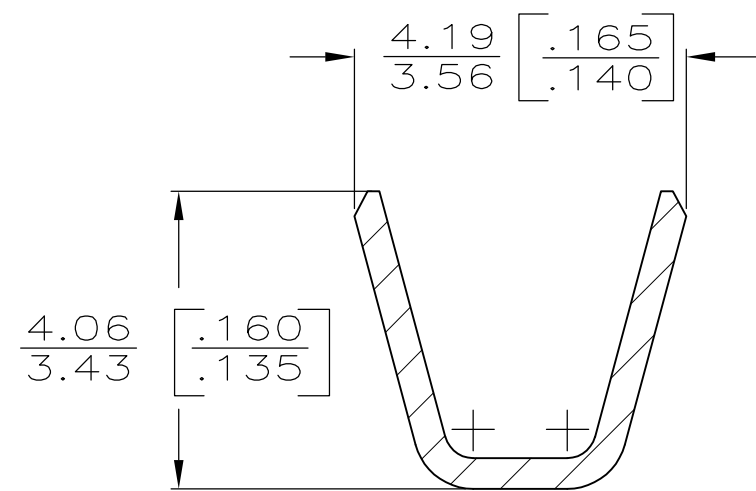


SECTION A-A
SCALE 8:1

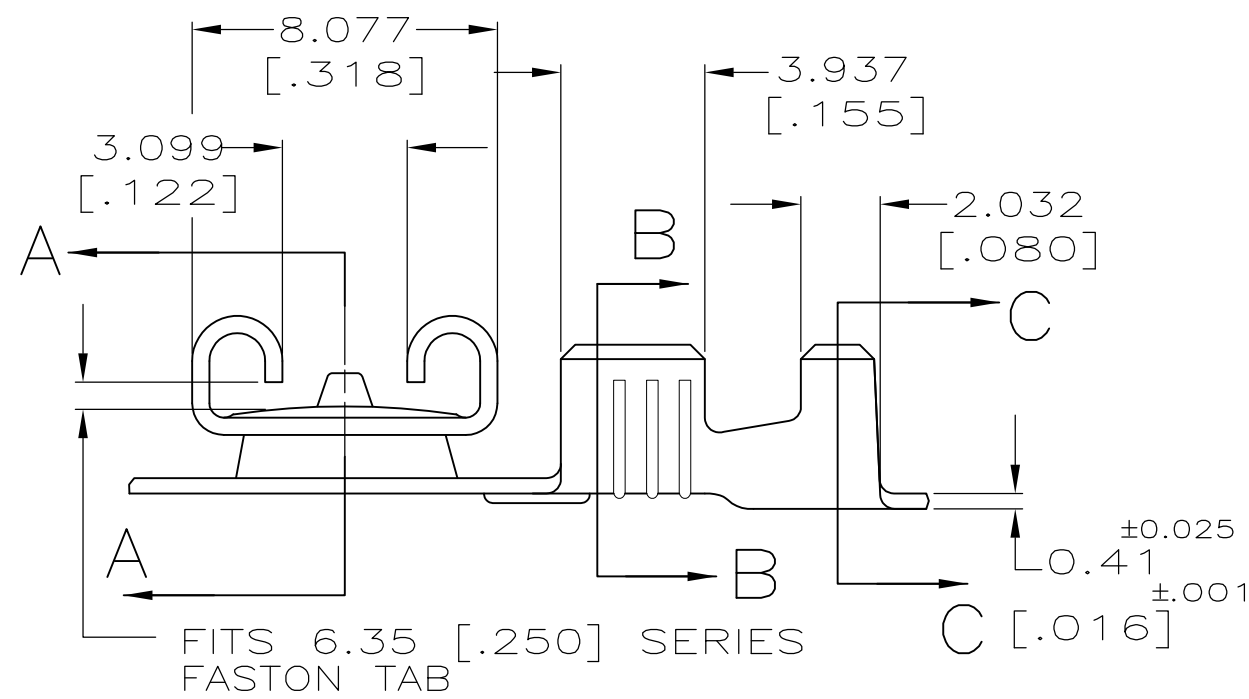

SECTION B-B
SCALE 10:1

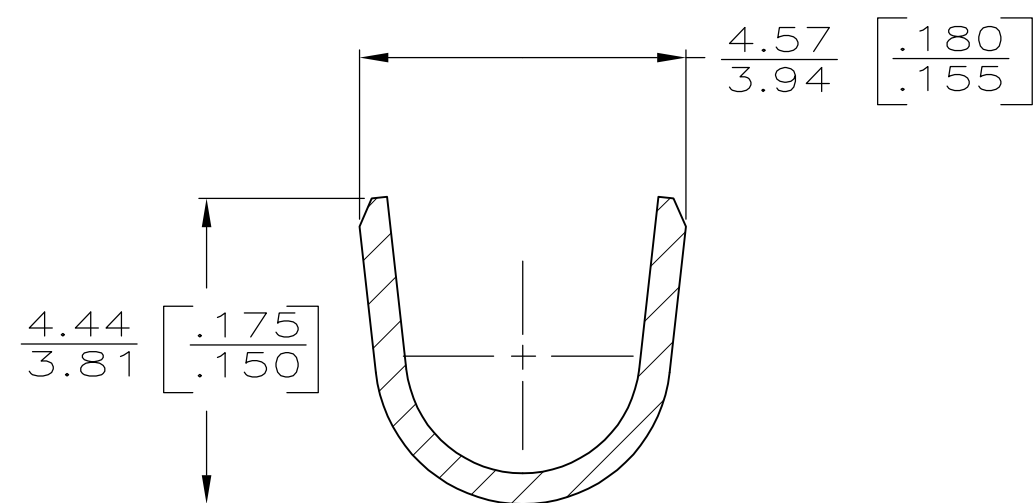

SECTION C-C
SCALE 10:1

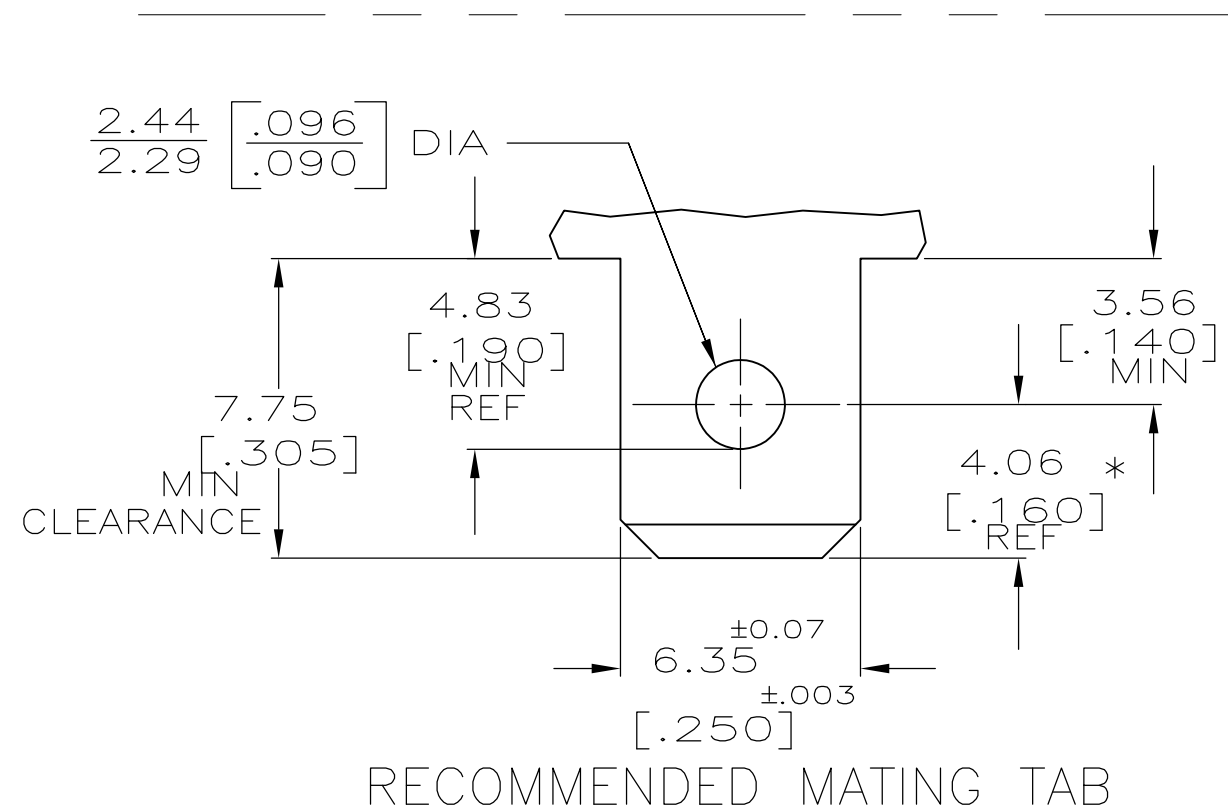

RECOMMENDED MATING TAB

MAT'L:1/2 H BRASS OR NICKEL PL STL

* TO BE USE ONLY WHEN SHOULDER IS ELIMINATED

0	3.56 [.140]	5.59 [.220]	F	3.30 [.130]
TYPE	WIDTH	STRIP LENGTH ±.015	TYPE	WIDTH
INSUL BARREL CRIMP			WIRE BARREL CRIMP	

2.29-3.30 [.090-.130]	0.8-2.0mm ² [18-14]	0.81 [.032]	63541-1
INSUL RANGE	WIRE SIZE	MATING TAB THK ±.001	PART NO
1.75 [.069]	2.0mm ² [14]	DWN JR RUTH 6/27/89	TE Connectivity
1.55 [.061]	1.3mm ² [16]	CHK P FORTNEY 6/27/89	
1.42 [.056]	0.8mm ² [18]	APVD J GILLESPIE 6/27/89	
±.051 [.002]	HEIGHT	PRODUCT SPEC	
4.06 [.160]	WIRE	APPLICATION SPEC	RECPT., FASTON, FLAG, REVERSIBLE, LOCK-ON, 6.35 [.250] SERIES
±.001		WEIGHT	
±.001		CUSTOMER DRAWING	
±.001		SCALE 5:1	
±.001		SHEET 1 OF 1	REV F