

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


0

REL. PER 97-1164-001 & 97-3096-001


11AUG97

ME

BB

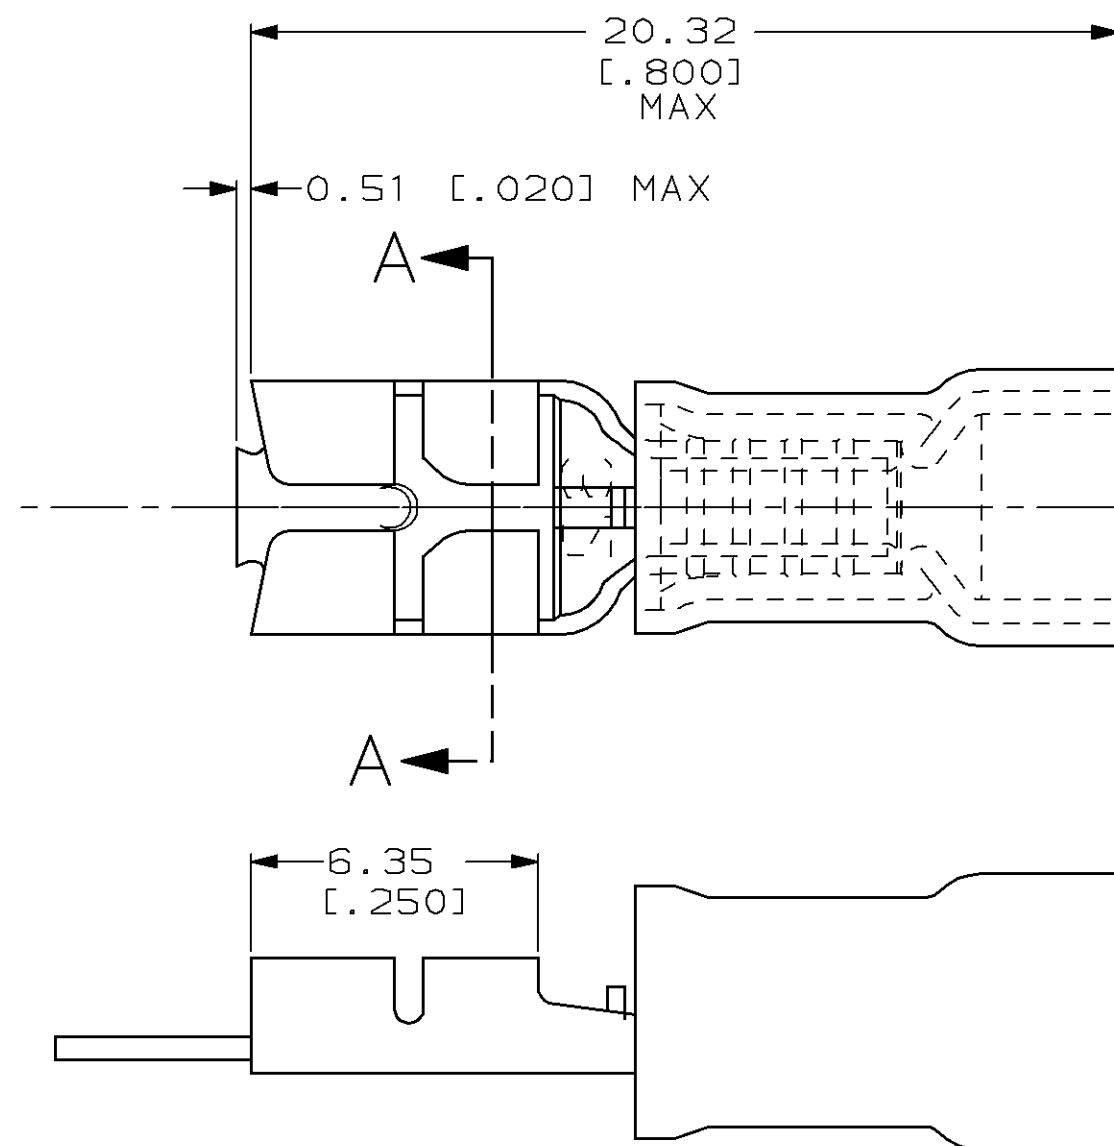

1 INSULATION DIA 3.43 [.135] MAX
2 FITS TAB 0.51 [.020] THK

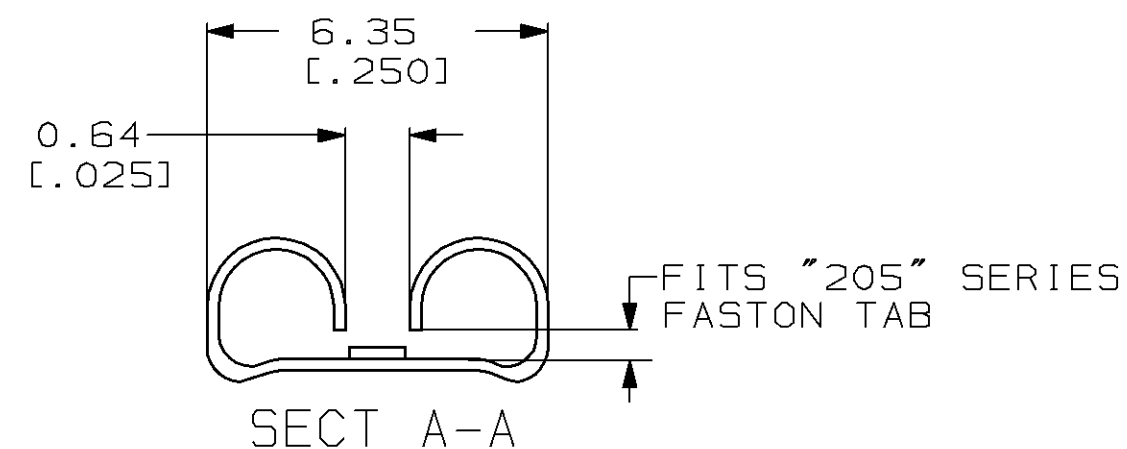

4000	TAPE MOUNTED	696018-2
1000	LOOSE PIECE	696018-1
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

MAX RECOMMENDED OPERATING
TEMPERATURE:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
M ELLIS

11AUG97

CHK
B BARE

11AUG97

APVD
C FOX

11AUG97

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

AMP

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
RECEPTACLE, 205 SERIES,
FASTON™ P1DG™
WIRE SIZE, 22-18 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-696018	-

SCALE	SHEET	OF	REV
6:1	1	1	0

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY


1-800-526-5142

VOLTAGE RATING:

CIRCULAR MIL AREA:

DIMENSIONS:

mm



MATERIAL
BODY, BRASS, .016
SLEEVE, NYLON, RED

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.38 [.015]
3 PLC	±-
4 PLC	±-
ANGLES	±-
FINISH	BODY, TIN