

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REVISED PER ECR-13-011489	30NOV2013	KH	PD

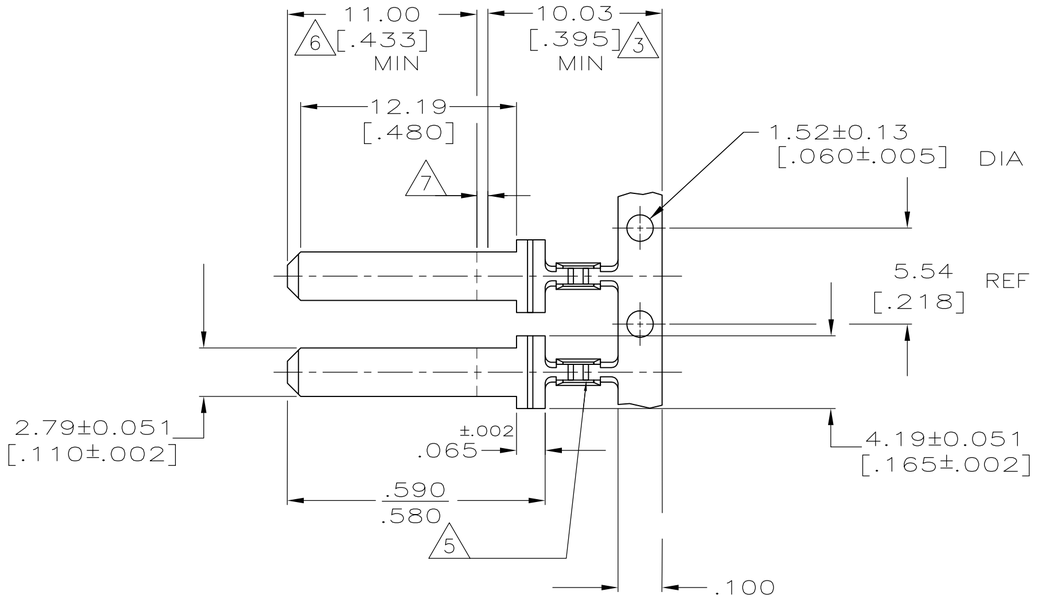

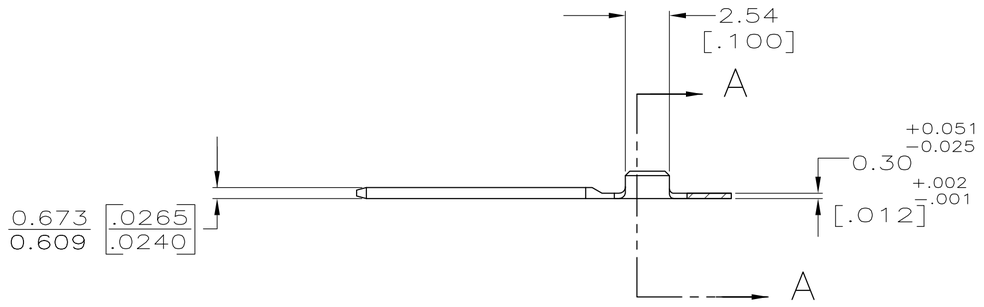

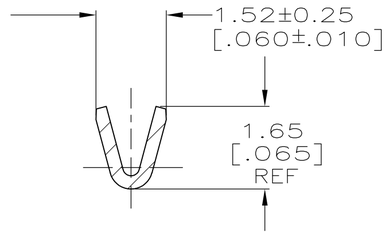

SECTION A–A
SCALE 10:1

1 CONTINUOUS STRIP ON REELS.

2 0.002032 [.000080] MIN NICKEL UNDERPLATE ALL OVER.

3 0.00254–0.00762 [.000100–.000300] THICK TIN LEAD PLATING IN THIS AREA ONLY.

4 WIRE SIZE IS #30 SOLID.

5 TWO WIRE CRIMP SERRATIONS LOCATED IN THIS AREA.

6 0.00076 [.000030] MIN THICK GOLD PLATING IN THIS AREA ONLY.

7 SOME BARE NICKEL MAY BE PRESENT AT THE TRANSITION BETWEEN THE GOLD & TIN–LEAD PLATING.

2 3 6 7	63535-3
0.00381 [.000150] MIN TIN	63535-1
FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25 [.010]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: BRASS
FINISH: SEE TABLE

DWN	JR RUTH	10/29/97
CHK	MS FEHER	10/29/97
APVD	P DESANTIS	10/29/97
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: TAB, SPECIAL
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-63535	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV L

63535