

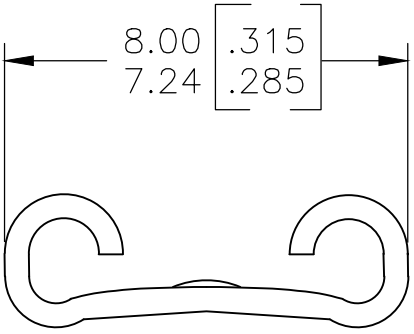


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	APVD
		J1		REVISED PER ECR-19-018151	12NOV2020	AA EW


- 1 CONTINUOUS STRIP ON REELS.
- 2 MATING TAB THK TO BE 0.81±0.025 [.032±.001].
- 3 WIRE SIZE IS #18-#14 AWG.
- 4 INSULATION RANGE IS 1.52-3.81 [.060-.150] DIA.
- 5 REEL WITH INTERLEAVING PAPER.
- 6 MATERIAL: BRASS
- 7 MATERIAL: HO4 PHOS BRZ
- 8 RECEPTACLE LENGTH CAN VARY UP TO 6.35 [.250] MAX, THIS SIDE ONLY.
- 9 PREPRODUCTION - FASR REQUIRED

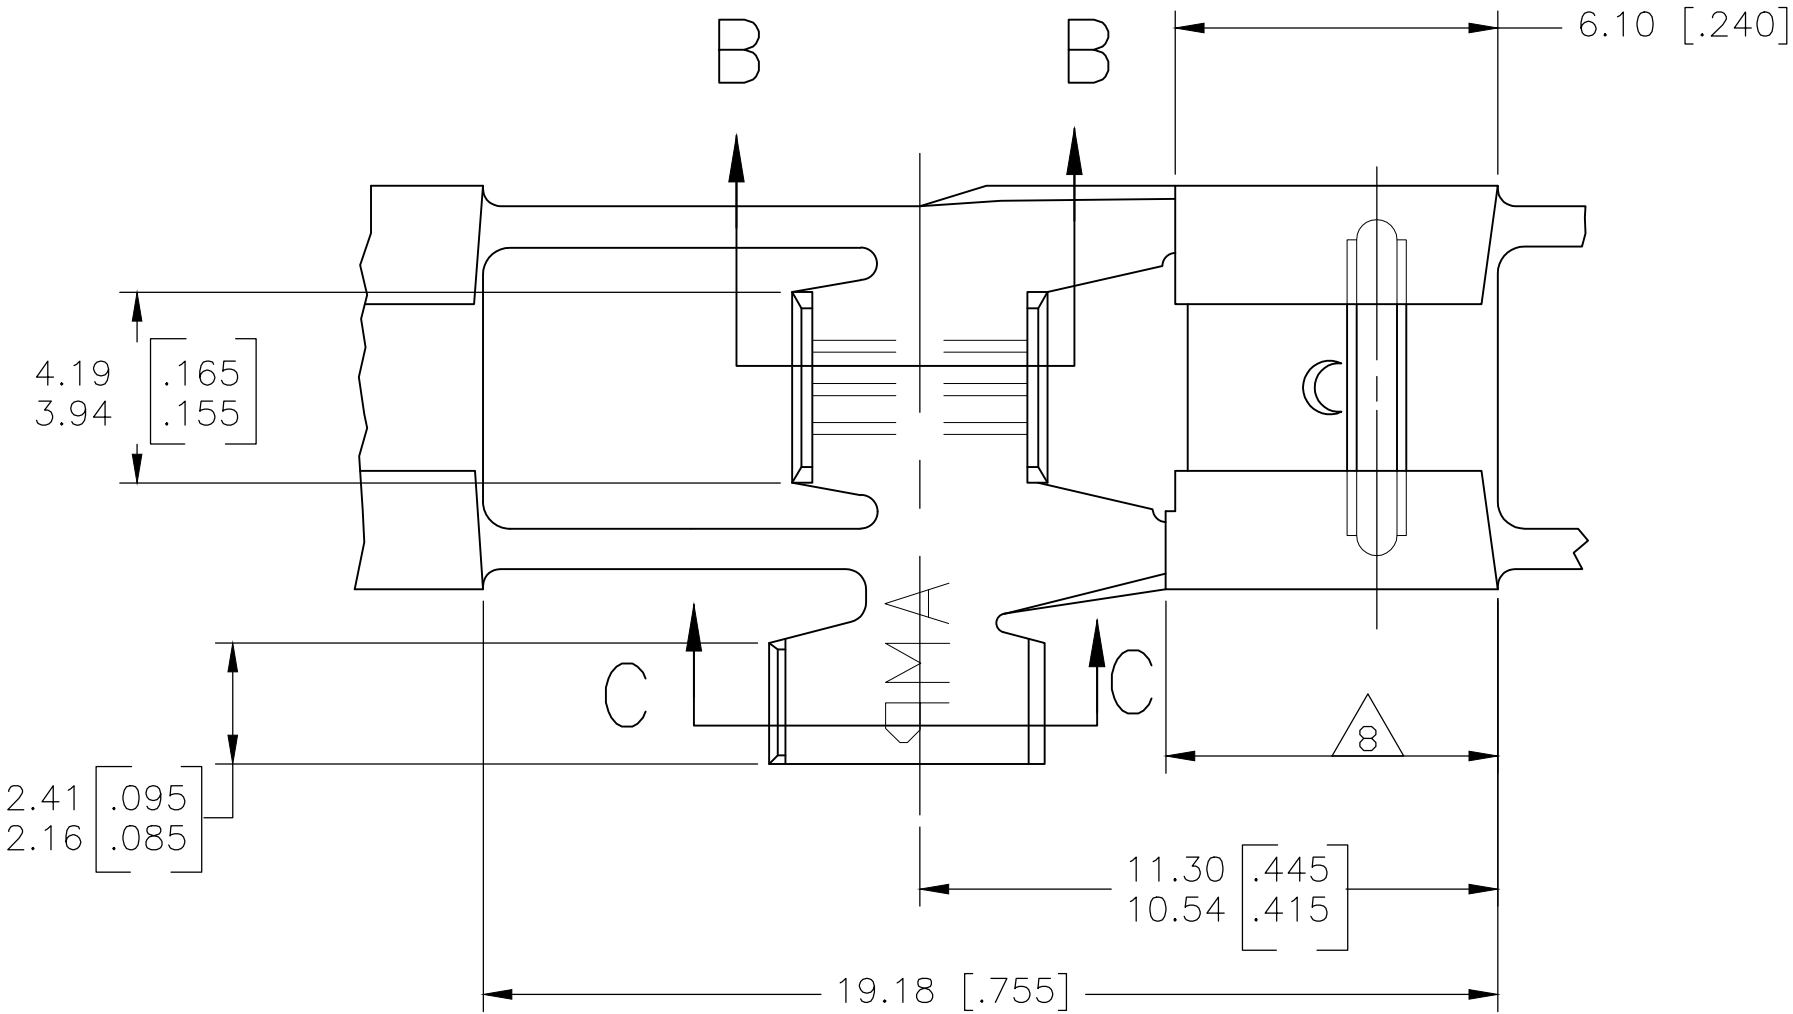


VIEW A-A

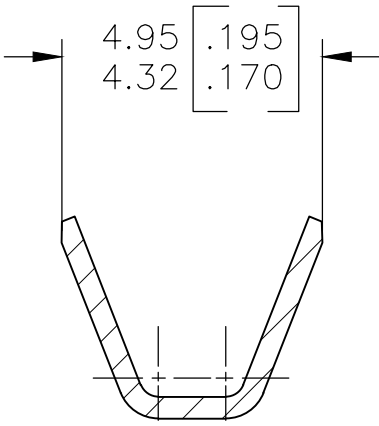

SECTION B-B

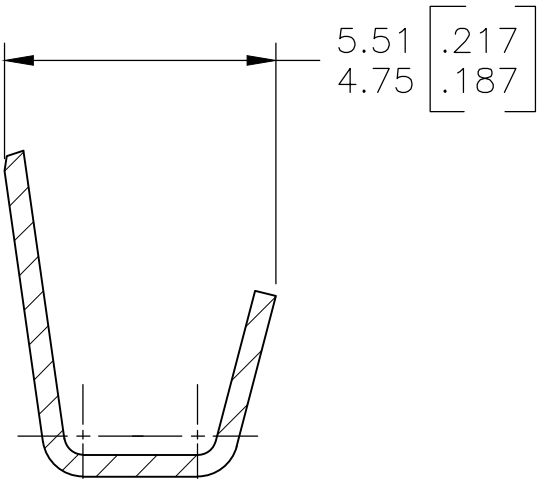

SECTION C-C

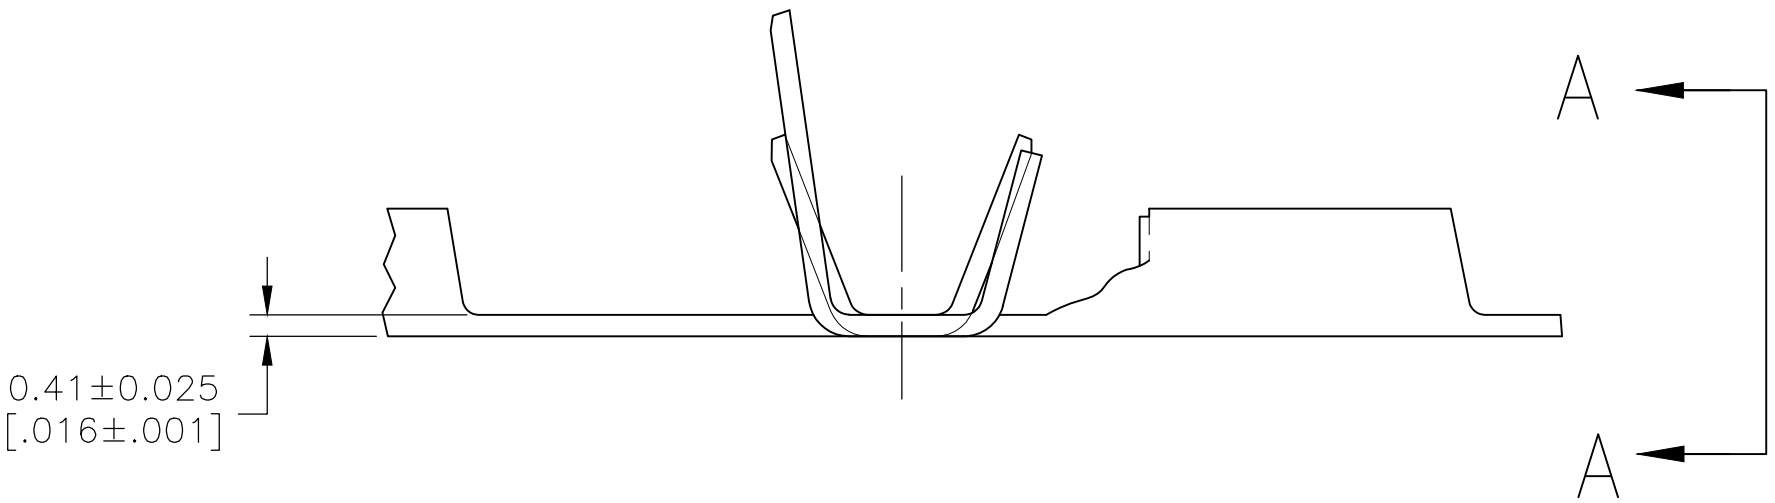

PART NO.	WIRE		INSULATION DIAMETER (MAX)	WIRE BARREL CRIMP				TENSILE STRENGTH POUNDS
	QTY	SIZE AWG		WIDTH	CRIMP HEIGHT	CRIMPER	ANVIL	
63314-1	1	14	.150	.120	.071	F	FLAT	50
	1	16			.063			30
	1	18			.057			20

5	OBSOLETE	7	SILVER	9	63314-5
	REVERSE REELED	6	TIN		63314-4
		6	TIN		63314-2
		6	-		63314-1
MATERIAL		FINISH		PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 6/16/87		 TE Connectivity				
		CHK MS FEHER 6/16/87						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE, FLAG, FASTON, 6.35 [.250] SERIES				
		APVD C MEYERS 6/16/87						
		PRODUCT SPEC —						
		APPLICATION SPEC —						
MATERIAL —		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT —		A2	00779	C=63314	—	
		CUSTOMER DRAWING				SCALE	SHEET	REV
						7:1	1 of 1	J1