
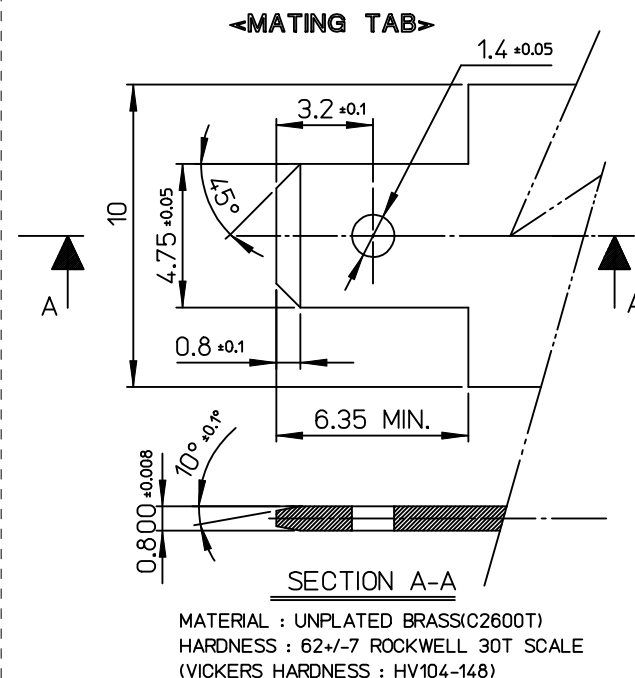


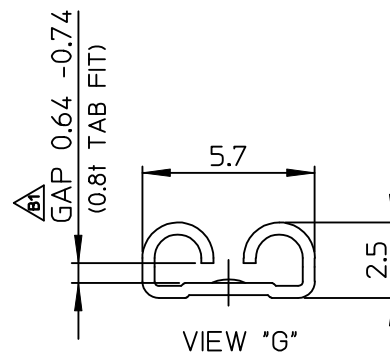

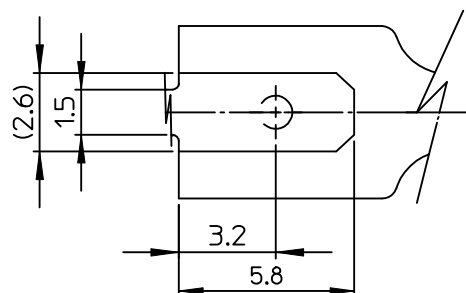
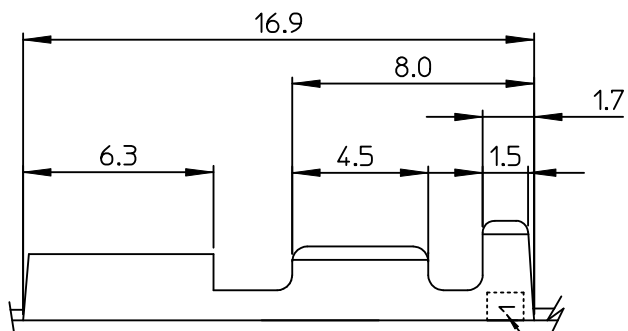


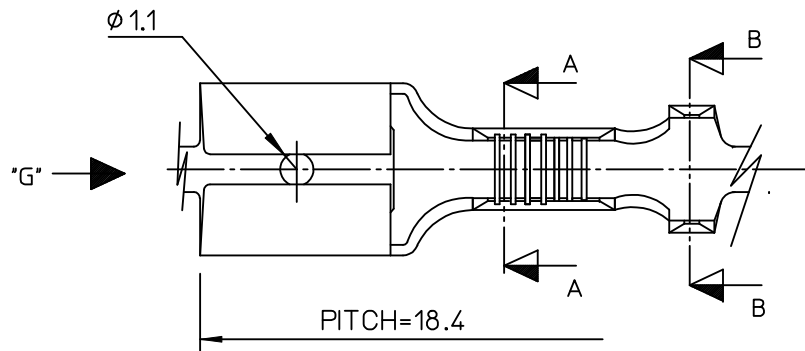

NOTES:

1. MATERIALS: PHOSPHOR BRONZE, 1/2 HARD, 0.4mm THICKNESS
2. FINISHES: POST TIN PLATED
(1.0 μ m MIN. TIN OVER 0.3 μ m MIN. COPPER)
3. PRODUCT SPECIFICATION: PS-49749-001
4. PACKAGING SPECIFICATION: PK-49749-001
5. APPLICABLE MAGNET WIRE RANGE: AWG #25.5 - #19(280 - 1300 CMA)
6. INSULATION WIRE RANGE: TFS-19 ~ 21 TEFLON TUBING
PER THE FOLLING CS-49749-001
7. TEST TAB INSERTION & WITHDRAWAL FORCE
(MEASURED BY PUSH-PULL GAUGE: USED 0.8t UNPLATED TAB)

INSERTION FORCE	WITHDRAWAL FORCE	FINISH
INITIAL	INITIAL	
7.0 kgf MAX.	2.7kgf MIN.	TIN PLATED

REVISED	EC NO: KOR2014-0002	2013/07/09	2013/07/09	2013/07/17
	DRWN:SKCH0	CHKD:SKCHU	APPR:YSKIM02	
B1	DESCRIPTION			
REV				



GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.30	± ---
1 PLACE	± 0.30	± ---
0 PLACE	± ---	± ---

ANGULAR ± 1 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
JB. JIN	2004/03/16
CHECKED BY	DATE
WY. YANG	2004/03/16
APPROVED BY	DATE
CW. LEE	2004/03/16
MATERIAL NO.	
497499001	
SIZE	
A3	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
6/1	METRIC	
.187 REC TERMINAL (MAGNET WIRE)		
molex		
DOCUMENT NO.		SHEET NO.
SD-49749-001		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		