


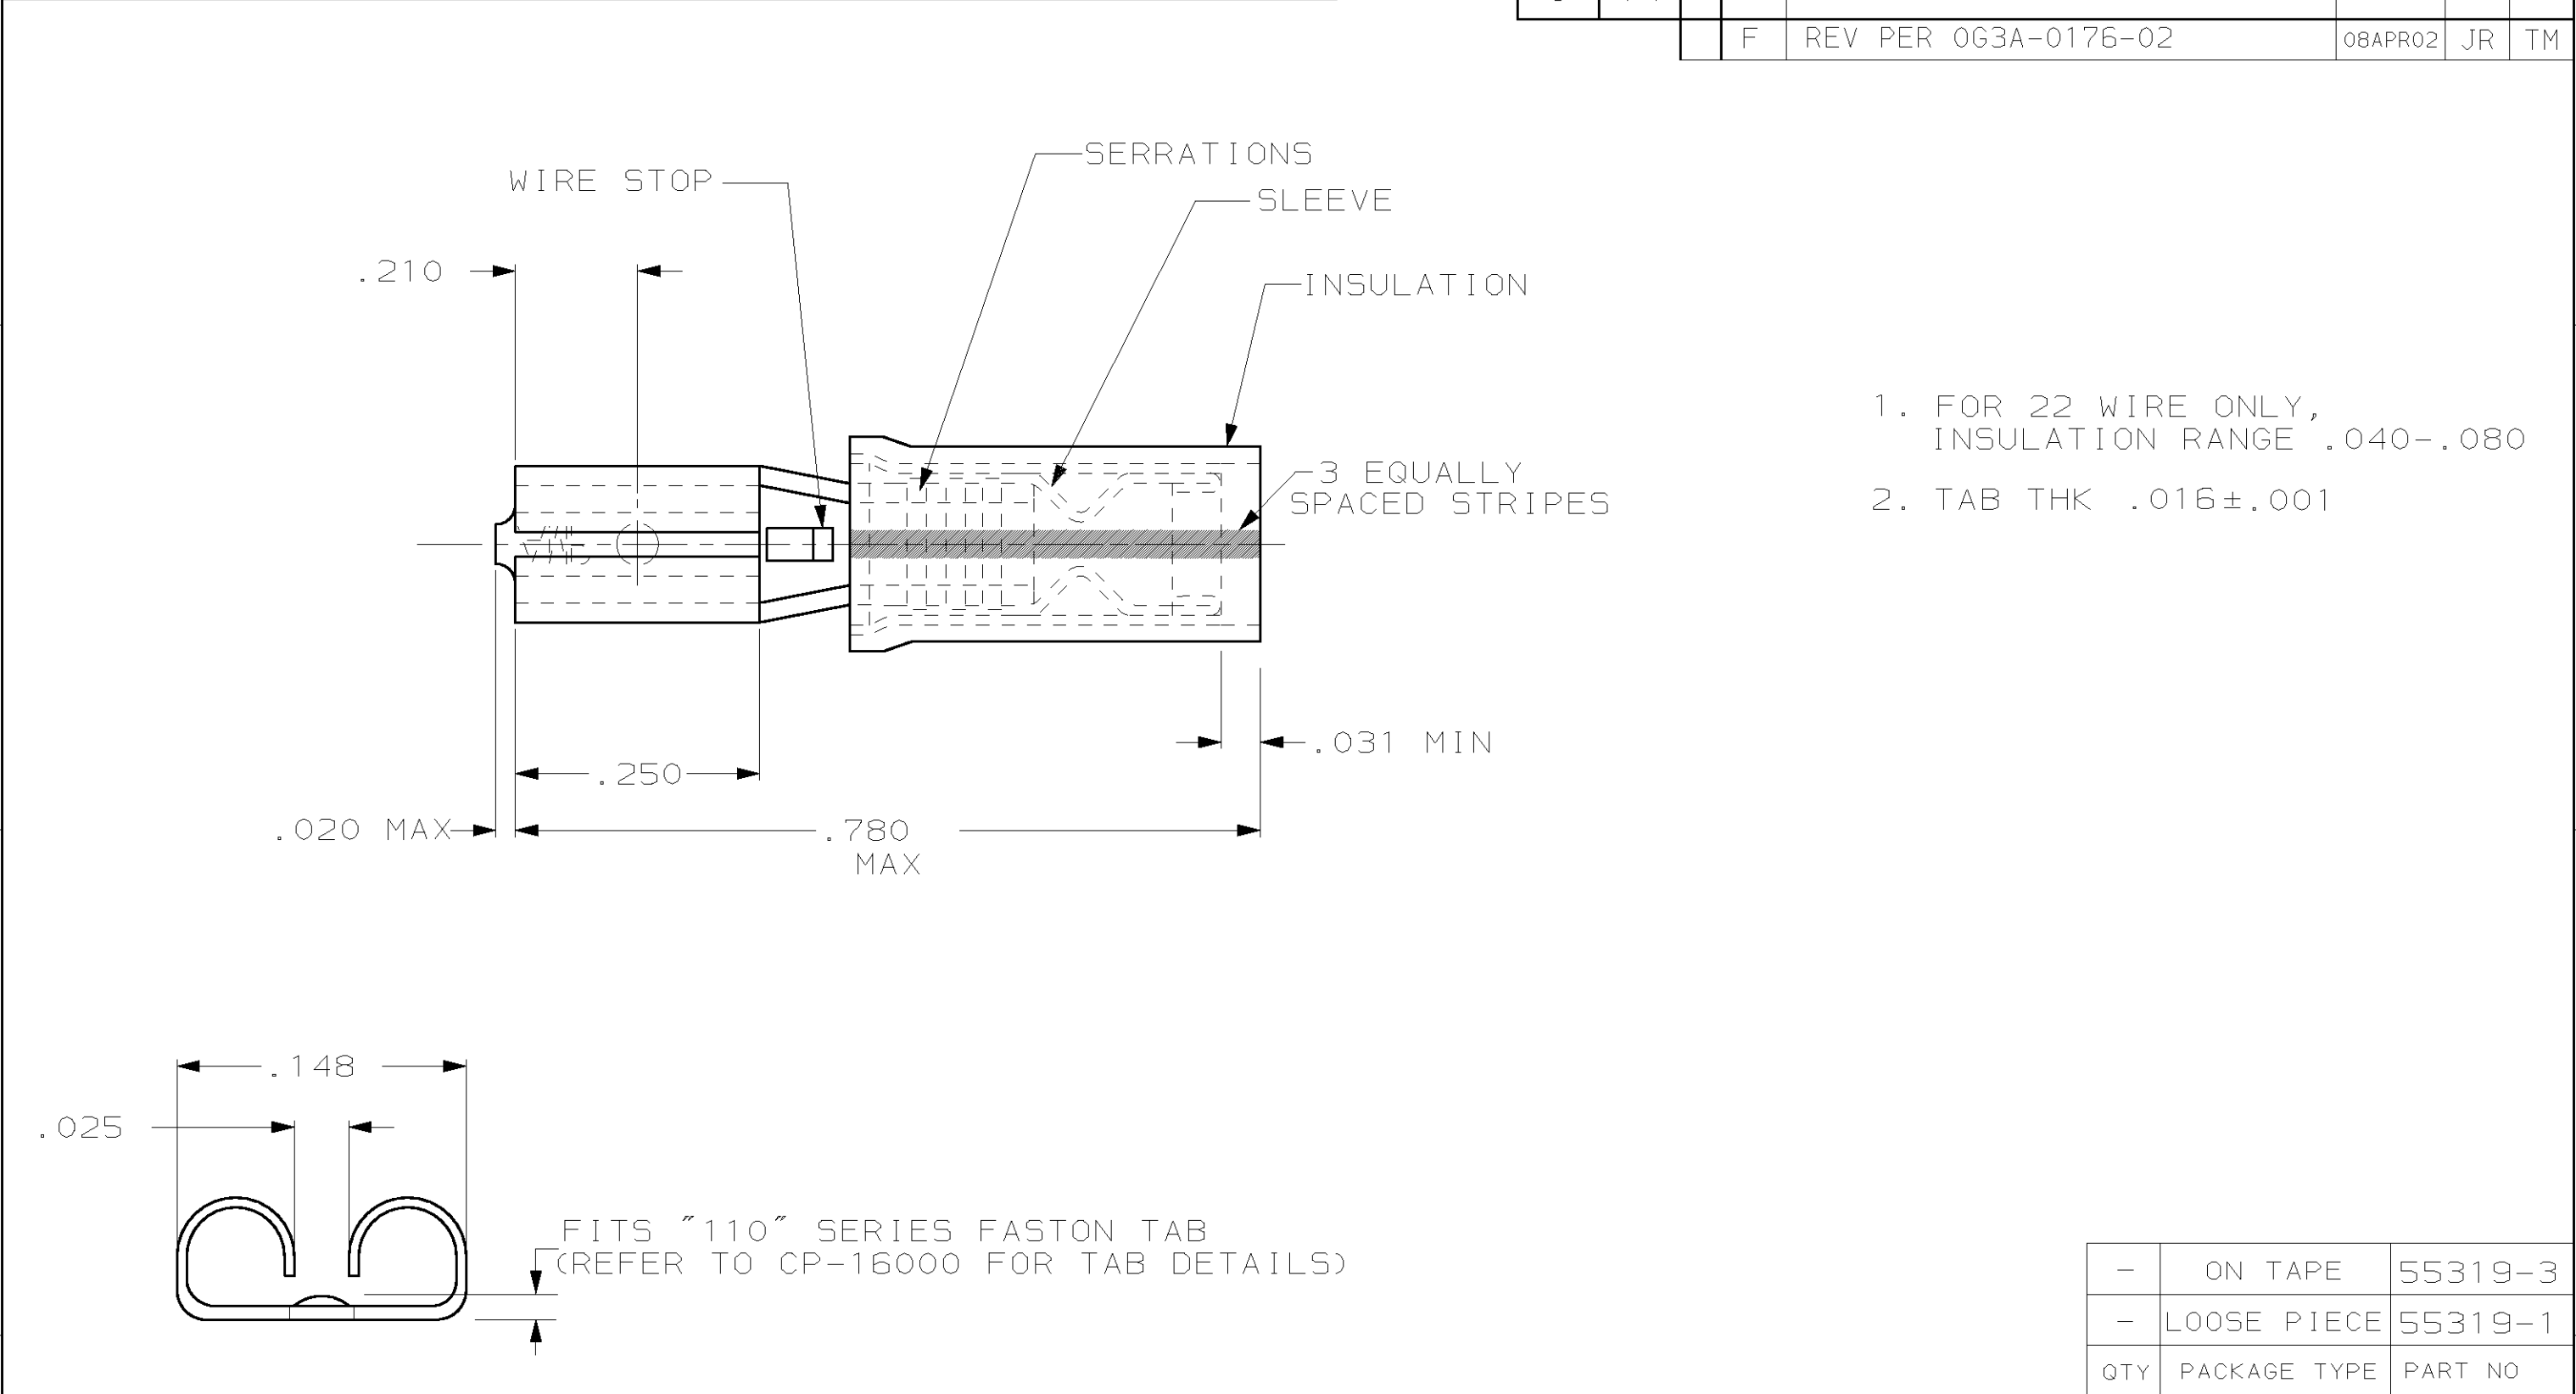

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN L OLMEDA	AMP Incorporated				
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER	VOLTAGE RATING: - -	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 15NOV95	AMP Harrisburg, PA 17105-3608				
	1-800-522-6752			0 PLC ±- 1 PLC ±- 2 PLC ±.015 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD B BARE 15NOV95	NAME RECEPTACLE, 110 SERIES, FASTON™, IR, PIDG™, WIRE SIZE, 22 AWG				
	TOOLING ASSISTANCE CENTER			MATERIAL BODY, BRASS .012 INSUL, NYLON, COLOR, RED WITH GREEN STRIPE	FINISH BODY, PRE-TIN -	PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-55319	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: -			CUSTOMER DRAWING			SCALE NT5	SHEET 1 OF 1	REV F
FOR ORDER ENTRY	1-800-526-5142									