

NUMBER C-280357

OBSOLETE


ADATTO PER APPLIC. STANDARD (FOR STANDARD APPLICATOR)		ADATTO PER MINI APPLICATOR (FOR MINI APPLICATOR)		
N°. PART. (PART NUMBER)	MATERIALE/FINITURA (MATERIAL/FINISH)	N°. PART. (PART NUMBER)	MATERIALE/FINITURA (MATERIAL/FINISH)	
~~280357-1~~	~~BRONZO FOSFOROSO (PHOSPH. BRONZE)~~	~~280428-1~~	~~BRONZO FOSFOROSO (PHOSPH. BRONZE)~~	OBSOLETE
~~280357-2~~	~~BRONZO FOSF. STAGNATO (TIN PL. PH. BR.)~~	280428-2	BRONZO FOSF. STAGNATO (TIN PL. PH. BR.)	
~~280357-3~~	OTTONE (BRASS)	~~280428-3~~	~~OTTONE (BRASS)~~	OBSOLETE
~~280357-4~~	~~OTTONE STAGNATO (TIN PL. BRASS)~~	280428-4	OTTONE STAGNATO (TIN PL. BRASS)	
—·—·—	—·—·—	~~280428-4~~	OTTONE STAGNATO (TIN PL. BRASS)	OBSOLETE

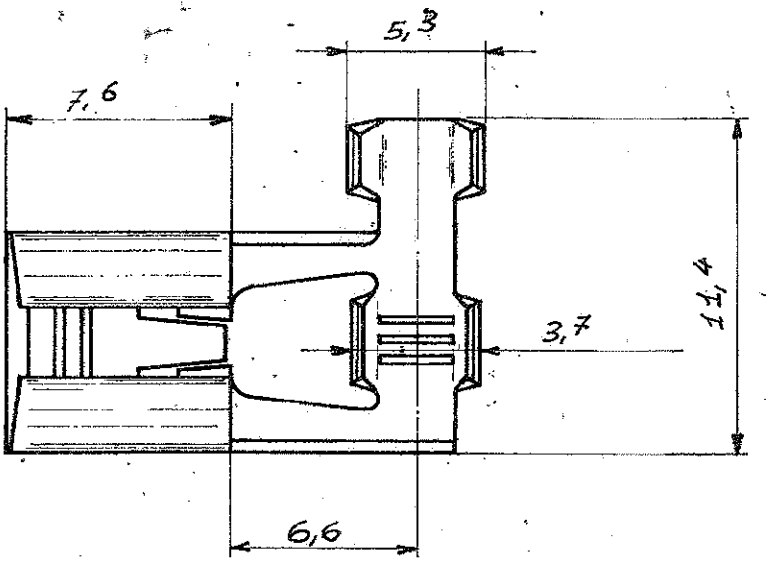

Adatto per linguetta di sp. 0,8
(TO FIT 0,8 mm TAB THK)

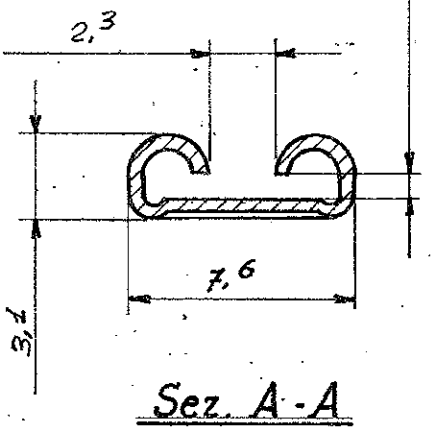

Sez. A-A

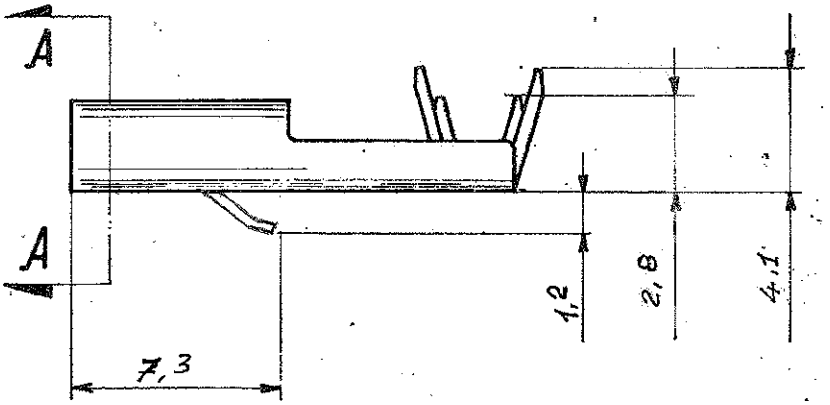

DIMENSIONS IN mm. DO NOT SCALE PRINT

PRINT DIST

LTR	REVISION RECORD	DR	CHK	DATE
N2	REVISED PER ECR-17-013054	BDA	TD	22NOV2017

DR 9-1-73 DES 18/12/74

CHK 18/12/74 APP

© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

MATERIAL AND FINISH
VEDERE TABELLA
(SEE TABLE)

TE Connectivity

CLASS .250 SERIES

WIRE RANGE - - INSULATION
0,5 ÷ 1,5 mm² | 3,3 Ø MAX

TYPE F. F.

TOLERANCE EXCEPT AS NOTED ± 0,4

SCALE 4:1

LOC I A

NO C-280357

REV N2

NAME
.250 SERIES FLAG FASTIN-ON REC.