
© 2020 TE Connectivity. All Rights Reserved.

SUGGESTED MATING TAB

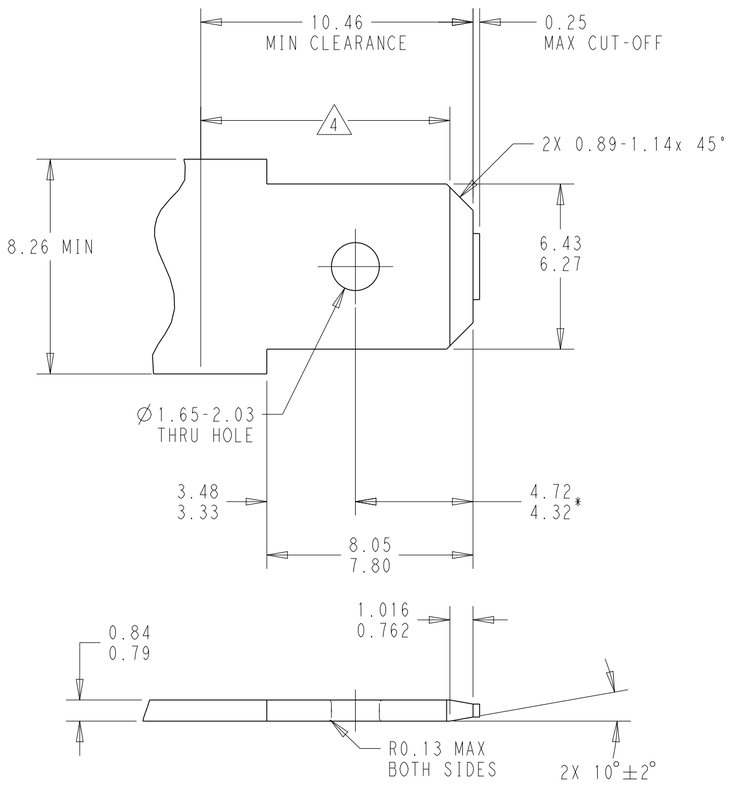

1. MATERIAL: 1/2 HARD BRASS OR NICKEL PLATED STEEL
2. NO BURRS PERMISSIBLE AROUND HOLE
3. TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERATURE IS OVER 225°F

△4 MUST BE FLAT WITHIN 0.08 OVER THIS LENGTH

5. HOLE MUST BE SYMMETRICAL ABOUT TAB ℄ WITHIN 0.08.

* TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	4	NOTE 3 UPDATED	10NOV2020	BKW	KR
	A	REVISED PER ECN-21-112112	09AUG2021	BDA	KR
	A1	REVISED PER ECN-22-173509	07SEP2022	TDB	KR
	B	REVISED PER ECN-23-193388	12JAN2023	TDB	KR


1. CONTINUOUS STRIP ON REELS, BREAKS MAY BE PRESENT


△2 THIS DIMENSION MUST BE MAINTAINED FOR PROPER FUNCTION OF THE LATCHING MECHANISM.


3. WIRE RANGE:
(2) 14 AWG STRANDED / (2) 3.50 INSULATION DIAMETER DOUBLE WIRE
(1) 16 AWG + (1) 14 AWG STRANDED / (1) 3.11 + (1) 3.50 INSULATION DIAMETER DOUBLE WIRE
(1) 18 AWG + (1) 14 AWG STRANDED / (1) 2.80 + (1) 3.50 INSULATION DIAMETER DOUBLE WIRE

△4 THIS TERMINAL MUST BE USED WITH A TIN PLATED TAB

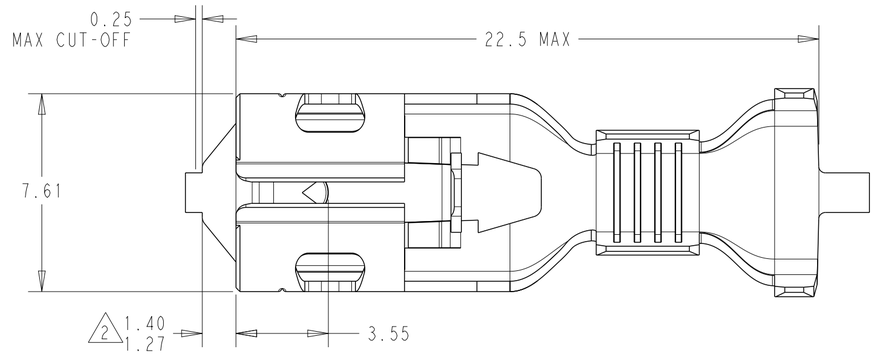


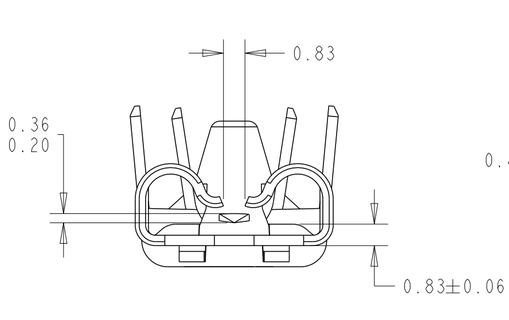

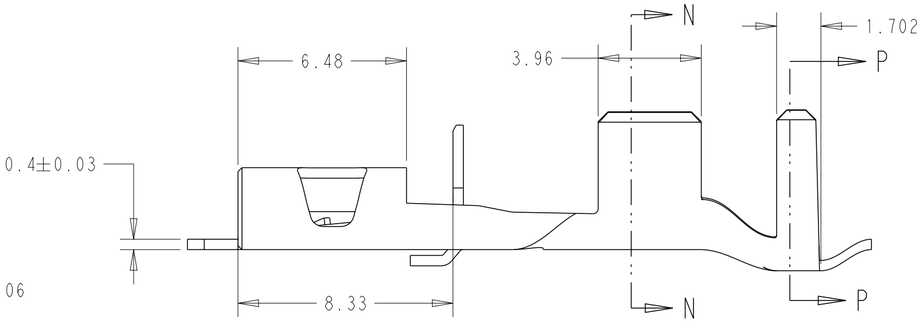

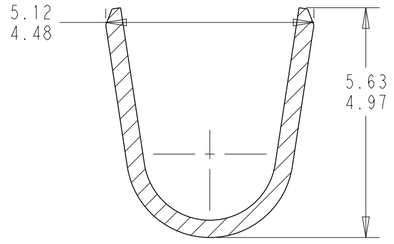

SECTION N-N
SCALE 10:1

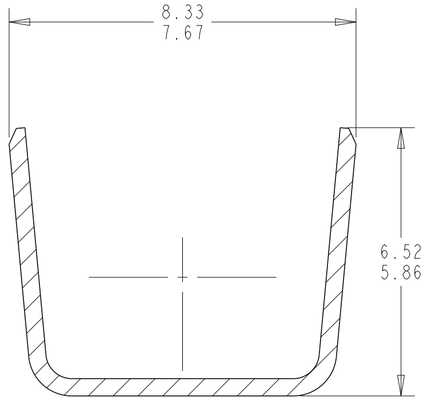

SECTION P-P
SCALE 10:1

UNPLATED △4	BRASS	2238285-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN B. WEAVER 05JUN2020
CHK K. RANDOLPH 05JUN2020
APVD W. MOYER 05JUN2020
PRODUCT SPEC -
APPLICATION SPEC 114-2074
WEIGHT -

TE Connectivity

NAME RECEPTACLE, POSITIVE-LOCK 250 SERIES -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2238285	-

CUSTOMER DRAWING | SCALE 6:1 | SHEET 1 OF 1 | REV B