

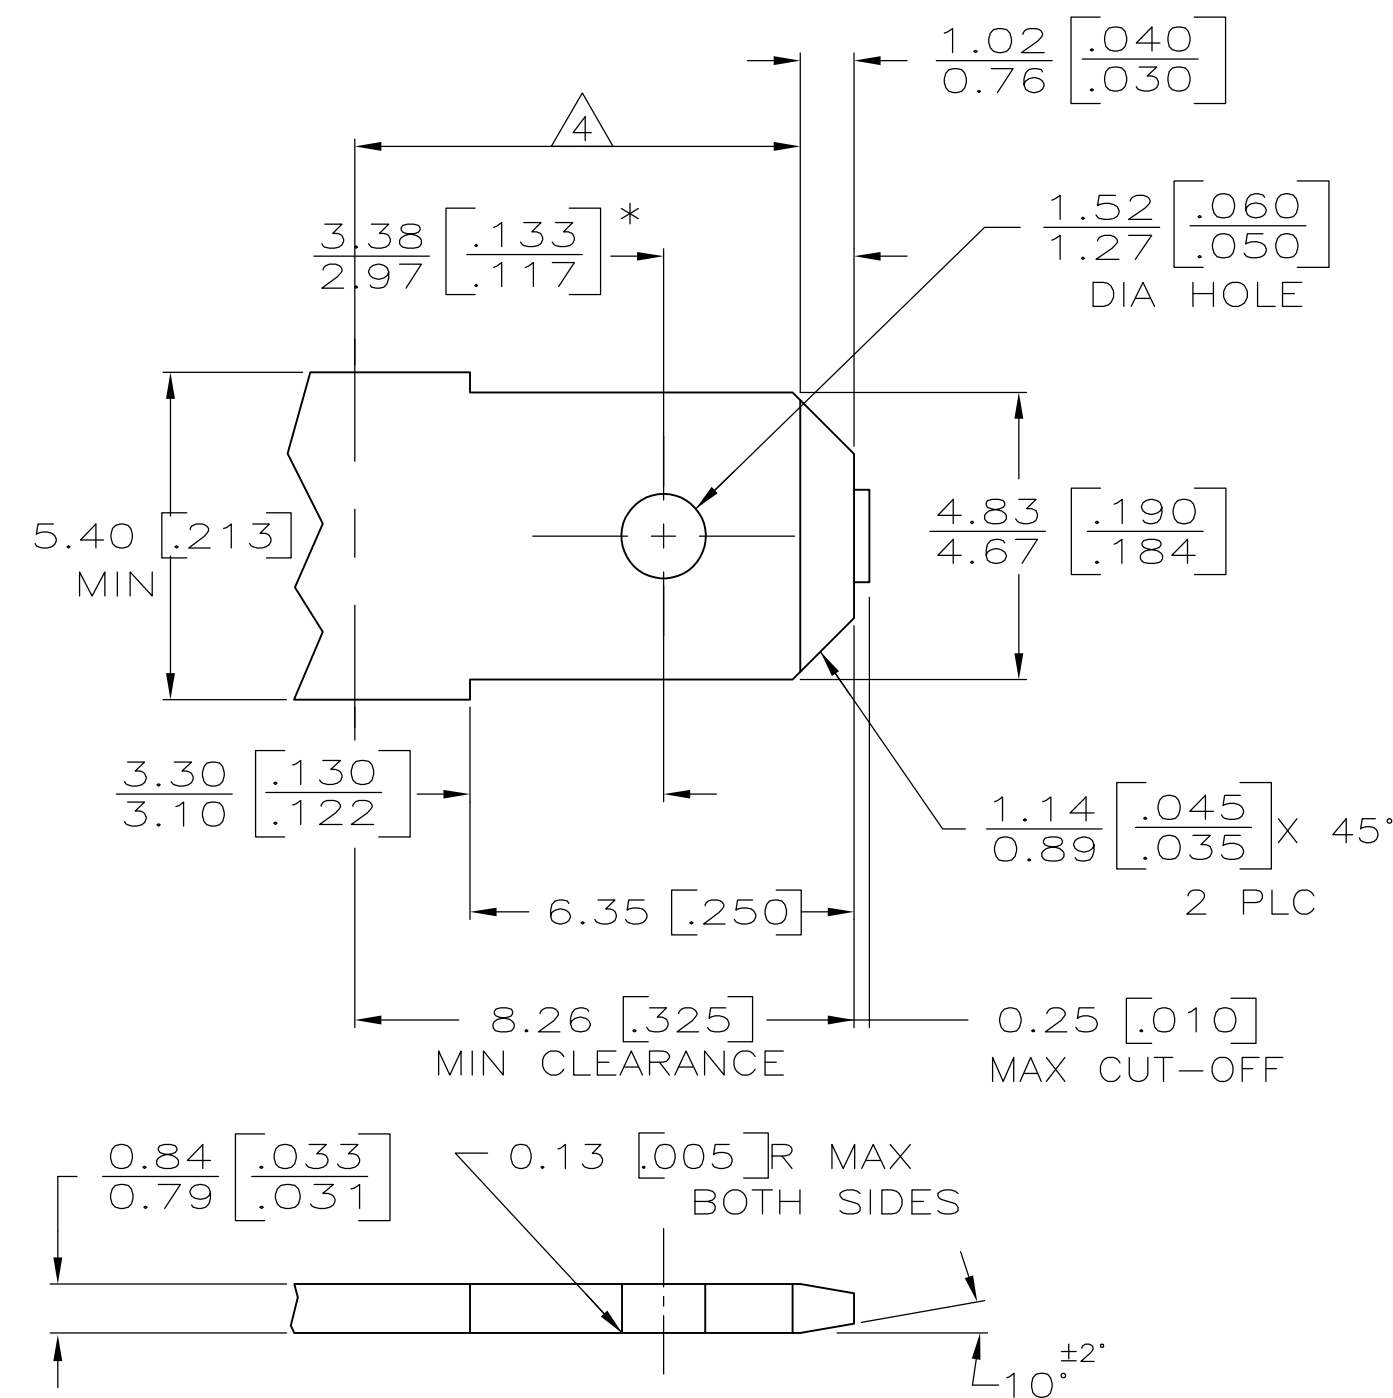




SUGGESTED MATING TAB

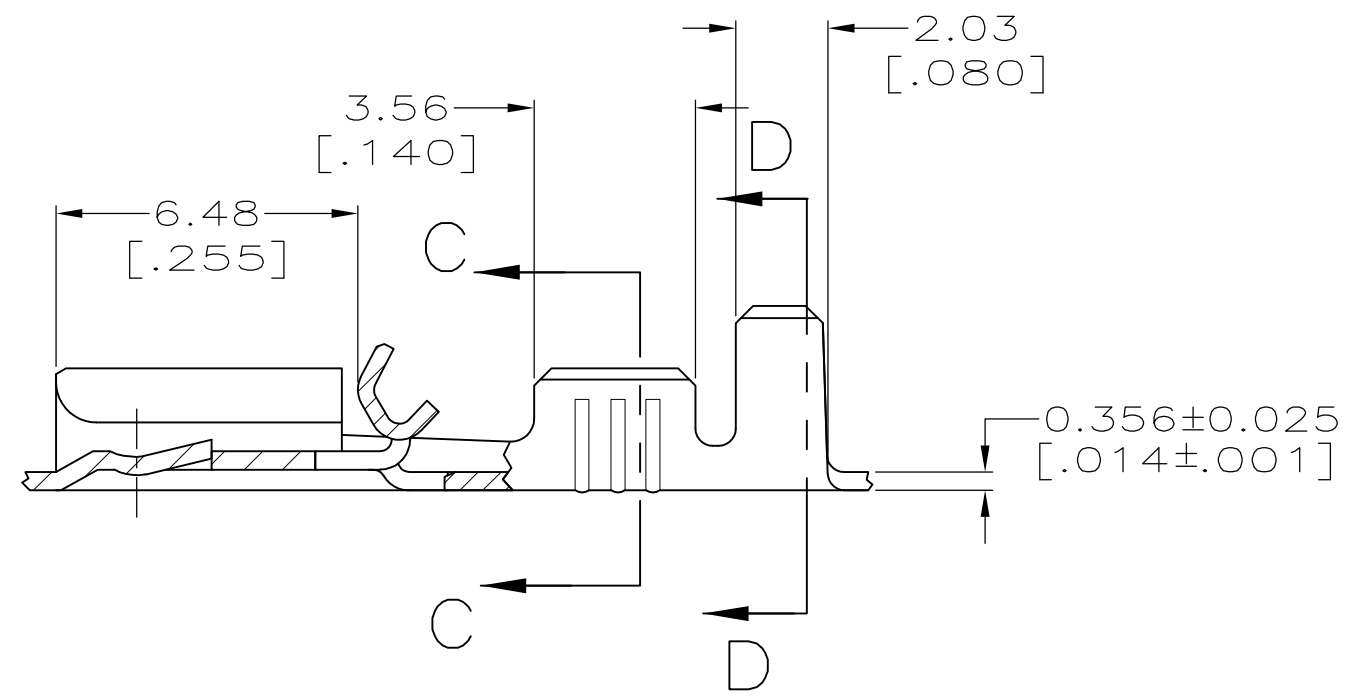

- 1 MATL: #2 HARD BRASS OR NICKEL PLATE STEEL.
- 2 NO BURRS PERMISSIBLE AT HOLE.
- 3 TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERATURE IS OVER 225°F
- 4 MUST BE FLAT WITHIN 0.076 [0.003] OVER THIS LENGTH.
- 5 HOLE MUST BE SYMMETRICAL ABOUT TAB ϕ WITHIN 0.076 [0.003].
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

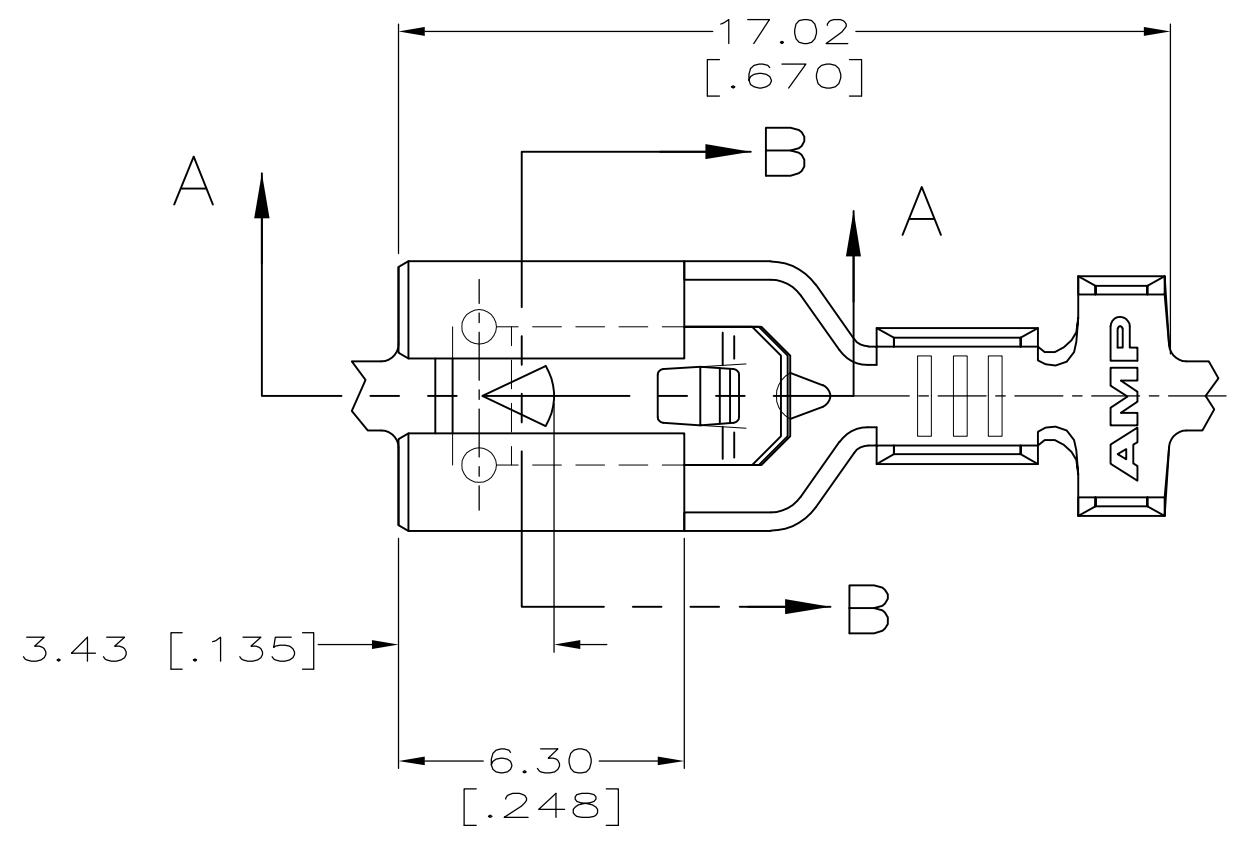


SECTION A-A

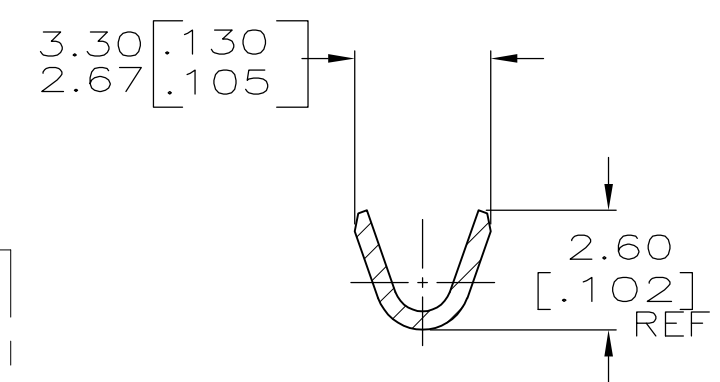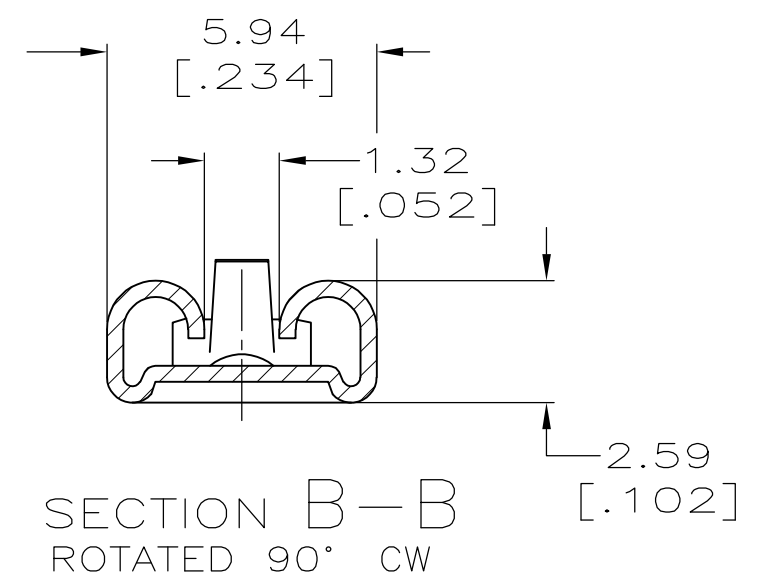

SECTION C-C

This specification lists various figures which indicate the direction a product comes off the top of the reel.

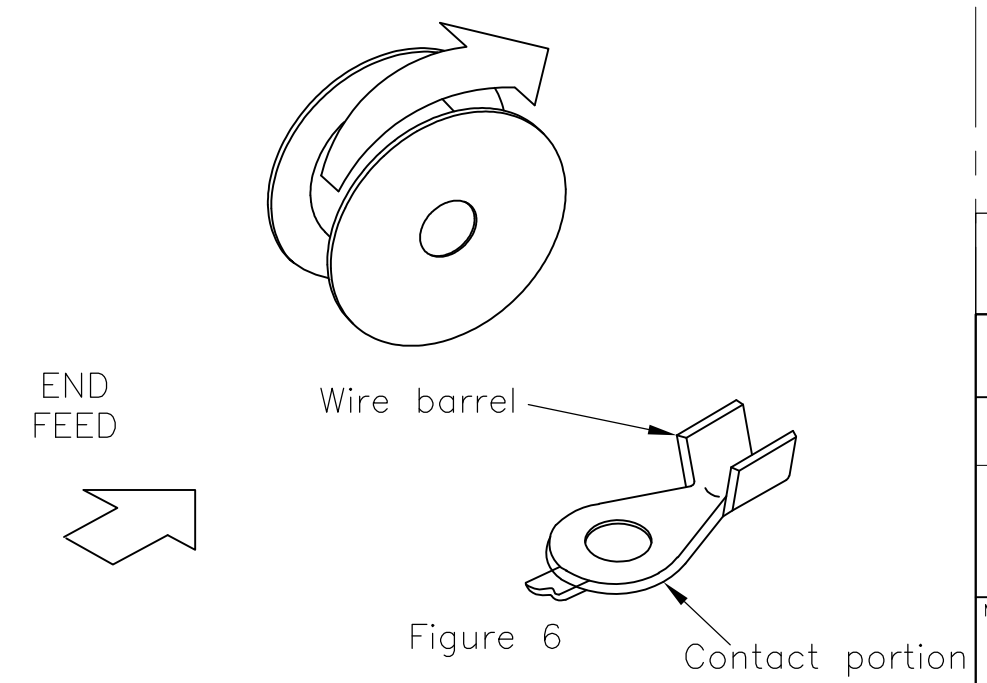

- 1 CONTINUOUS STRIP ON REELS.
- 2 ACCEPTS #22-#18 SINGLE WIRE SIZES, WIRE CRIMP IS 2.03 [0.080], F TYPE.
- 3 FITS INSULATION RANGE 2.29-3.30 [0.090-0.130] DIA, INSULATION CRIMP IS 3.94 [0.155] F TYPE.

REELING		TIN		1217097-2	
107-3 FIG.6		OBSOLETE		-1217097-1-	
THIS DRAWING IS A CONTROLLED DOCUMENT.		FINISH		PART NO.	
DWN JR RUTH 6/26/98		TE Connectivity		RECEPTACLE, POSITIVE-LOCK, MARK III, 4.75 [0.187] SERIES	
CHK MS FEHER 6/26/98		NAME		-	
APVD E HOWARD 6/26/98		SIZE		A2	
PRODUCT SPEC		CAGE CODE		00779	
APPLICATION SPEC		DRAWING NO		C=1217097	
MATERIAL BRASS		WEIGHT		0	
FINISH SEE TABLE		SCALE		6:1	
CUSTOMER DRAWING		SHEET		1 OF 1	
		REV		F1	