
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	TAB SIZE INCH [mm]	DIMENSIONS in. [mm]	
			L± .03 [0,8]	W± .01 [0,3]
ED10-250M	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	.72 [18,3]	.25 [6,3]

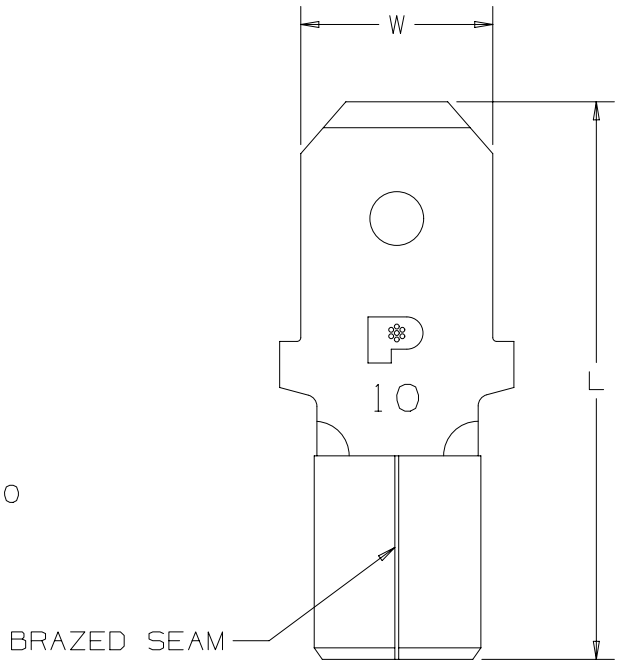

NOTES:

1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 302°F [150°C] MAX OPERATING TEMPERATURE
   C. 2000V MAX VOLTAGE

2. MATERIAL:
   A. STAMPING: .032" (.81) THICK NICKEL PLATED COPPER

3. INSTALLATION TOOLS: CT-100A, CT-200, CT-260, CT-570, CT-1570

4. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]

5. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

STRONGHOLD MALE DISCONNECT (250 SERIES) NON-INSULATED, BRAZED SEAM #12-10 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123SHW/00

DATASET FILE NAME: 00123SHW/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41546

DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	2/18	TMR	NTS	A

SHT 1 OF 1

D10100DA/20