


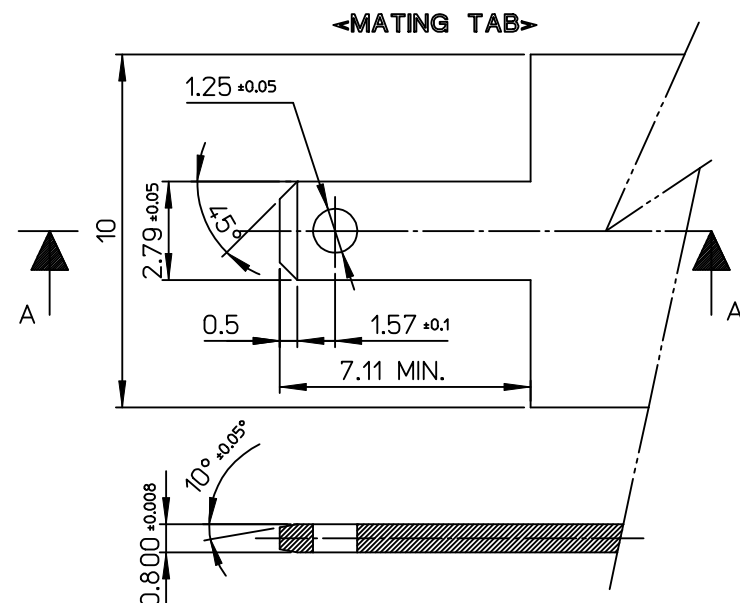


SECTION A-A

MATERIAL : UNPLATED BRASS(C2600T)
HARDNESS : 62+/-7 ROCKWELL 30T SCALE
(VICKERS HARDNESS : HV104-148)

NOTES:


1. MATERIALS: PHOSPHOR BRONZE, 1/2 HARD, 0.3mm THICKNESS
2. FINISHES: POST TIN PLATED
(1.0 μ m MIN. TIN OVER 0.3 μ m MIN. COPPER)
3. PRODUCT SPECIFICATION: PS-49748-001
4. PACKAGING SPECIFICATION: PK-49748-001
5. APPLICABLE MAGNET WIRE RANGE : AWG #25.5 - #19(280 - 1300 CMA)
6. INSULATION WIRE RANGE : TFS-19 ~ 21 TEFLON TUBING
PER THE FOLLING CS-49748-001
7. TEST TAB INSERTION & WITHDRAWAL FORCE
(MEASURED BY PUSH-PULL GAUGE : USED 0.8t UNPLATED TAB)

INSERTION FORCE(Kgf)	WITHDRAWAL FORCE(Kgf)	FINISH
INITIAL	INITIAL	
5.5kgf MAX.	2.5kgf MIN.	TIN PLATED


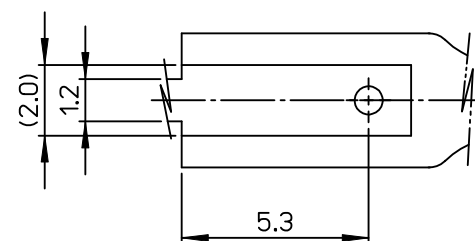


TRADE MARK
(MK1)

SECTION A-A



SECTION B-B



REV	DESCRIPTION	QUALITY SYMBOLS
B1	REVISED EC NO: KOR2014-0002 DRWN:SKCHO 2013/07/09 CHKD:SHCHU 2013/07/09 APPR:YSKIM02 2013/07/17	▼ = 0 ▽_C = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± .---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.30	± ---
1 PLACE	± 0.30	± ---
0 PLACE	± ---	± ---
ANGULAR ± 1°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY		SCALE 7/1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
DRAWN BY JB. JIN	DATE 2004/03/16	TITLE .110 REC TERMINAL (MAGNET WIRE)		
CHECKED BY WY. YANG	DATE 2004/03/16			
APPROVED BY CW. LEE	DATE 2004/03/16			
MATERIAL NO. 497489001				

SIZE
A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION