



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.2 – .51 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.3 mm[.012 in]
Product Length	16.51 mm[.65 in]
Compatible Insulation Diameter Range	1.02 – 1.78 mm[.04 – .07 in]
Wire Size	.2 – .51 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Agency/Standard	UL
-----------------	----

Packaging Features

Packaging Quantity	20000
Packaging Method	Strip/Reel

Other

Line	Premier
Terminals & Splices Comment	UL listed and CSA Certified for 22-20 AWG.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 2150072-1 OCEAN_2.0_Applicator-E-055F080F	 TE Part # 2-2150072-1 OCEAN_2.0_Applicator-E-055F080F	 TE Part # 2-2150072-2 OCEAN_2.0_Applicator-E-055F080F	 TE Part # 2150072-2 OCEAN_2.0_Applicator-E-055F080F
 TE Part # 2232974-1 187 FASTON,REC.,24-20 AWG,BR	 TE Part # 7-2150072-1 OCEAN_2.0_Applicator-E-055F080F	 TE Part # 7-2150072-2 OCEAN_2.0_Applicator-E-055F080F	 TE Part # 7-2150072-7 OCEAN_2.0_SPARE_PART_KIT-055F080F

Also in the Series | FASTON 187

 Crimp Terminal Housings(42)	 Insertion & Extraction Tools(1)	 Joints & Splices(1)	 PCB Terminals(42)
---------------------------------	-------------------------------------	-------------------------	-----------------------



[Quick Disconnects\(209\)](#)



[Splices\(1\)](#)

Customers Also Bought



TE Part #5-2232265-4
[PTL 1X4 PLUG HSG GLW WIRE KEY A DGR](#)



TE Part #928344-3
[3P STD TIMER GEH](#)



TE Part #61588-1
[RING 22-16 AWG TPBR](#)




TE Part #60196-1
[187 FASTON REC 20-16 AWG BR](#)



TE Part #42799-1
[187 FASTON REC 20-16 AWG BR](#)



TE Part #2238199-3
[FASTON 187 STD REC STR 18-14TPBR](#)

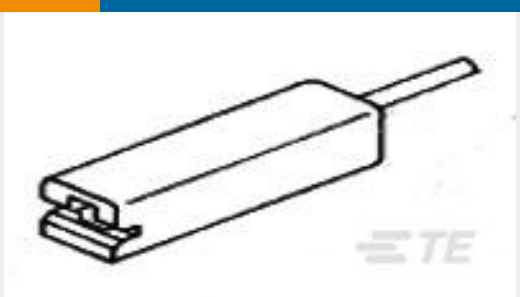

TE Part #925387-2
[110 FASTON HSG. REC. 1P CLEAR](#)



TE Part #3-964951-2
[STD TIMER GEH 2P](#)



TE Part #2238207-3
[187 FASTON,REC.,20-16 AWG,TPBR](#)



TE Part #3-1241961-7
[STD TIM MK2 HSG 3P](#)

Documents

Product Drawings

[187 FASTON REC 24-20 AWG TPBR](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_62181-1_P.2d_dxf.zip](#)

English

[3D PDF](#)



3D

Customer View Model

[ENG_CVM_CVM_62181-1_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_62181-1_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

English

[Wire Preparation And Crimp Inspection Guide](#)

English

Product Environmental Compliance

[MD_62181-1_0207201808_dmtec](#)

English

[MD_62181-1_0207201808_dmtec](#)

English