


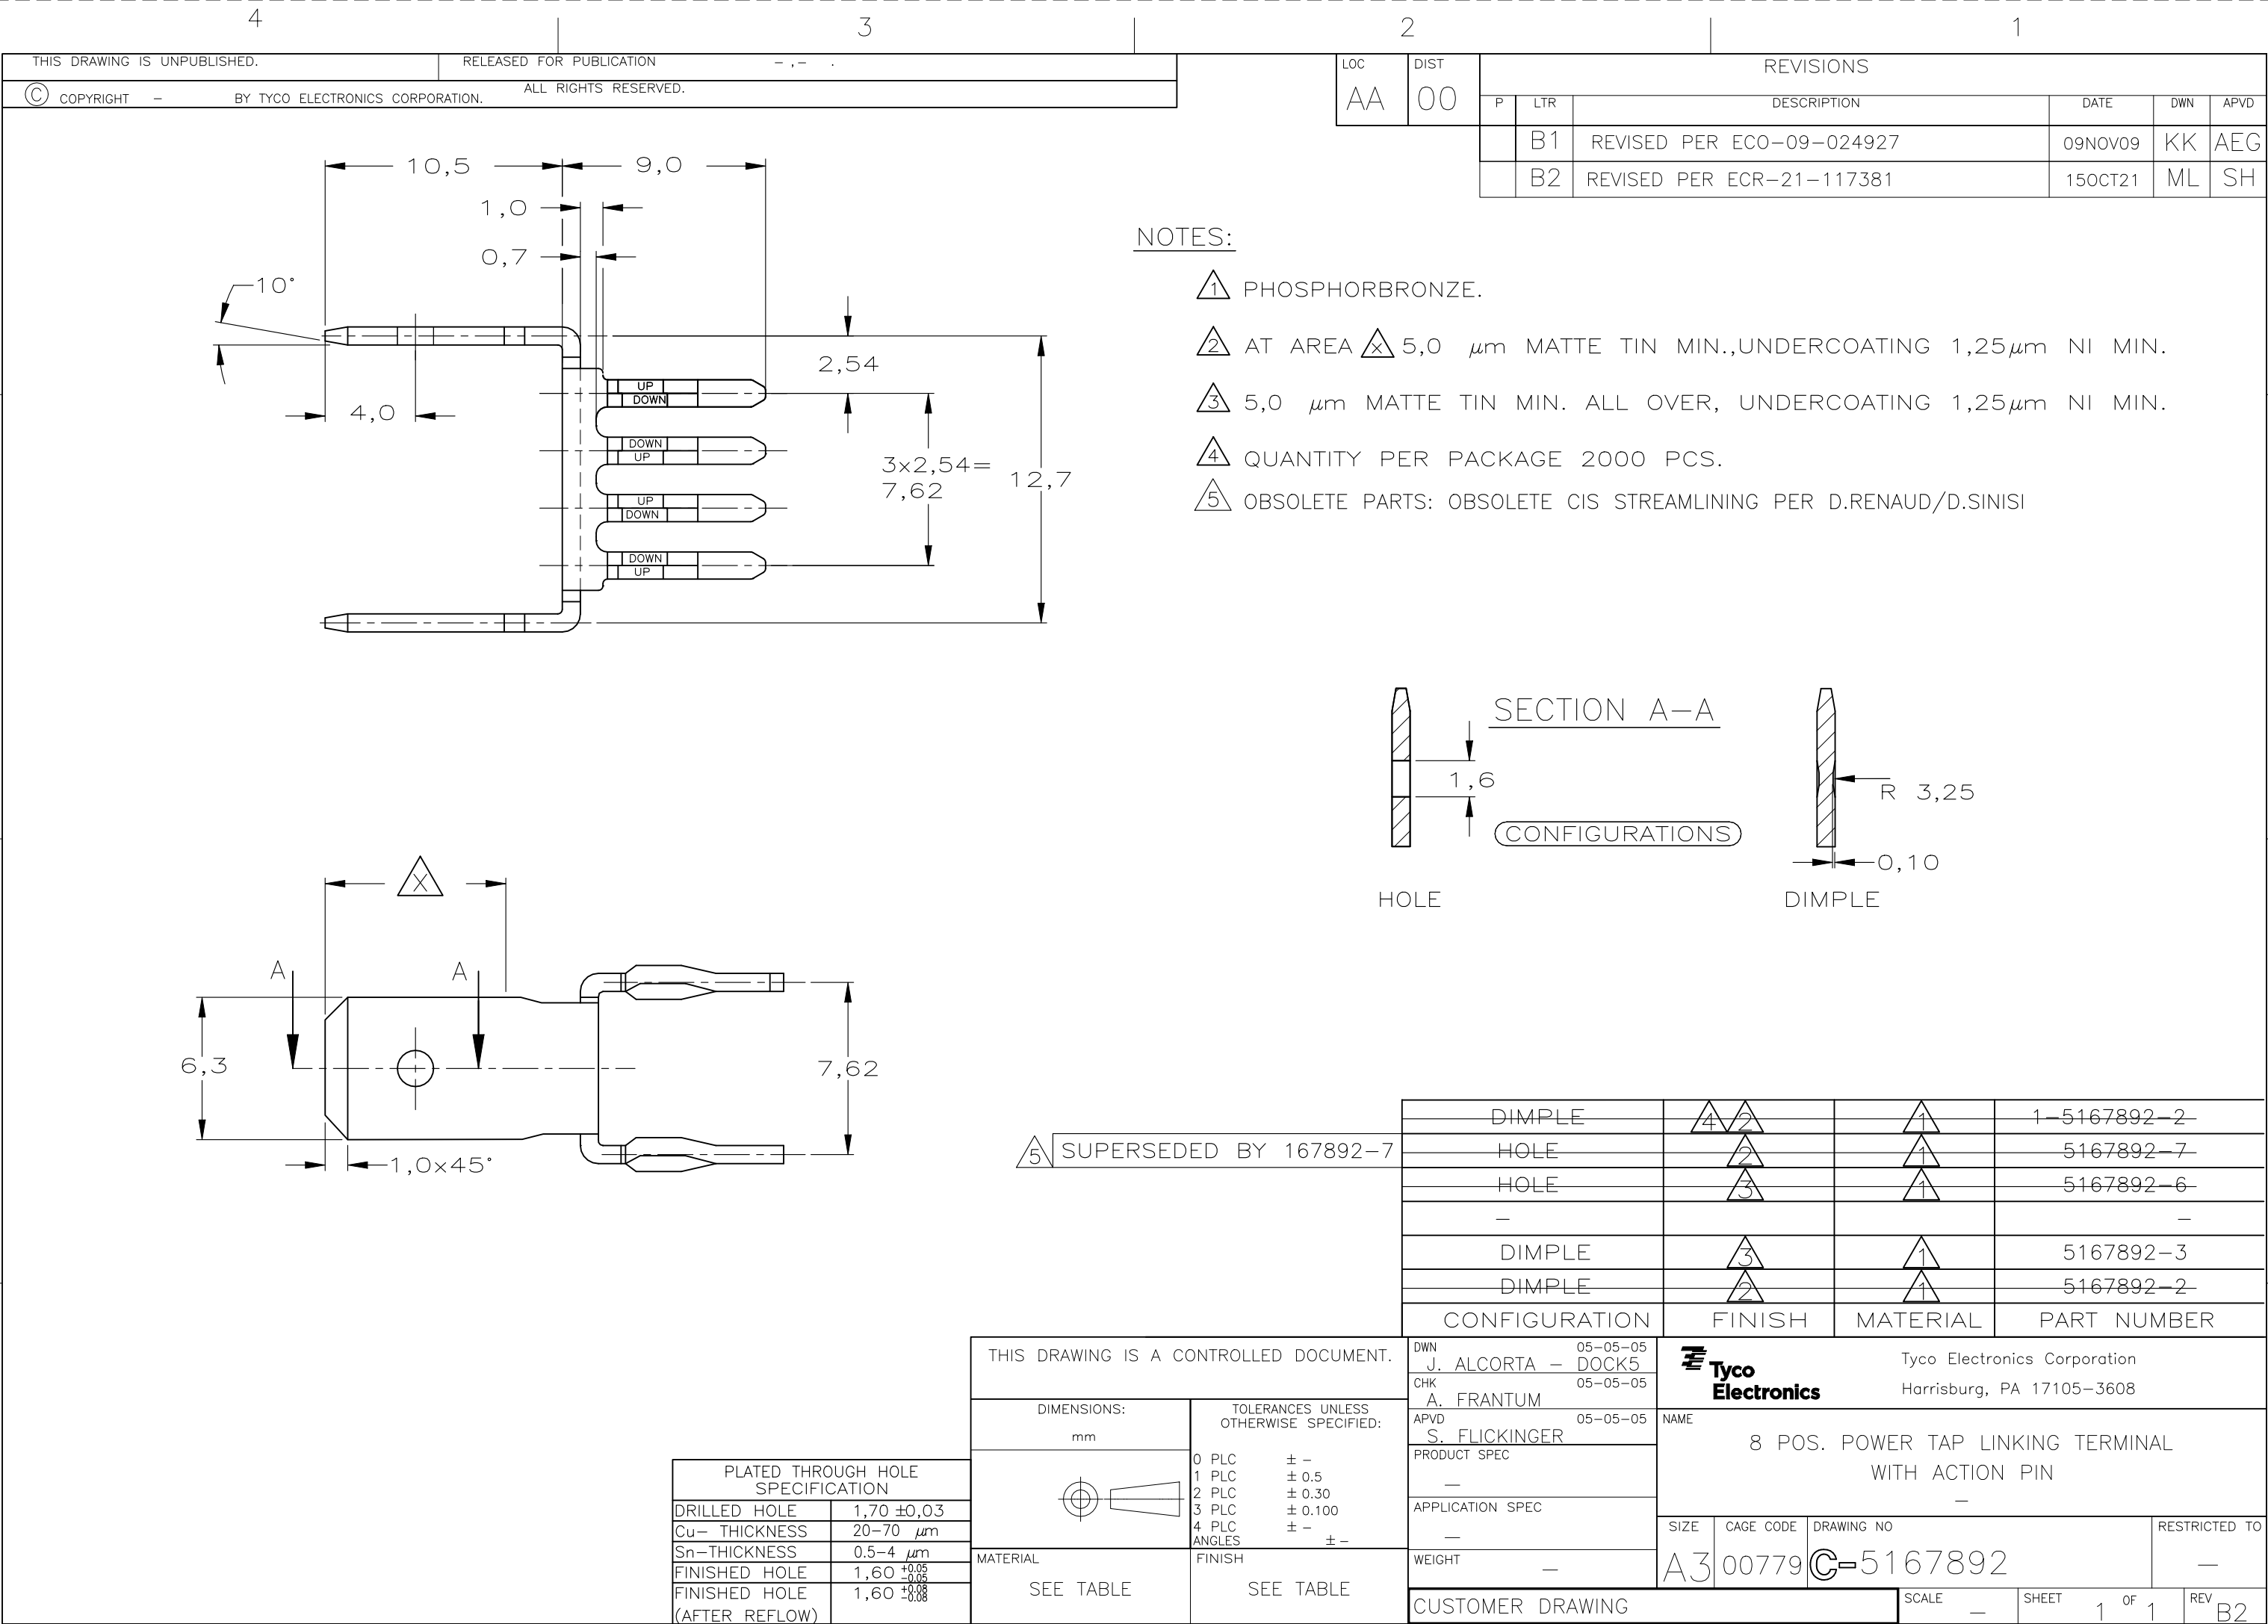

10,5

9,0

1,0

0,7

10°

4,0

2,54

3x2,54=7,62

12,7

UP

DOWN

DOWN

UP

UP

DOWN

DOWN

UP

6,3

7,62

1,0x45°

X

A

A

SECTION A-A

1,6

CONFIGURATIONS

HOLE

R 3,25

0,10

DIMPLE

5

SUPERSEDED BY 167892-7

CONFIGURATION	FINISH	MATERIAL	PART NUMBER
DIMPLE	4 2	1	1-5167892-2-
HOLE	2	1	5167892-7-
HOLE	3	1	5167892-6-
-			-
DIMPLE	3	1	5167892-3
DIMPLE	2	1	5167892-2-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

± -

± 0.5

± 0.30

± 0.100

± -

± -

SEE TABLE

PLATED THROUGH HOLE SPECIFICATION

DRILLED HOLE	1,70 ±0,03
Cu- THICKNESS	20-70 μm
Sn-THICKNESS	0.5-4 μm
FINISHED HOLE	1,60 $\pm_{-0.05}^{+0.05}$
FINISHED HOLE (AFTER REFLOW)	1,60 $\pm_{-0.08}^{+0.08}$

MATERIAL

SEE TABLE

DWN

J. ALCORTA -

05-05-05

DOCK5

CHK

A. FRANTUM

05-05-05

APVD

S. FLICKINGER

05-05-05

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

Tyco Electronics

Tyco Electronics Corporation

Harrisburg, PA 17105-3608

NAME

8 POS. POWER TAP LINKING TERMINAL

WITH ACTION PIN

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-5167892

-

SCALE

SHEET

OF

REV

-

1

1

B2

AMP 1470-19 REV 31MAR2000