



ISOMETRIC VIEW

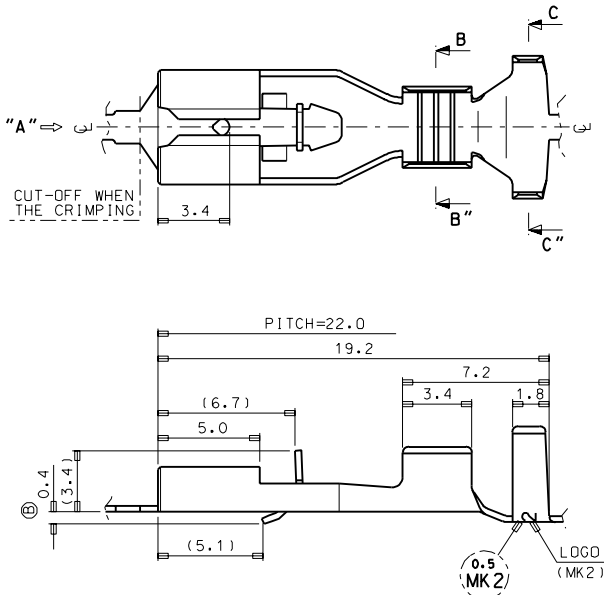


NOTES


1. MATERIAL : BRASS, 0.30mm THICKNESS
2. FINISH : PRE-PLATED TIN
3. MATING TAB THICKNESS : 0.50mm
4. RECOMMENDED LENGTH OF WIRE STRIP IS 4.4-5.0mm.
5. APPLICABLE WIRE : AWG #20+#20
AWG #20+#18
AWG #18+#18



VIEW "A"



SEC' : B-B"

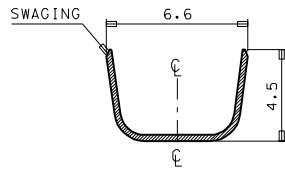

SEC' : C-C"

REVISED	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS TOLERANCED)		SCALE	DESIGN UNITS		THIRD ANGLE PROJECTION	☐ INCH	☐ INCH	☒ MM	REVISE ON
					6/1	☒ MM		☐ INCH				CAD ONLY
					DRAWN BY & DATE			TITLE:				
					J.S.KANG 97/12/02			.187 MP-LOCK TM'(L) (.05+ TAB FIT)				
C	REV	MAJOR CRITICAL	mm		INCH			MOLEX INCORPORATED KOREA				
			4 PLACES ±0.2 ±		CHECKED BY & DATE							
			3 PLACES ±0.2 ±		B.K. CHO							
			2 PLACES ±0.2 ±		APPROVED BY & DATE							
1 PLACE ±0.3 ±		C.W.LEE		CAD FILENAME		MATERIAL NO.	DRAWING NO.	SHEET NO.				
		ANGULAR: ± 1°		s35068d.dgn		35068-9902	SD-35068-9902	1 of 1				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.							SIZE	
											B	