
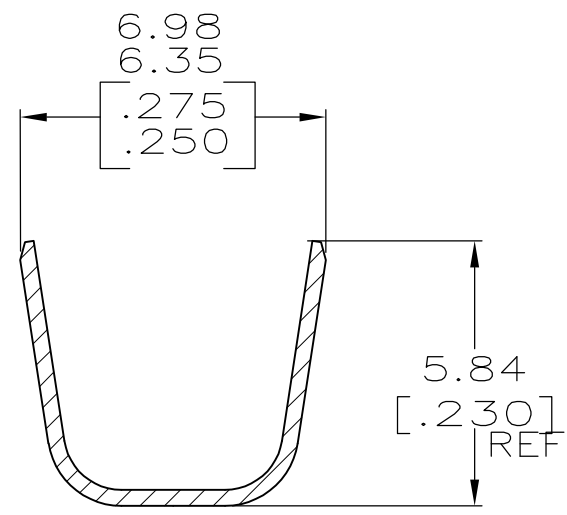
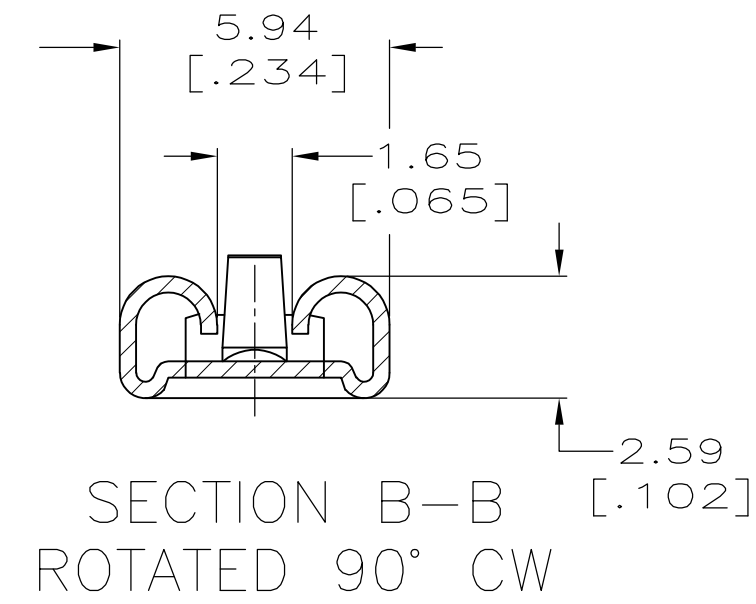
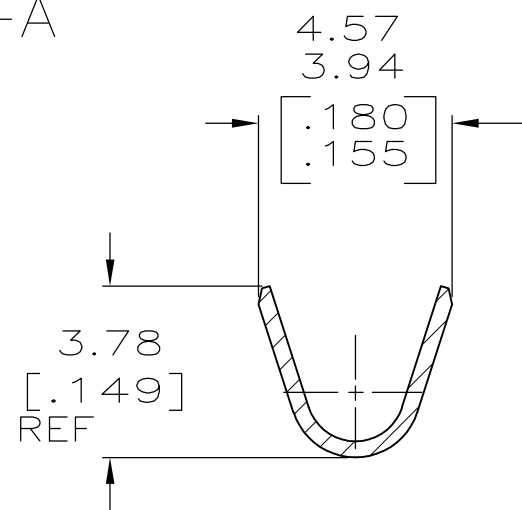
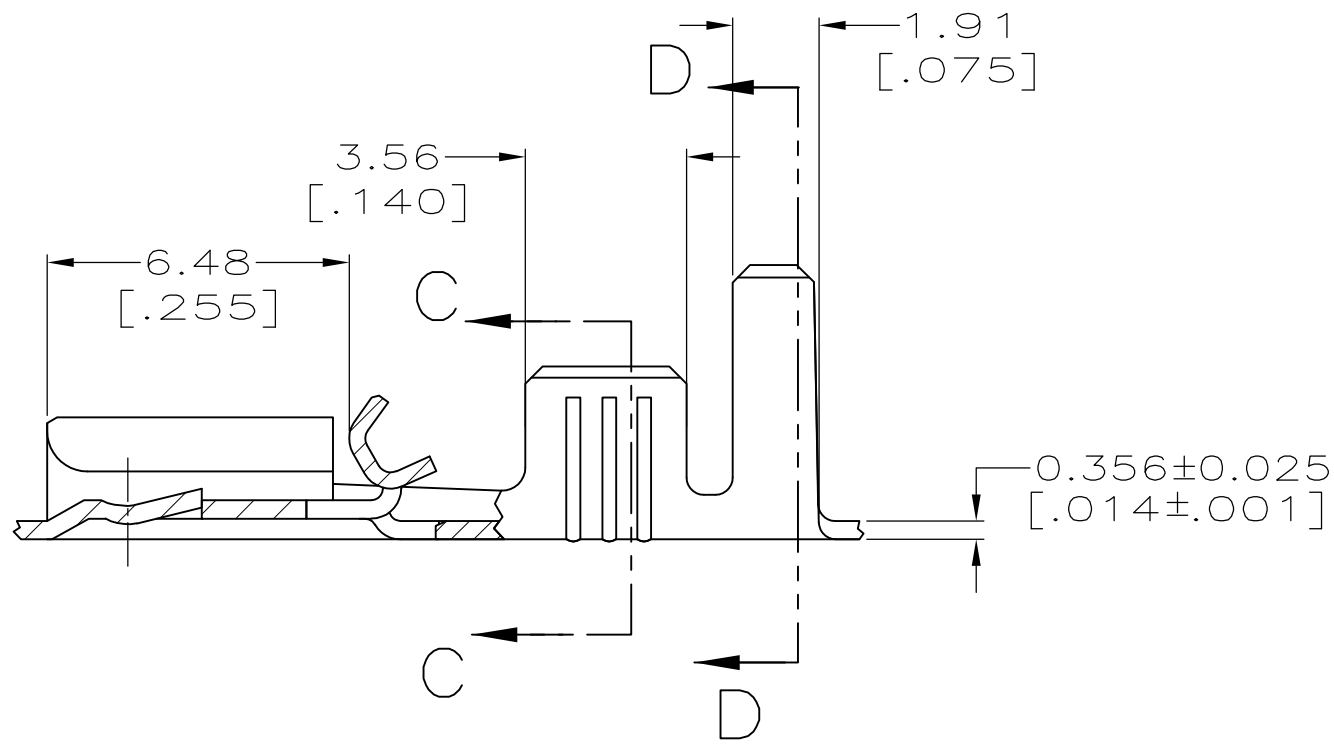
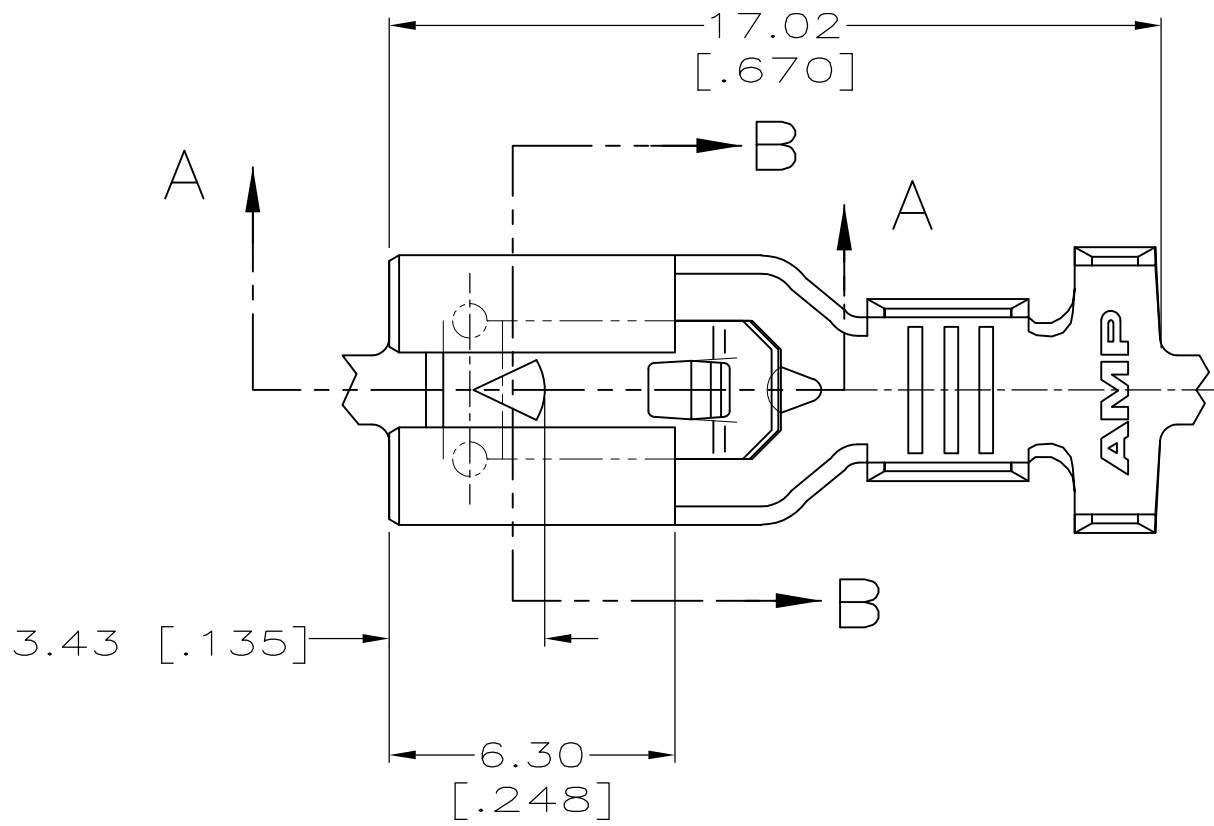


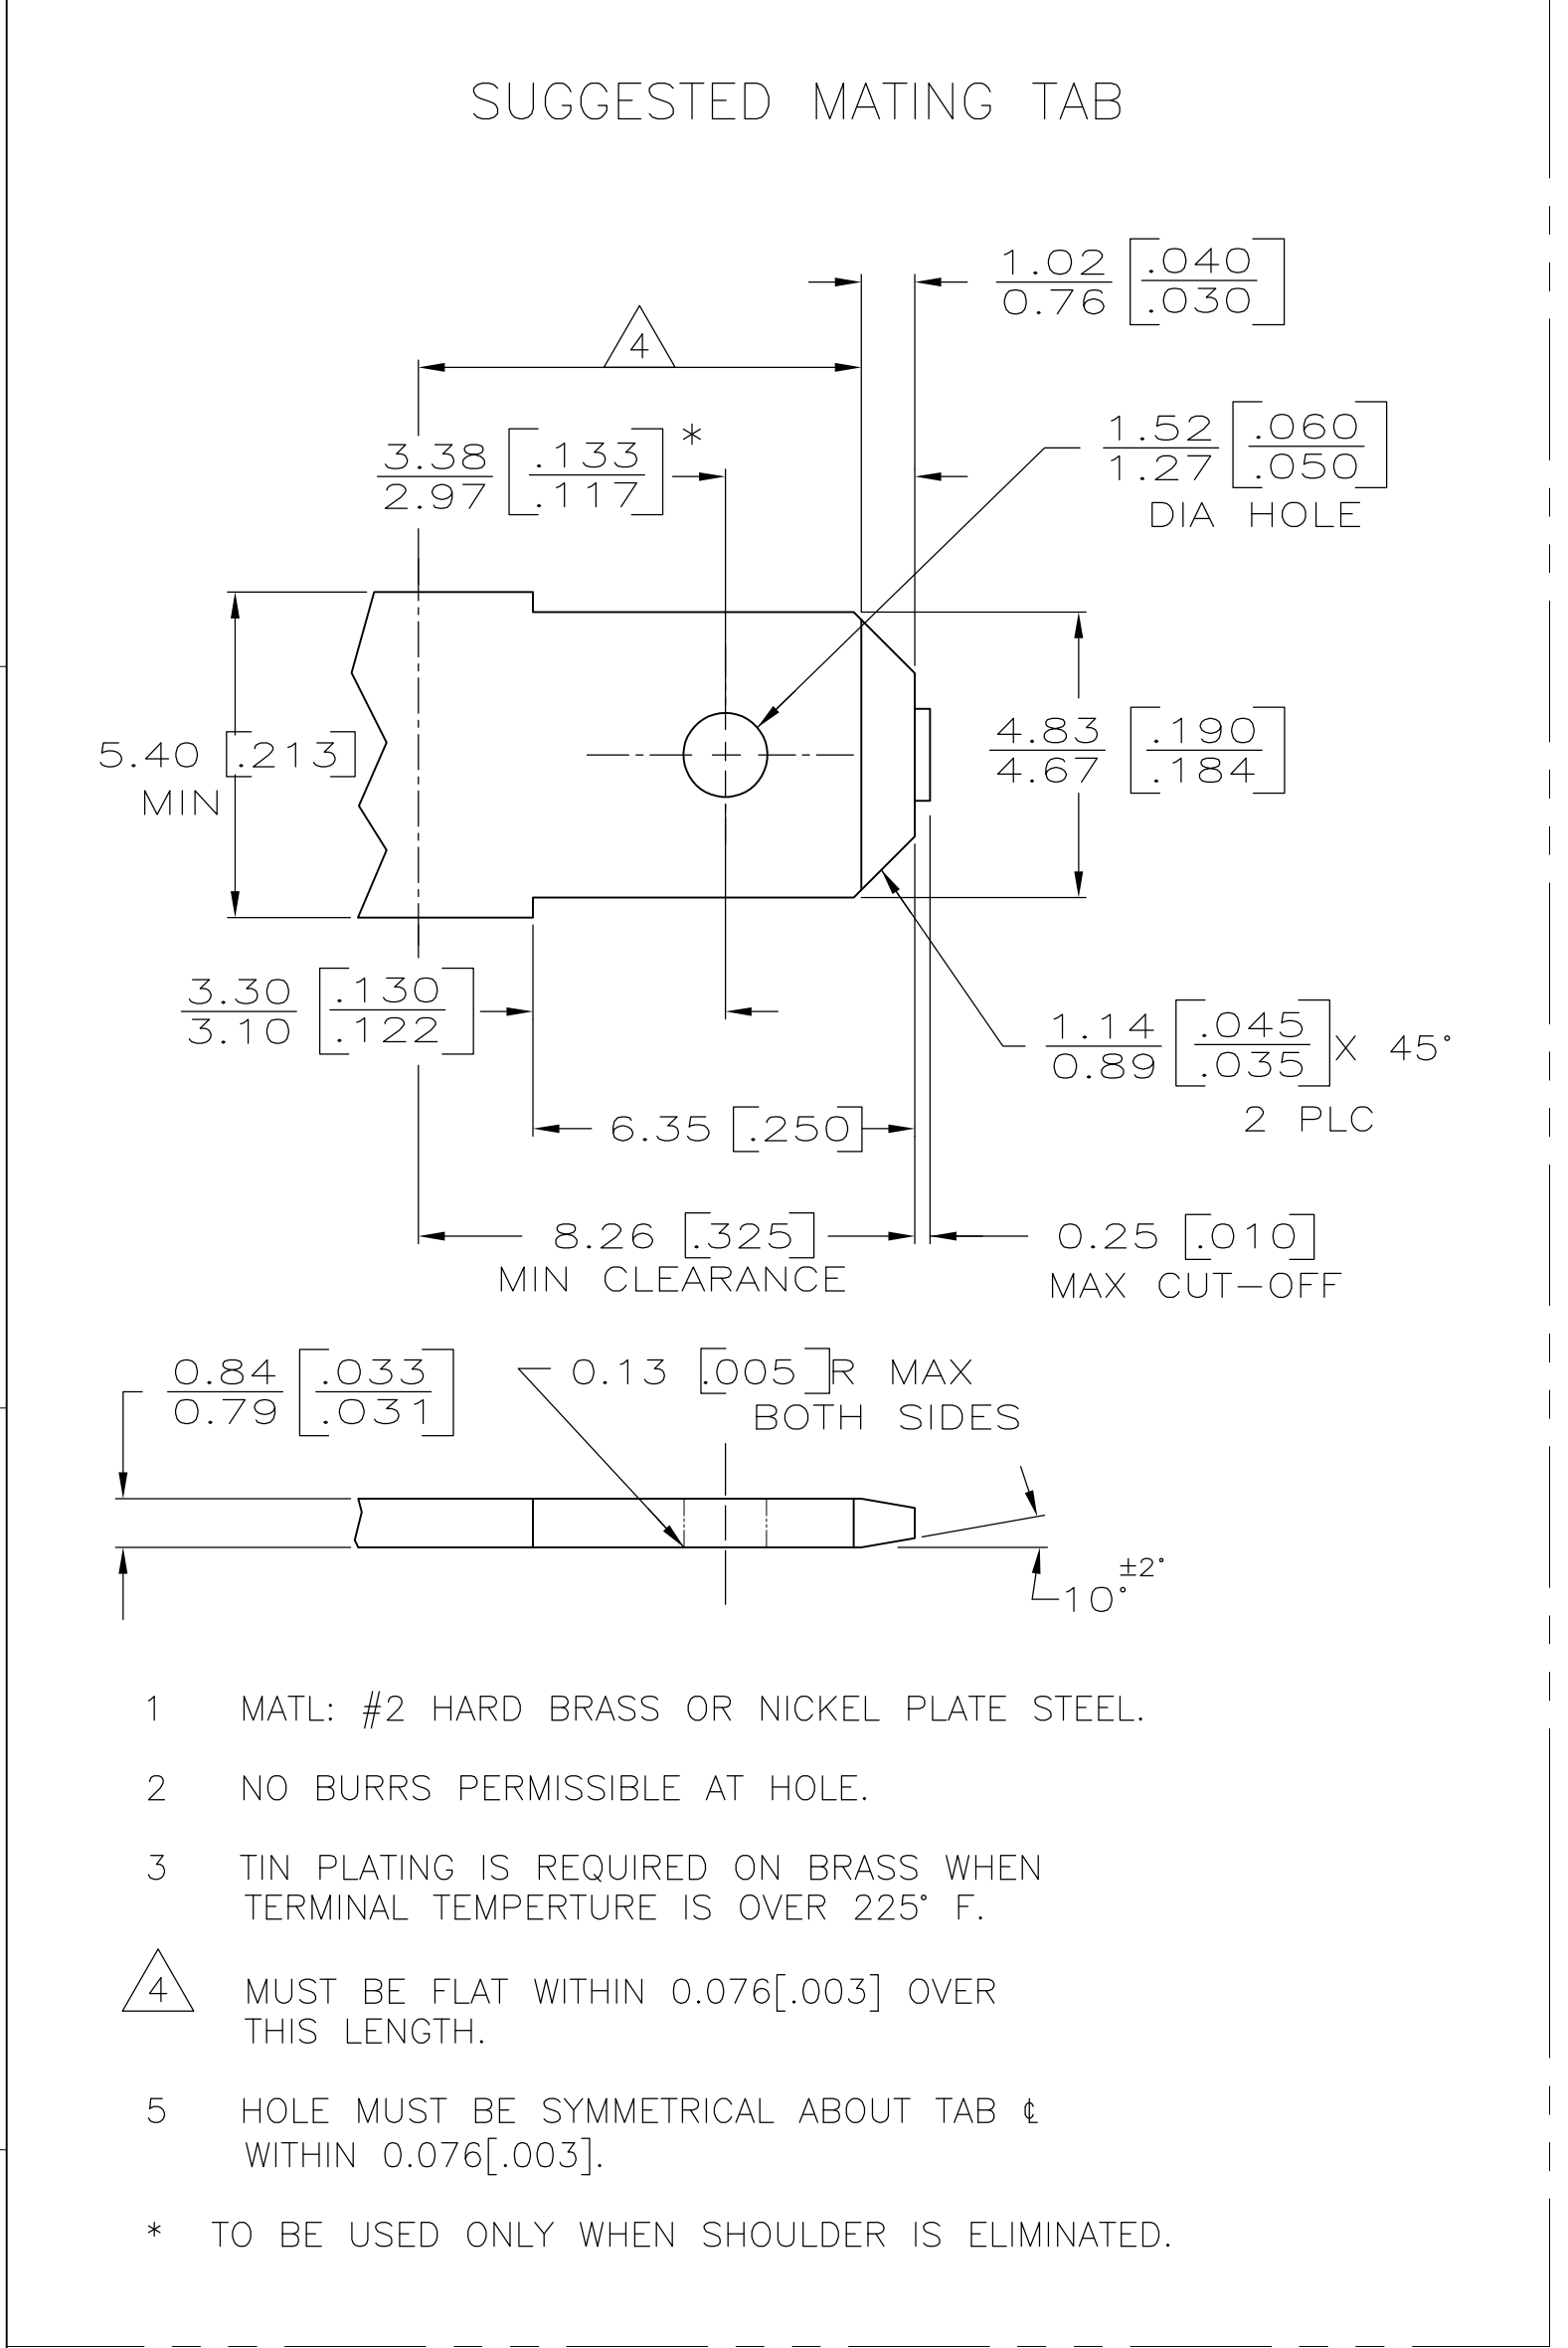

- 1 CONTINUOUS STRIP ON REELS.
- 2 ACCEPTS [#18-#14] SINGLE WIRE SIZES
AND COMBINATION OF TWO [#18'S]
WIRE CRIMP IS 3.05 [.120], F TYPE.
- 3 FITS INSULATION RANGE OF 3.81-5.08
[.150-.200] DIA OR TWO WIRES AT 2.79
[.110] MAX DIA.
INSULATION CRIMP IS 5.59 [.220], F TYPE

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50						
			D	REVISED PER ECR-13-011489	14DEC2013	KH	PD

0.002032 [.000080] MIN TIN		1217096-2	
—		1217096-1	
FINISH		PART NO.	
TE Connectivity			
NAME RECEPTACLE, POSITIVE-LOCK, MARK III, 4.75 [.187] SERIES			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1217096	—
		SCALE	SHEET
		6:1	1 OF 1
		REV	D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	6/26/98
		CHK	6/26/98
		APVD	6/26/98
		PRODUCT SPEC	
		APPLICATION SPEC	
		WEIGHT	-
		CUSTOMER DRAWING	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ± -	
		1 PLC ± -	
		2 PLC ± 0.25 [.010]	
		3 PLC ± -	
		4 PLC ± -	
		ANGLES ± -	
MATERIAL		FINISH	
BRASS		SEE TABLE	