
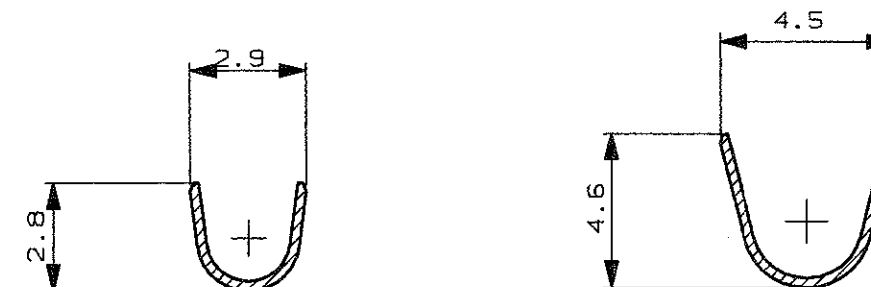
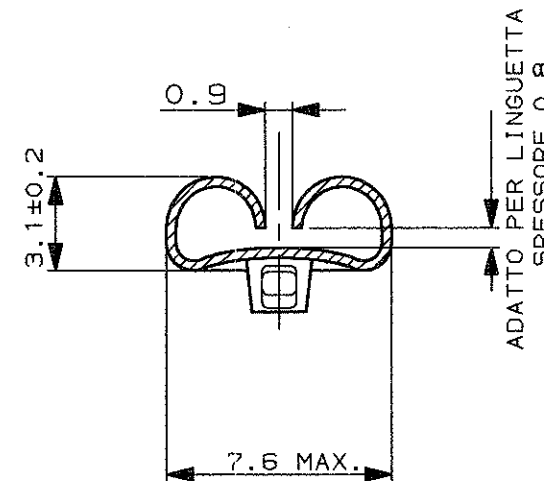


SEZIONE B-B

SEZIONE C-C

SEZIONE D-D

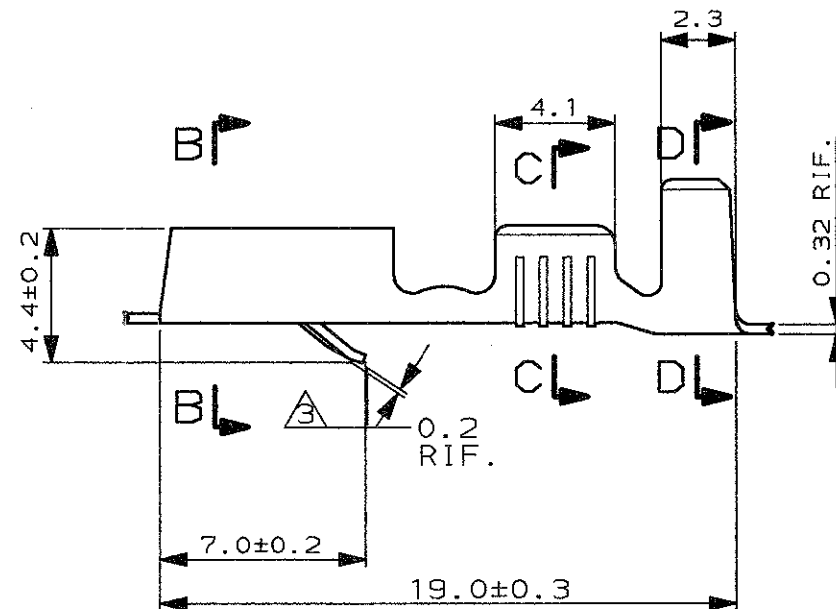


1) SPECIFICA DI PRODOTTO : 108-20020 ; SPECIFICA DI APPLICAZIONE : 114-20021
(PRODUCT SPEC. : 108-20020 ; APPLICATION SPEC. : 114-20021)

2) BOBINATO SU BOBINA DA 12" IN CARTONE CON CARTA INTERPOSTA
(REELED ON 12" CARTON TYPE REEL WITH INTERLAYER PAPER STRIP)

3) NERVATURA DI RINFORZO
(BEAT IN LOCKING LANCE)

4) ADATTO PER APPLICAZIONI AD ELEVATA FORZA DI ESTRAZIONE
(SUITABLE FOR HIGH EXTRACTION FORCE APPLICATION)

5) OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

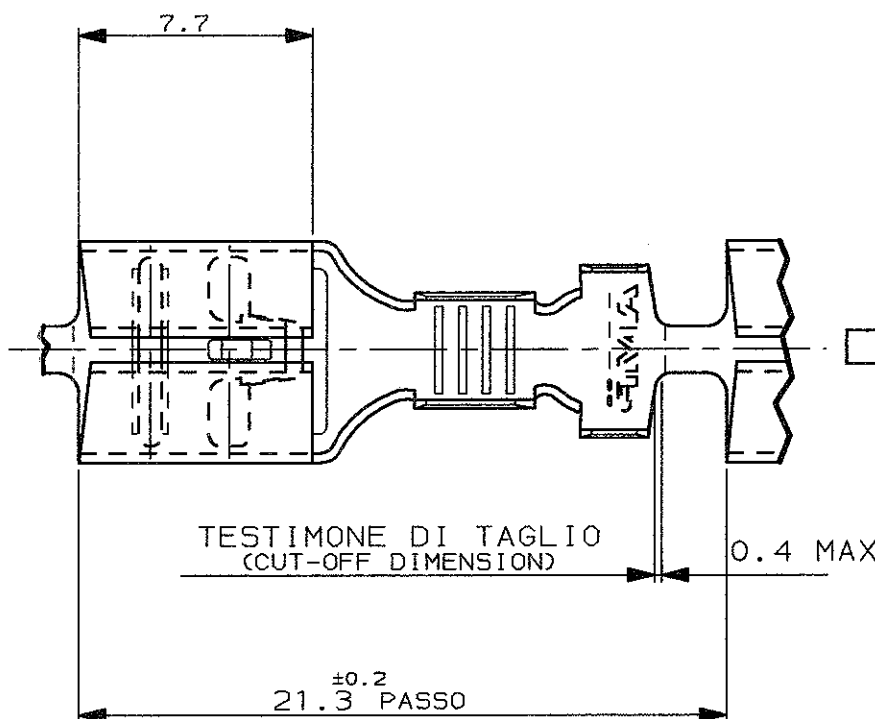

SENSO DI USCITA
DEL TERMINALE DALLA BOBINA
(DIRECTION OFF
TOP OF REEL)

STATO DI FORNITURA -SCALA 1:1



5	OBSOLETE	NUDO	OTTONE	4	280095-6
5	OBSOLETE	NUDO	BR.FOSFOROSO		280095-3
		PRE-STAGNATO	OTTONE	2	280095-2
		NUDO	OTTONE		280095-1
		FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)		NUMERO (PART NUMBER)

CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO	
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION	
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING		19	
TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)		DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)
± 0.3		DIA 3.3 MAX.	0.3-0.8 mm²
ANGOLI (ANGLES)		± 2°	4:1
DIS. 6 GIUGNO 91 (DR.) VERGANO P.		DESCRIZIONE (DESCRIPTION)	
P2 ECO-09-026346		FASTIN-FASTON® Connector, .250"sr. REC. CONTACT	
P1	ACTIVATED DASH 6 ET00-0249-00	H.Y.	22 560
P	CHANGED RAW MAT'L. PACKAGING ET00-0050-00	R.F.	31-05
REV.	REVISIONI (REVISION RECORD)	DIS. DATA (DR) (DATE)	APP. DATA (APP.) (DATE)
I A3		C-280095	
P2		1	