




Terminals & Splices > Quick Disconnects

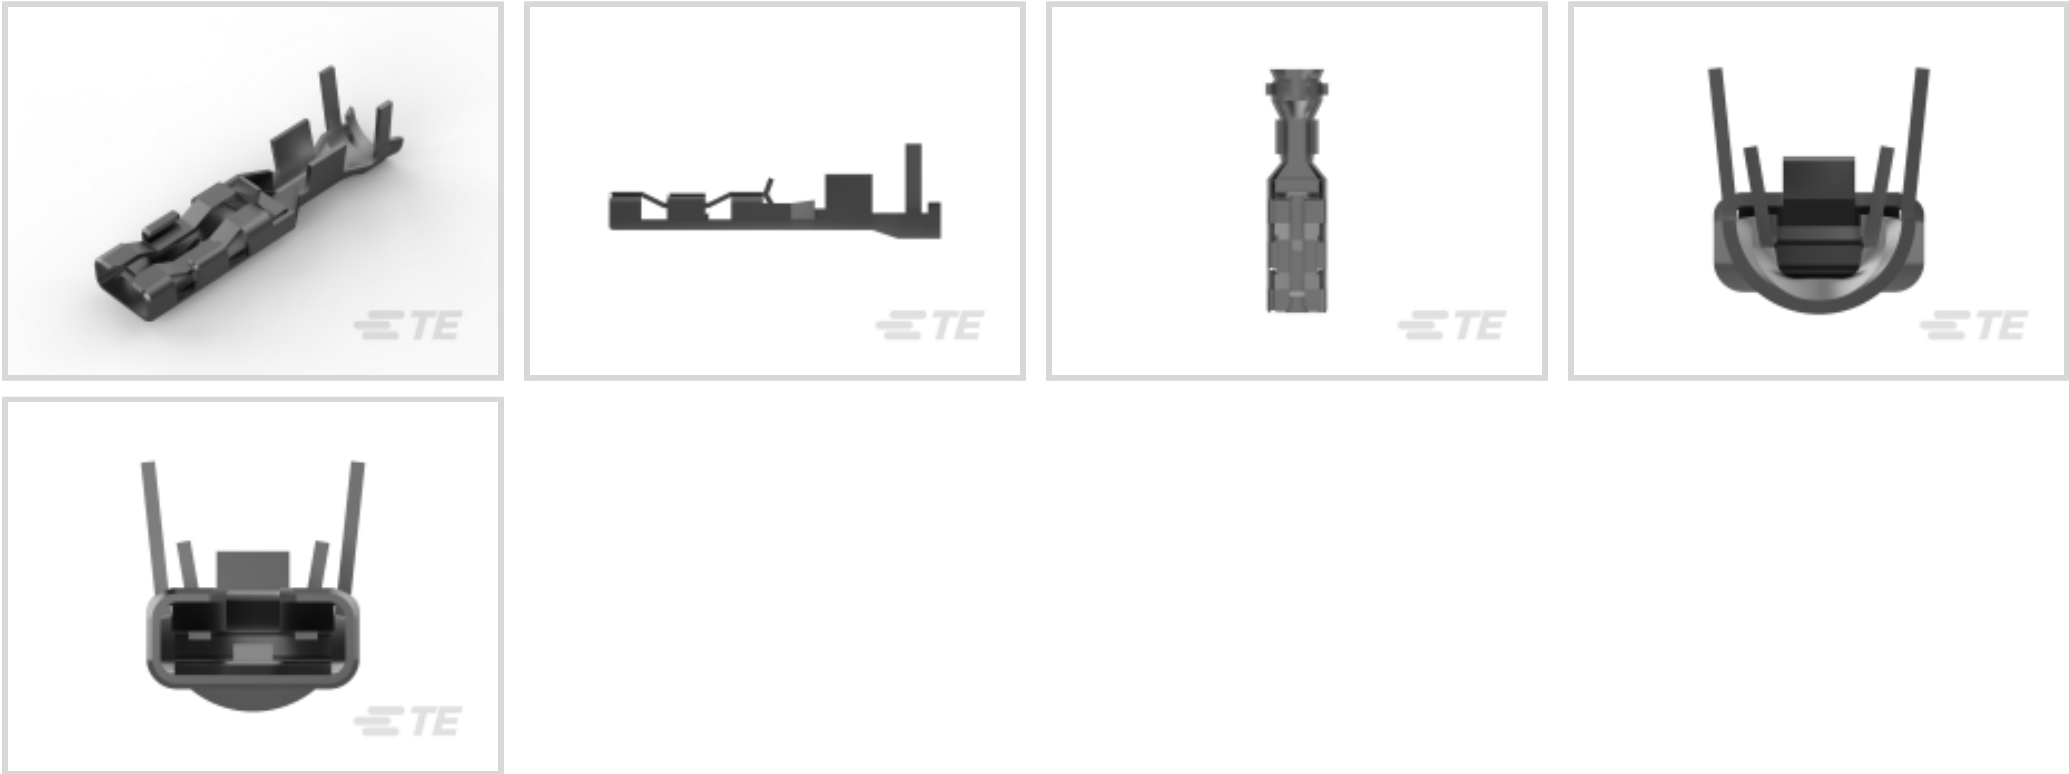

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.31 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Terminal Orientation: **Straight**

Features

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------



Dimensions

Terminal Material Thickness	.25 mm[.01 in]
Compatible Insulation Diameter Range	2.01 – 3.1 mm[.079 – .12 in]
Wire Size	.51 – 1.31 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	4000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>





EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

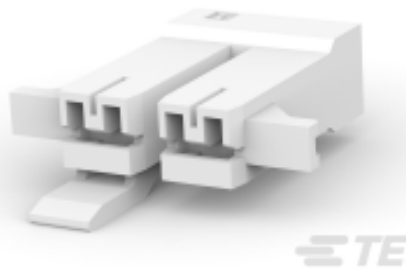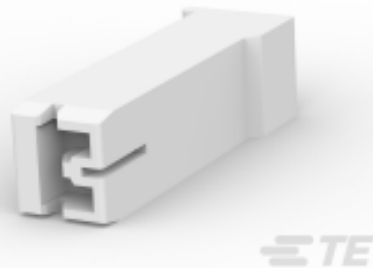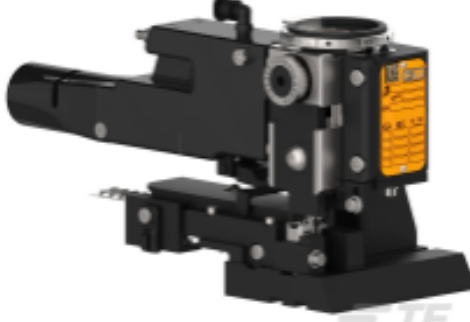






 TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	 TE Part # 353253-1 PL EX 110 (2.8 MM) HOUSING RECEPTACLE	 TE Part # 353251-1 PL EX 110 (2.8 MM) HOUSING RECEPTACLE	 TE Part # 353255-7 110 HSG. PL EX REC. 7.6mm 3P RED
 TE Part # 353255-1 110 HSG. PL EX REC. 7.6mm 3P NAT	 TE Part # 2-2151117-1 OCEAN_2.0_Applicator-S-080F130F	 TE Part # 2-2151117-2 OCEAN_2.0_Applicator-S-080F130F	 TE Part # 2151117-1 OCEAN_2.0_Applicator-S-080F130F
 TE Part # 2151117-2 OCEAN_2.0_Applicator-S-080F130F	 TE Part # 7-2151117-1 OCEAN_2.0_Applicator-S-080F130F	 TE Part # 7-2151117-2 OCEAN_2.0_Applicator-S-080F130F	 TE Part # 7-2151117-7 OCEAN_2.0_SPARE_PART_KIT-080F130F

Also in the Series | Positive Lock 110

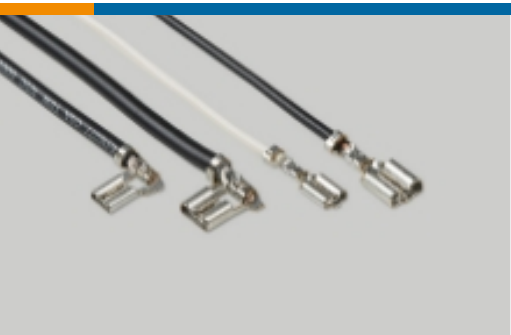 Crimp Terminal Housings(12)	 Insertion & Extraction Tools(1)	 Quick Disconnects(8)
--	--	---

Customers Also Bought

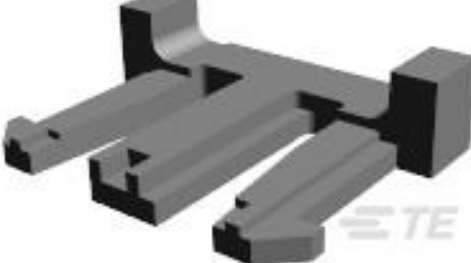 TE Part #917699-1 2.5 SIGNAL DBL LOCK D.L.P 3P	 TE Part #917765-1 2.5 SIGNAL D/LOCK TAB CONT. M	 TE Part #176498-1 POSITIVE LOCK 187 (4.8 MM) HOUSING	 TE Part #1-1565087-2 GRACE INERTIA CONNECTOR 3.5 4P
---	--	---	--

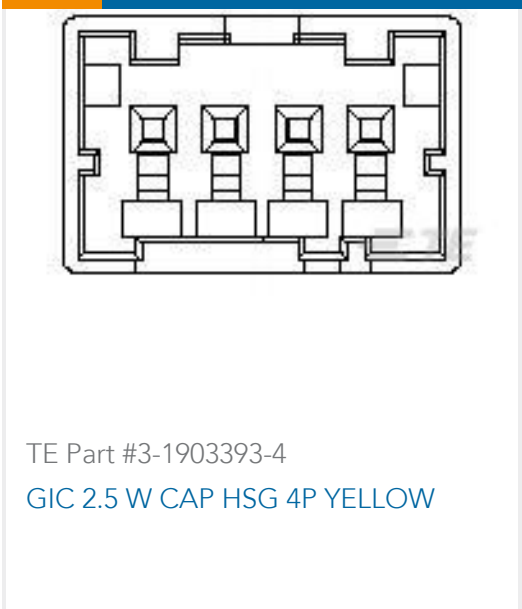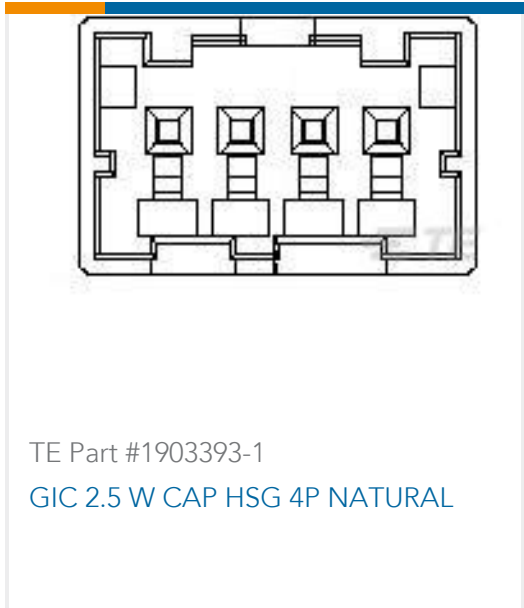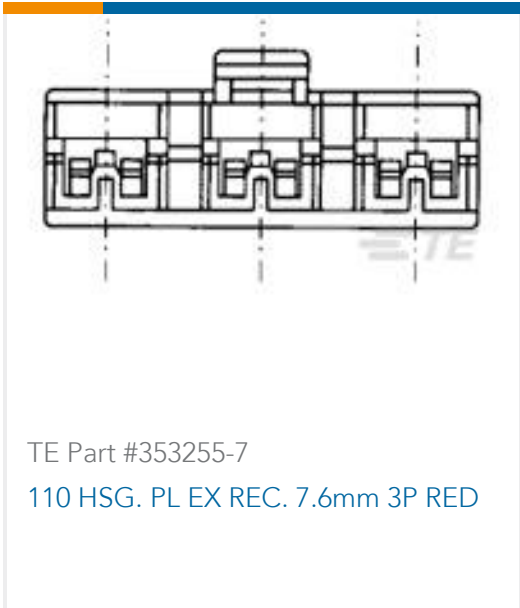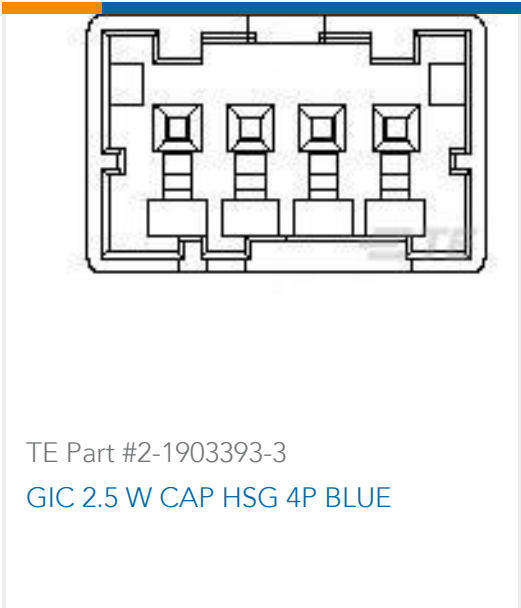

Documents

Product Drawings

110 PL EX REC. 20-16AWG PTPHBZ

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_353250-2_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_353250-2_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_353250-2_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

110 Series Positive Lock EX-III Contact

Japanese

Application Specification

Japanese

110 Series Positive Lock EX-III Contact

English



Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

Japanese

English

Agency Approvals

UL Report

English