

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N1	REVISED PER ECR–20–009164	28JUL2020	MK	DH

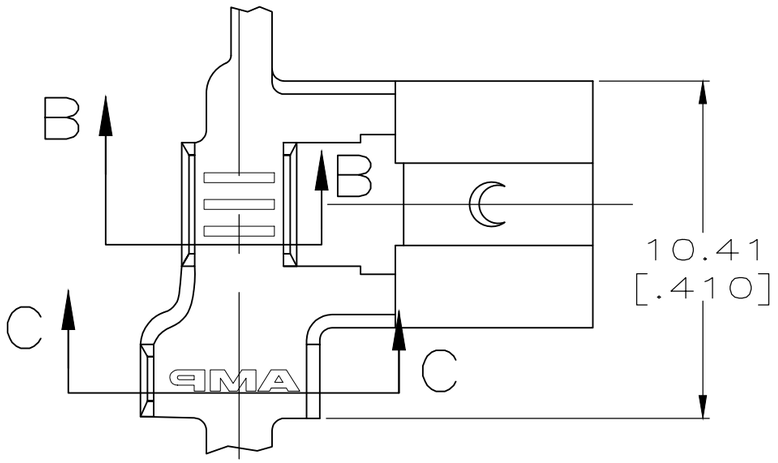

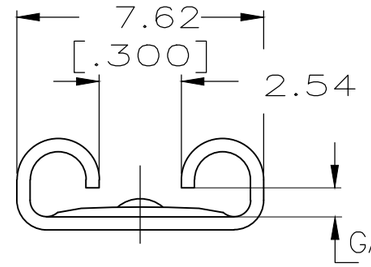

VIEW A–A

GAP AS REQUIRED TO MEET FORCE SPECIFICATIONS AND 0.71 [.028] MAX


1 CONTINUOUS STRIP ON REELS.


2 WIRE SIZE IS 0.6–2.0mm [18–14] AWG.

3 INSULATION RANGE IS 2.79–4.06 [.110–.160] DIA.


4 MATING TAB THK IS 0.84–0.76 [.033–.030].

5 SPECIAL PACKAGING QUANTITY

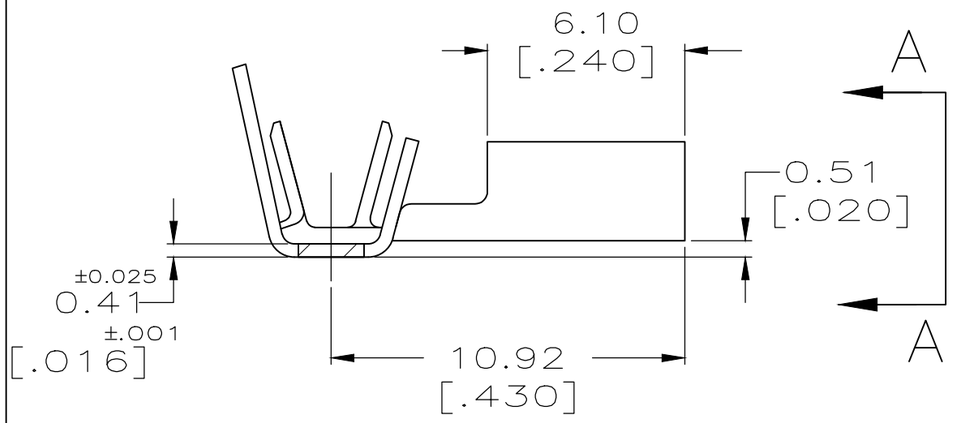

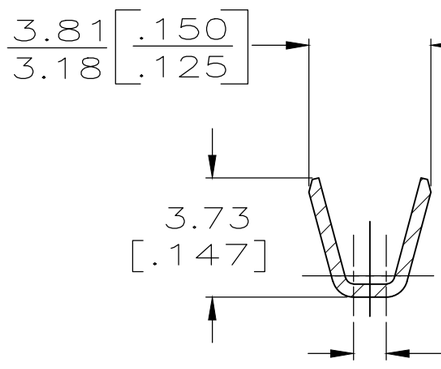

SECTION B–B

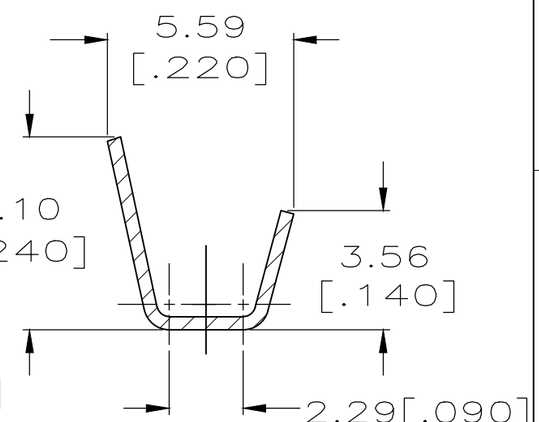

SECTION C–C

OBSOLETE	.000080 MIN TIN	5 63012–3
	TIN	63012–2
	–	63012–1
	PLATING	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± 0.38 [.015]
4 PLC	± –
ANGLES	± –

MATERIAL: BRASS

FINISH: SEE TABLE

DWN	JR RUTH	4/8/91
CHK	MS FEHER	4/8/91
APVD	C MEYERS	4/8/91
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

CUSTOMER DRAWING

TE Connectivity

NAME: RECEPTACLE, FASTON, FLAG, 6.35 [.250] SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–63012	–

SCALE	SHEET	REV
5:1	1 OF 1	N1