63688-1 ✔ ACTIVE

FASTON | FASTON 250


TE Internal #: 63688-1

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, Steel, FASTON 250

View on TE.com >

Terminals & Splices > Quick Disconnects



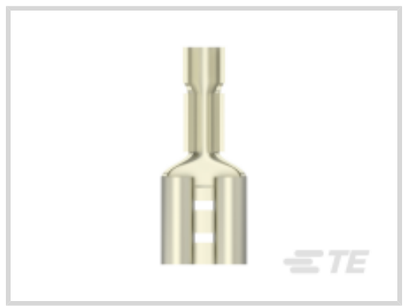



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Steel
Terminal Plating Material	Nickel
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	19.18 mm[.755 in]
Compatible Insulation Diameter Range	1.52 – 2.8 mm[.06 – .11 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 250 °C[-40 – 482 °F]

Industry Standards

Agency/Standard	CSA, UL

Packaging Features

Packaging Quantity	11000
Packaging Method	Strip/Reel

Other

Line	Premier

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 63892-1
250 FASTON REC 16-12 AWG NPST



TE Part # 2-2150551-1
OCEAN_2.0_Applicator-E-110F120O



TE Part # 2-2150551-2
OCEAN_2.0_Applicator-E-110F120OA



TE Part # 2150551-1
OCEAN_2.0_Applicator-E-110F120O




TE Part # 2150551-2
OCEAN_2.0_Applicator-E-110F120OA



TE Part # 7-2150551-1
OCEAN_2.0_Applicator-E-110F120O



TE Part # 7-2150551-2
OCEAN_2.0_Applicator-E-110F120OA

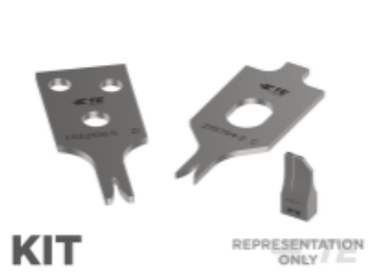

TE Part # 7-2150551-7
OCEAN_2.0_SPARE_PART_KIT-110F120O

Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(142)




Insertion & Extraction Tools(6)



Magnet Wire Terminals(1)



PCB Terminals(135)

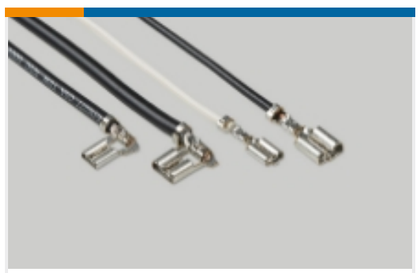

Quick Disconnects(445)



Splices(4)

Customers Also Bought



TE Part #770903-1
MINI UMNL PIN 22-18 AWG SN



TE Part #1217345-1
110 FASTON,REC.,16-18 AWG,BR




TE Part #3-644860-6
06P MTA156 CONN ASSY 18AWG LF



TE Part #5-1462000-9
C93430=MT Relay 550 mW 48 V



TE Part #9-1440003-3
PCH-112D2H,000

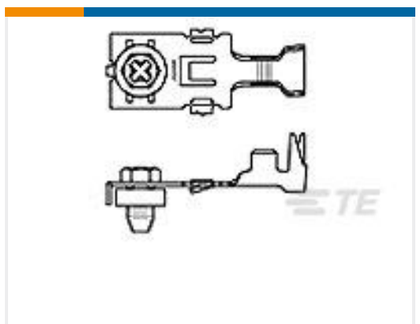

TE Part #520936-1
POWER RING 250 ASY 16-10 AWG NL



TE Part #4-1241961-3
2POS.STD.TIMER HSG.MARK II



TE Part #2232327-2
CLUSTER BLOCK HSG .090 DIA



TE Part #521306-1
110 FASTON HSG. REC 5MM2P NATURAL

TE Part #2071369-3
OJE-SH-112DM,00E3W

Documents

Product Drawings

250 FASTON REC 18-14 AWG NPST

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_63688-1_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_63688-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_63688-1_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

82004 FASTON Terminals (Insulated and Uninsulated) Catalog - FASTON Receptacles Section

English

Product Specifications

Application Specification

English

Product Environmental Compliance

MD_63688-1_111620181055_dmtec

English

MD_63688-1_111620181055_dmtec

English

Agency Approvals

Agency Approval Document

English