
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REVISED PER ECR-13-004343	30JUL13	KH	KR

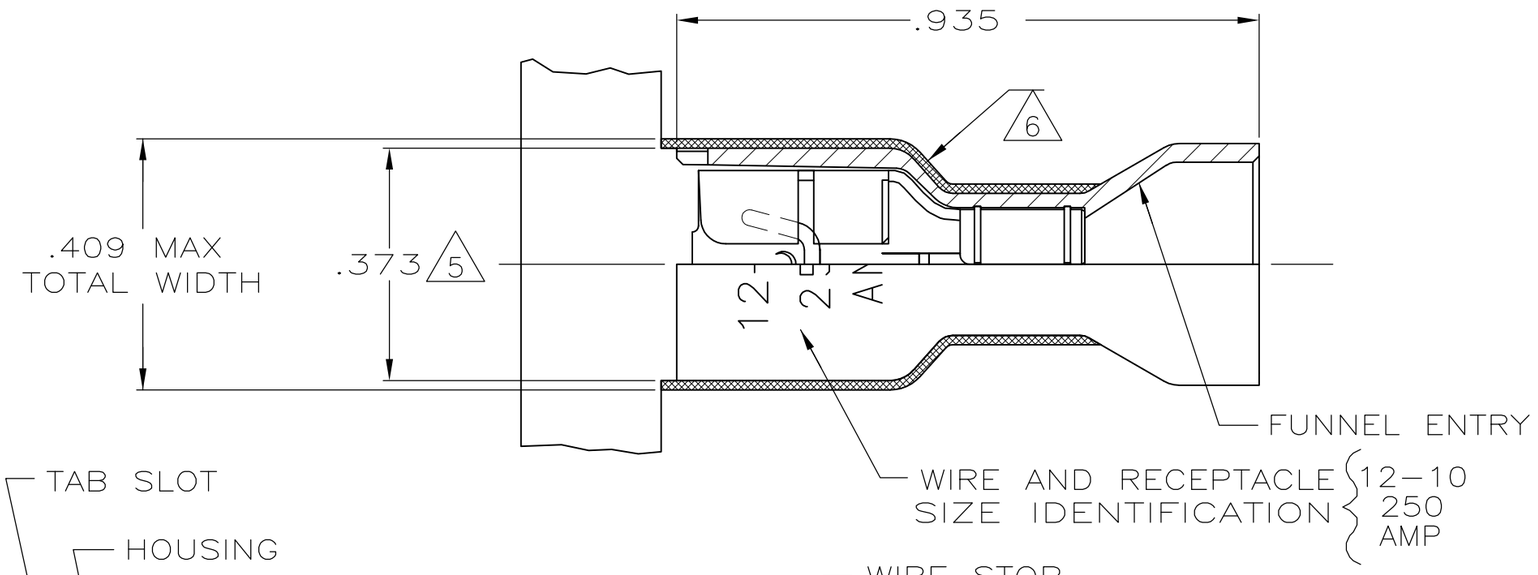

1 MATES WITH .032±.001x.250 TAB

2 WIRE STRIP LENGTH .312

3 INSULATION SIZE .320 MAX DIA

4 CONTINUOUS STRIP ON REELS

5 DIMENSION DOES NOT INCLUDE TRIM BURR

6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

MATERIAL & FINISH	PART NO
HOUSING:NYLON,COLOR-BLACK TRANSLUCENT RECEPTACLE: BRASS,TIN	9-520447-2
HOUSING:NYLON,COLOR-YELLOW TRANSLUCENT RECEPTACLE: BRASS,TIN	4-520447-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .015
4 PLC ± -
ANGLES ± -

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN P FORTNEY 11/4/88
CHK MS FEHER 11/7/88
APVD K RANDOLPH 11/7/88
PRODUCT SPEC 108-2043
APPLICATION SPEC 114-2123
WEIGHT -

TE Connectivity

NAME: RECEPTACLE ASSEMBLY,ULTRA-FAST, .250 SERIES,12-10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-520447	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV L