



MATERIAL NUMBER	ENGINEERING NUMBER	CARRIER	TAB THICKNESS	LOGO ORIENTATION	REEL CENTER HOLE ø REF.
197084023	19708-4023	STRIP	.020/0.51	IN	.750/19.05
197084033	19708-4033	STRIP	.032/0.81	IN	1.250/31.75

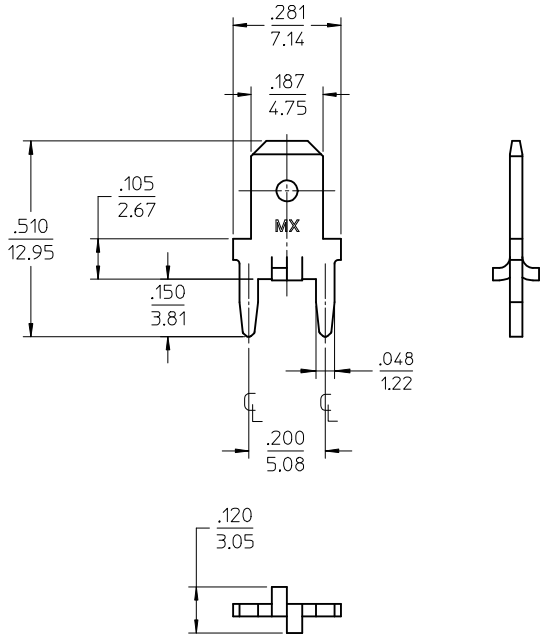




RECOMMENDED PCB
HOLE LAYOUT



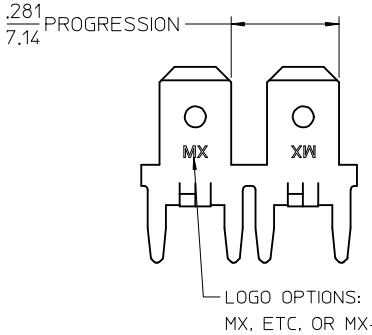

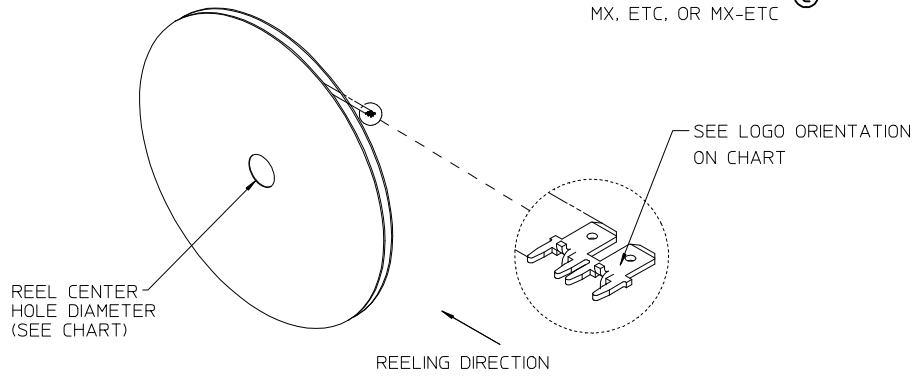

NOTES:

1. BARE EDGES PERMISSIBLE AT CARRIER CUT OFF.
2. MATERIAL: BRASS C26000
3. MATERIAL THICKNESS: SEE CHART
4. TAB CONFORMS TO NEMA SPECIFICATIONS.
5. ALL DIMENSIONS AND NOTES REFERENCE UNLESS OTHERWISE NOTED.
6. PLATING: MATTE TIN, 150µ IN/3.81µmm MINIMUM THICKNESS OVER NICKEL 50µ IN/1.25µmm MINIMUM THICKNESS.
7. REF.: 10,000 MINIMUM PARTS PER REEL, REEL HAS 24" DIAMETER REEL WITH A (SEE CHART) DIAMETER CENTER HOLE.
8. © PART IS ROHS COMPLIANT.

ADDED LOGO OPTIONS & ROHS
EC NO: ETC2007-0338 2007/03/15
DRWN:EHILE 2007/03/26
CHKD:JMACNEIL 2007/03/27
APPR:JMACNEIL 2007/03/27
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ± 1 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	IN/MM
SCALE	4:1
DESIGN UNITS	INCH
	THIRD ANGLE PROJECTION
DRAWN BY	JPAWLICK
DATE	01/06/14
CHECKED BY	RDEROSS
DATE	01/06/15
APPROVED BY	RDEROSS
DATE	01/06/15
MATERIAL NO.	SEE CHART
TITLE	QUICK DISCONNECT, PCB MOUNT, .187 X .032/.020 TAB W/STABILIZERS
	MOLEX INCORPORATED
DOCUMENT NO.	SD-19708-001
SHEET NO.	1 OF 1
SIZE	C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION