

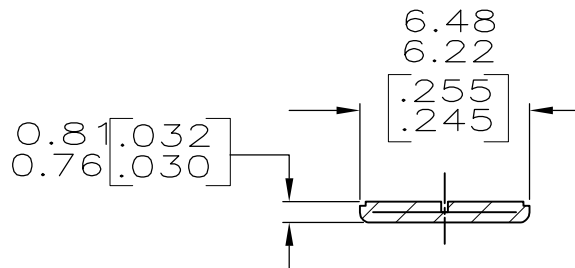
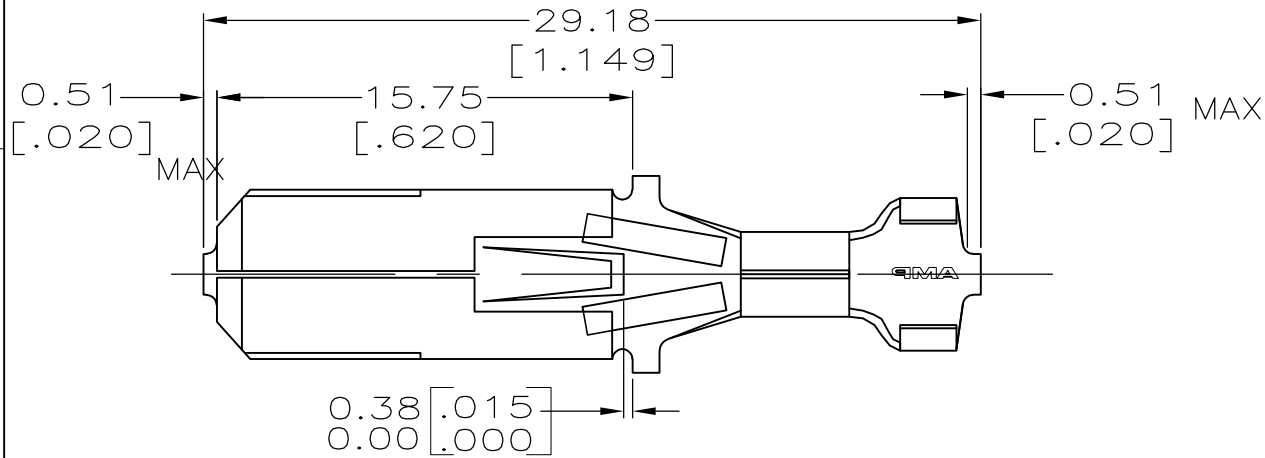



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		P	REVISED PER ECO-11-004820	11MAR11	RK	HMR

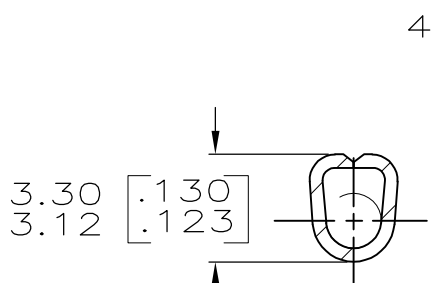

SECTION A-A

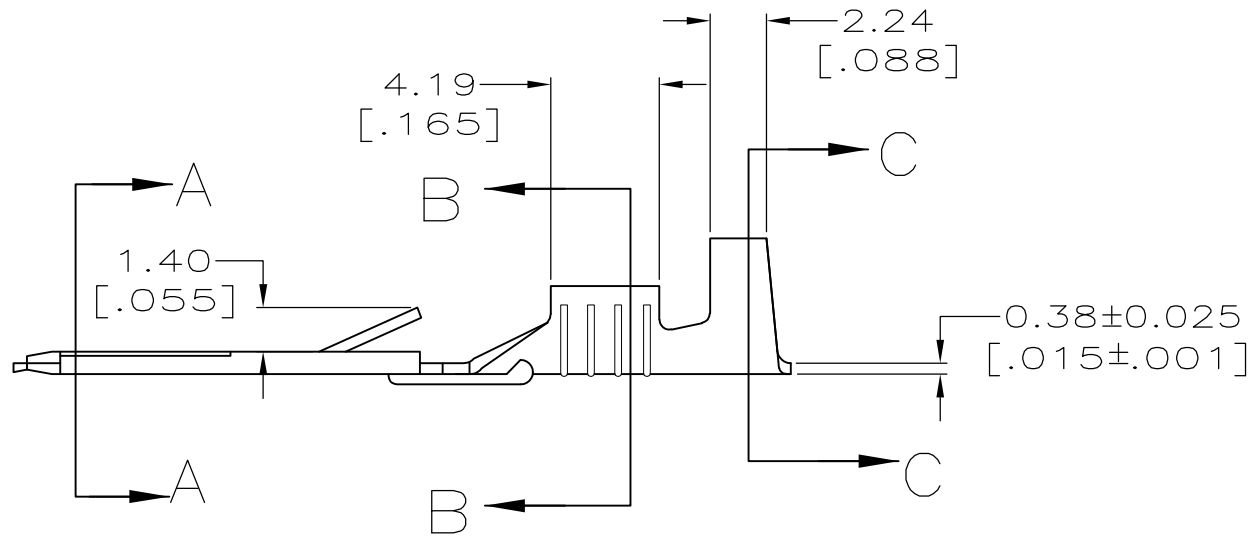


SECTION B-B
SCALE 5:1
PRE-CRIMPED

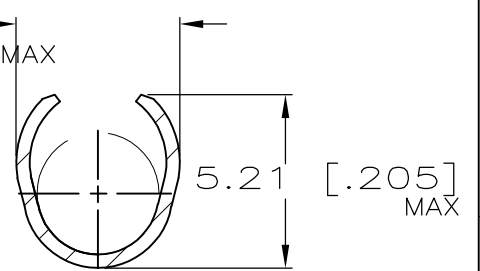

SECTION C-C
SCALE 5:1
PRE-CRIMPED

- 1 SUPPLIED IN LOOSE PIECE.
- 2 FOREIGN PRODUCTION ONLY.
- 3 WIRE BARREL ACCEPTS A [#18-#14] AWG.
- 4 INSULATION RANGE IS 3.05-4.06 DIA [.120-.160] DIA.

2	0.003048 [.000120] MIN SILVER	H02 BRASS	42241-3
2	0.002032 [.000080] MIN TIN	H02 BRASS	42241-2
2	NONE	H02 BRASS	42241-1
FINISH		MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 4/11/95		TE Connectivity							
		CHK MS FEHER 4/11/95									
		APVD J GILLESPIE 4/13/95									
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME							
		0 PLC ± -		TAB, FASTIN-FASTON, 6.35 [.250] SERIES							
		1 PLC ± -									
		2 PLC ± 0.38 [.015]									
		3 PLC ± -									
4 PLC ± -		PRODUCT SPEC		SIZECAGE CODEDRAWING NORESTRICTED TO							
ANGLES ± -		APPLICATION SPEC									
		—									
MATERIAL		FINISH		WEIGHT		A300779C-42241		—			
SEE TABLE		SEE TABLE		—							
CUSTOMER DRAWING						SCALE 4:1		SHEET 1 of 1		REV P	