


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

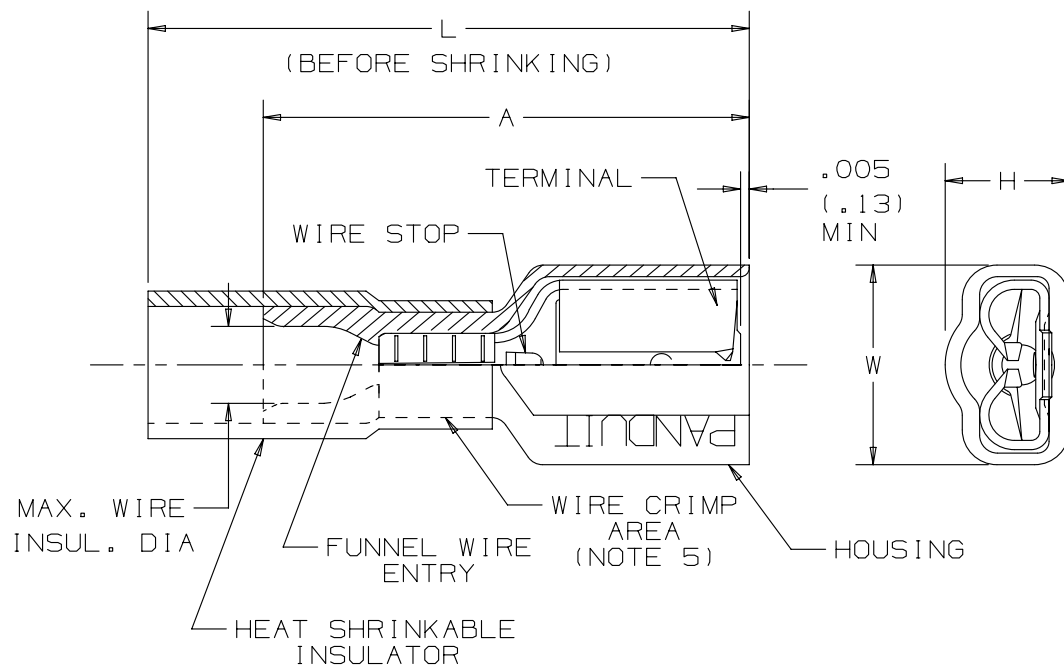

NOTES :

1. FOR USE WITH STRANDED COPPER WIRE ONLY
(SEE TABLE FOR WIRE RANGE)
2. MATERIAL:
 - A. TERMINAL - CDA 260 BRASS, TIN PLATED
 - B. HOUSING - TYPE 66 NYLON
 - C. INSULATOR - HEAT SHRINKABLE POLYOLEFIN
WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 250°F (120°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL.
DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. PART NUMBER DNH10-250F1 IS CONSTRUCTED
WITH A BRASS SLEEVE IN WIRE CRIMP AREA.
6. INSTALLATION TOOL: CT-310
7. PKG. QTY. : STD. PKG. -Q=25
 -E=20
 BULK PKG. -D=500
 -T=200
8. Maximum continous operating
 temperature 230°F (110°C)
9. Minimum continous operating
 temperature -65°F (-55°C)

PART NUMBER		TAB SIZE	WIRE RANGE AWG	HOUSING COLOR	MAX. INSUL. DIA	DIMENSIONS				STRIP LENGTH
						A	W	H	L	
DNH18-250F1B	-Q -D	.250 X .032 (6.3 X 0.8)	22-18	RED	.132 (3.35)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH14-250F1B	-Q -D	.250 X .032 (6.3 X 0.8)	16-14	BLUE	.156 (3.96)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH10-250F1	-E -T	.250 X .032 (6.3 X 0.8)	12-10	YELLOW	.230 (5.84)	.96 (24.4)	.35 (8.9)	.27 (6.9)	1.44 (36.6)	3/8 (9.5)

											TITLE				HEAT SHRINK FULLY INSULATED FEMALE DISCONNECTS				
												CUSTOMER DRAWING				PANDUIT			
												ITEM REVISION NAME		N41458BA/07					
												DATASET FILE NAME		N41458BA_DC/07A		MATERIAL: SEE NOTES			
												UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]							
												.X ± .1 [2.54] .XXX ± .005 [.127] .XX ± .01 [.25] ANGLES ± 5 °							
												- THIRD ANGLE PROJECTION				DRAWING NUMBER: A41458			
07	04-25-13	JBN	RTFI	RTFI	UPDATED DRAWING BORDER & TITLE BLOCK				A41458										
REV	DATE	BY	CHK	APR	DESCRIPTION				ECN		DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE		
											DRL	-	-	NONE			A		