

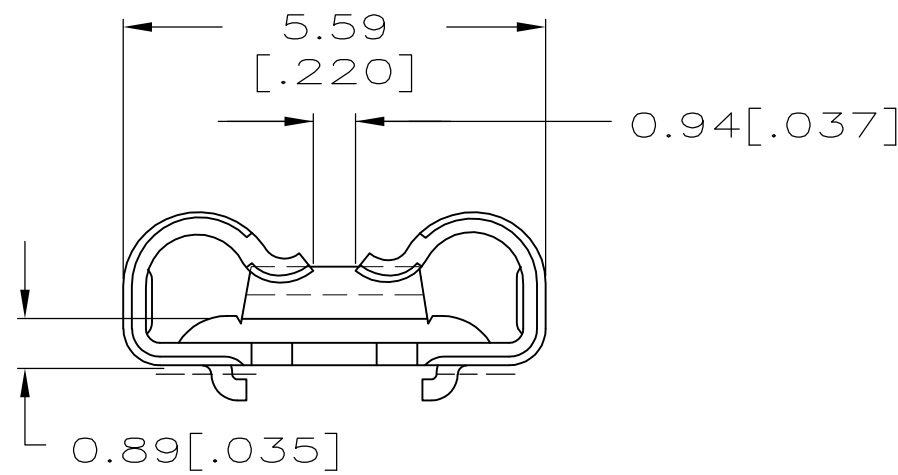


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		D	REVISED PER ECR-13-011489	12DEC2013	KH	PD

- 1
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 2
- CONTINUOUS STRIP ON REELS.
- 3
- THE $\frac{0.76}{0.64}$ $\frac{.030}{.025}$ DIMENSION MUST BE MAINTAINED BY THE APPLICATOR CUT-OFF TO ENSURE THE PROPER LOCKING FUNCTION OF THE RECEPTACLE.
- 4
- WIRE SIZES #20-#16, INSULATION RANGE IS 2.29-3.30 [.090-.130] DIA.
- 5
- THIS PART MATES WITH P/N 1217716-1.

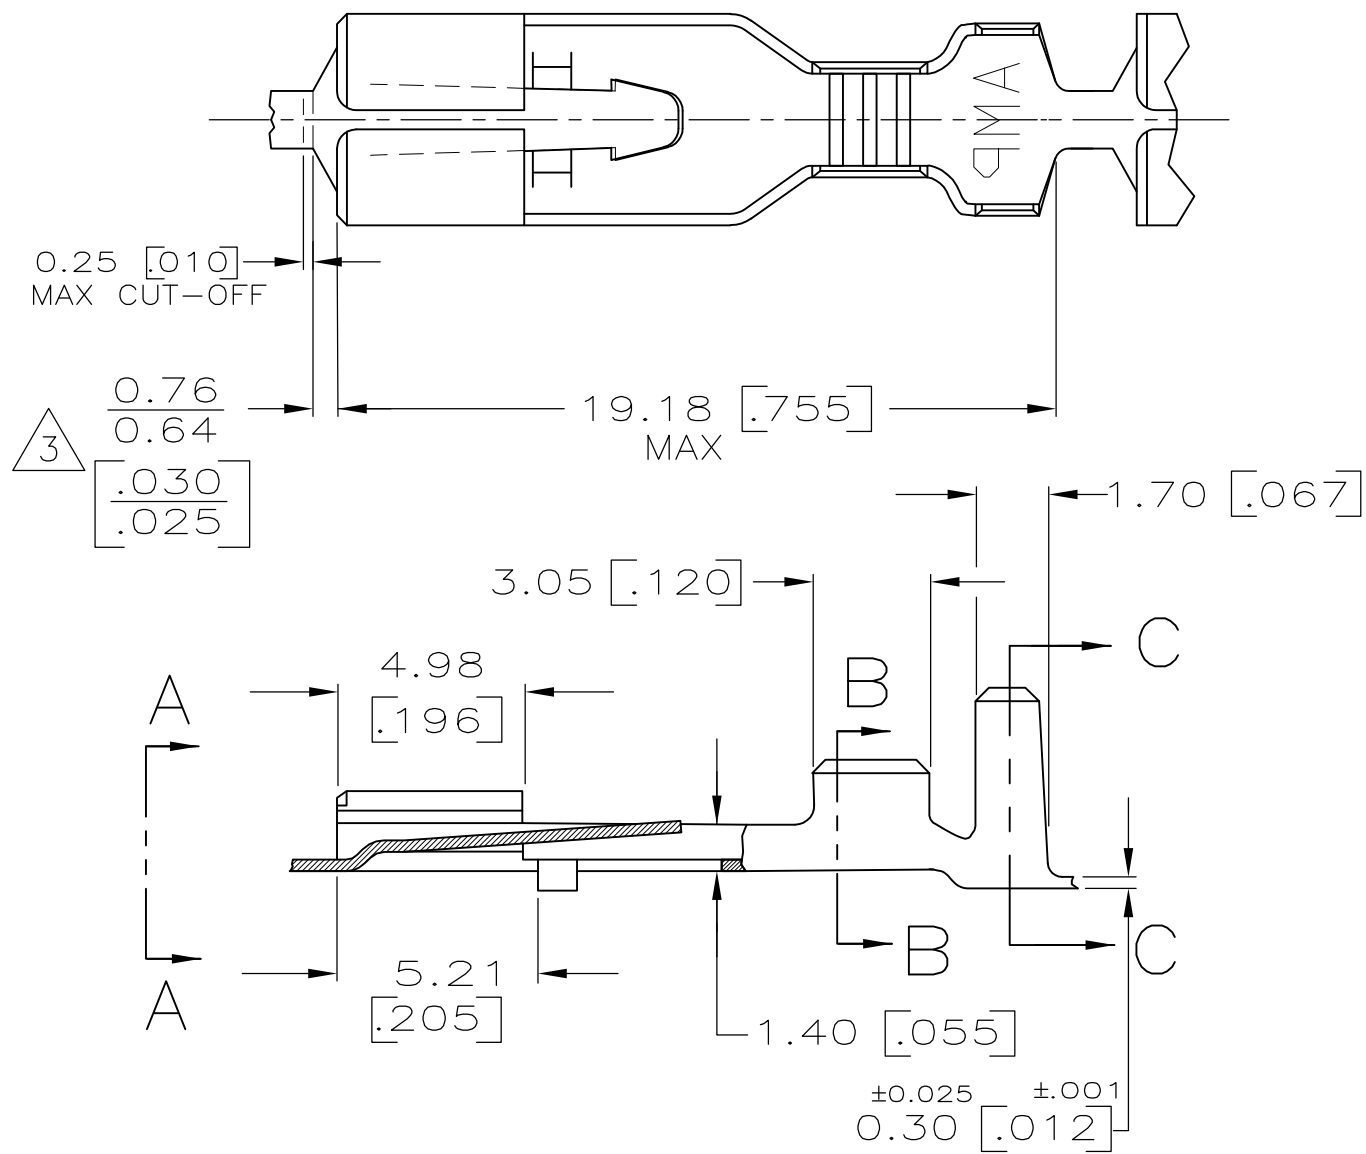

VIEW A-A

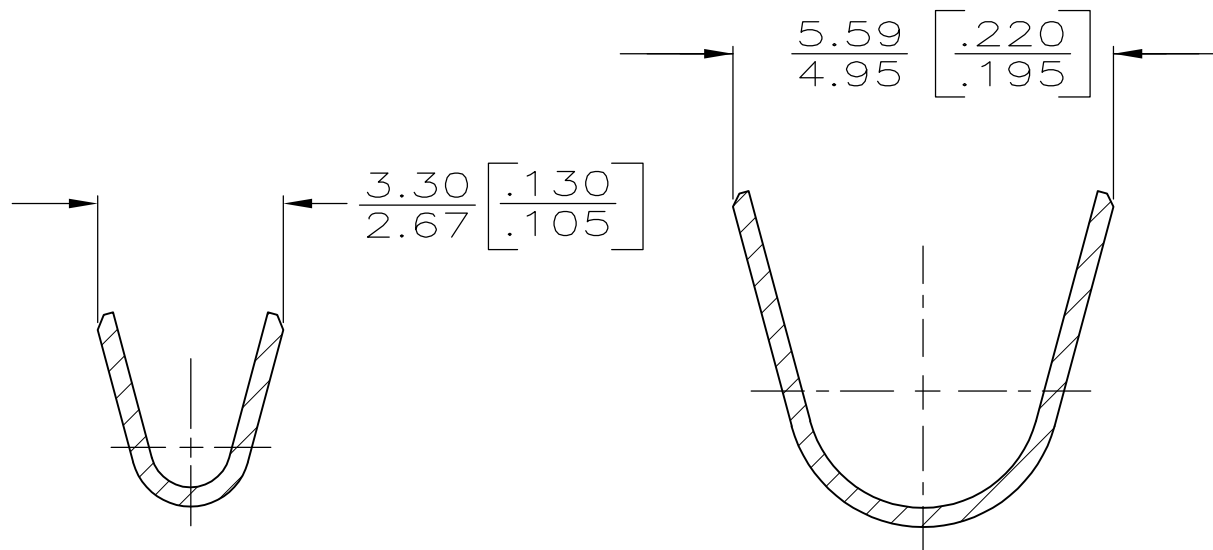


SECTION B-B

SECTION C-C

1217715-1

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH CHK D DECKER APVD D DECKER PRODUCT SPEC APPLICATION SPEC — — WEIGHT — CUSTOMER DRAWING		27SEP01 27SEP01 27SEP01		 TE Connectivity					
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		RECEPTACLE, SPECIAL, .187 SERIES					
		0 PLC ± —		SIZE A2		CAGE CODE 00779		DRAWING NO C-1217715		RESTRICTED TO —	
		1 PLC ± —									
		2 PLC ± 0.25 [.010]									
		3 PLC ± —									
		4 PLC ± —									
MATERIAL BRASS		FINISH .000080 MIN TIN		SCALE 5:1		SHEET 1 of 1		REV D			