


10		9		8		7		6		5		4		3		2		19006	
MATERIAL NO.	ENG. NO.	MATERIAL NO. TAPE MOUNTED	ENG. NO. TAPE MOUNTED	MATERIAL NO. STRIP MOUNTED	ENG. NO. STRIP MOUNTED	AWG	COLOR	MWID	"L" ±.015/.381	"E" ±.015/.381	"C" DIA ±.015/.381	"G" ±.015/.381	"H" ±.015/.381						
190060001	AA-5220	190060003	AA-5220T	190060004	AA-5220Z	22-18	RED	.150/3.81											
190060011	BB-5221	190060013	BB-5221T	190060014	BB-5221Z	16-14	BLUE	.170/4.32	.620/15.75	.512/13.00	.222/5.64	.690/17.53	.196/4.98						
190060019	C-5211	190060020	C-5211T	190060070	C-5211Z	12-10	YELLOW	.245/6.22	.667/16.94	.500/12.70	.242/6.15	.690/17.53	.196/4.98						
										.311/7.90	.677/17.20	.246/6.25							

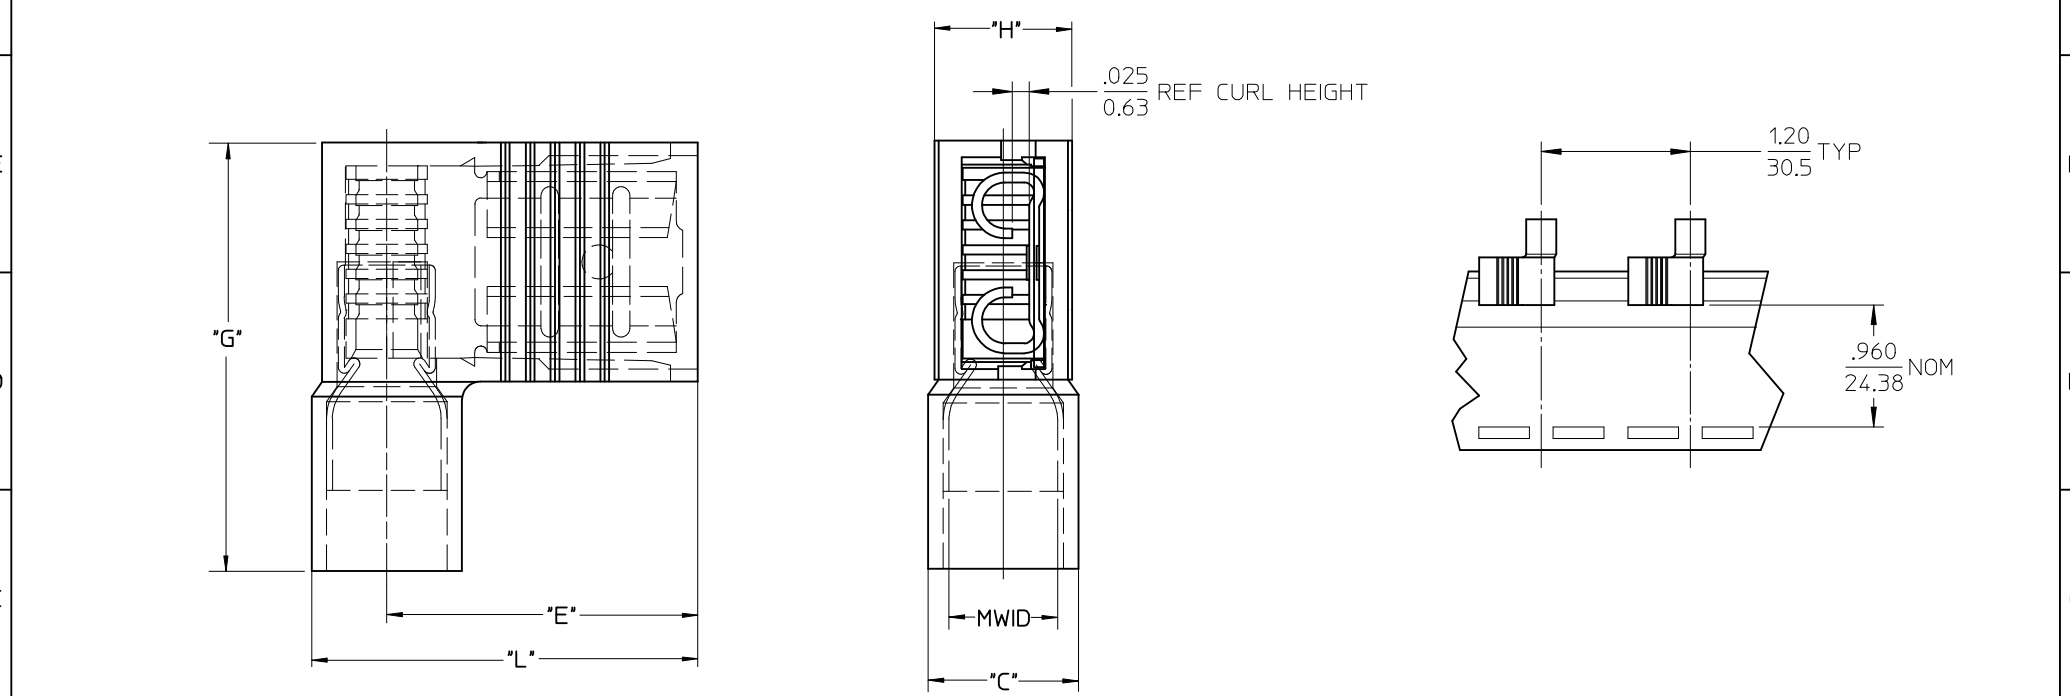


SALES DRAWING

- NOTES:
1. MATERIAL: BRASS.
PLATING: ELECTROPLATE TIN.
 2. INSULATION: NYLON.
 3. MWID=MAXIMUM WIRE INSULATION DIA.
 4. ALL DIMENSIONS IN INCHES (MM).

EC NO: ETC2004-0126 DRWN: DMYRICK 2004/01/06 CHKD: SBEITZEL 2004/01/06 APPR: RDEROSS 2004/01/07	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY			
			mm	INCH	DIMENSION STYLE IN/MM		TITLE AVIKRIMP FLAG FULLY INSULATED .250 TAB WIDTH  MOLEX INCORPORATED				
			4 PLACES ± --- ± ---		DRAWN BY DMYRICK	DATE 03/12/26					
			3 PLACES ± --- ± .005		CHECKED BY SBEITZEL	DATE 03/12/26					
			2 PLACES ± 0.13 ± .01		APPROVED BY RDEROSS	DATE 03/12/26				MATERIAL NO. (SEE CHART)	DOCUMENT NO. SD-19006-001
	REV	B	 0	1 PLACE ± 0.25 ± ---					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
				ANGULAR ±1/2°							
				DRAFT WHERE APPLICABLE							
				MUST REMAIN WITHIN DIMENSIONS							

10		9		8		7		6			5		4		3	2	19006
MATERIAL NO.	ENG. NO.	MATERIAL NO. TAPE MOUNTED	ENG. NO. TAPE MOUNTED	MATERIAL NO. STRIP MOUNTED	ENG. NO. STRIP MOUNTED	AWG	COLOR	MWID	"L" ±.015/381	"E" ±.015/381	"C" DIA ±.015/381	"G" ±.015/381	"H" ±.015/381				
190060001	AA-5220	190060003	AA-5220T	190060004	AA-5220Z	22-18	RED	.150/3.81	.620/15.75	.512/13.00	.222/5.64	.690/17.53	.196/4.98				
190060011	BB-5221	190060013	BB-5221T	190060014	BB-5221Z	16-14	BLUE	.170/4.32		.500/12.70	.242/6.15	.690/17.53	.196/4.98				
190060019	C-5211	190060020	C-5211T	190060070	C-5211Z	12-10	YELLOW	.245/6.22	.667/16.94	.511/12.98	.311/7.90	.677/17.20	.246/6.25				

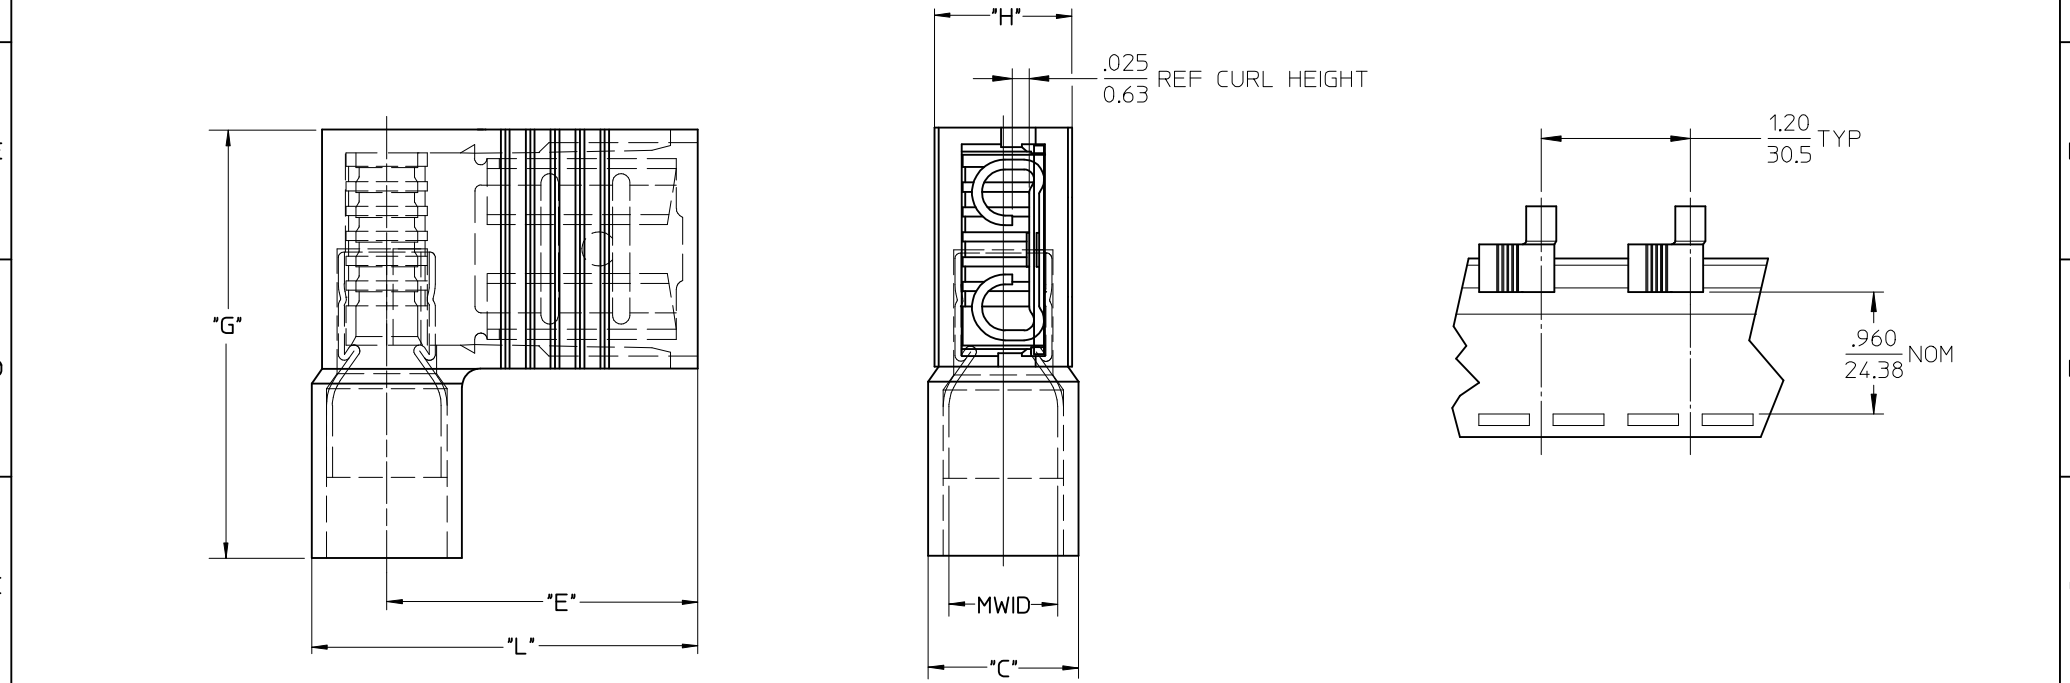

SALES DRAWING

- NOTES:
1. MATERIAL: BRASS.
PLATING: ELECTROPLATE TIN.
 2. INSULATION: NYLON.
 3. MWID=MAXIMUM WIRE INSULATION DIA.
 4. ALL DIMENSIONS IN INCHES (MM).

EC NO: ETC2004-0126 DRWN: DMYRICK 2004/01/06 CHKD: SBEITZEL 2004/01/06 APPR: RDEROSS 2004/01/07	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
		 0  0	mm INCH	DIMENSION STYLE		TITLE AVIKRIMP FLAG FULLY INSULATED .250 TAB WIDTH				
			IN/MM							
			4 PLACES ± --- ± ---	DRAWN BY DMYRICK		DATE 03/12/26				
			3 PLACES ± --- ± .005	CHECKED BY SBEITZEL		DATE 03/12/26				
2 PLACES ± 0.13 ± .01	APPROVED BY RDEROSS		DATE 03/12/26		MATERIAL NO. (SEE CHART)		DOCUMENT NO. SD-19006-001	SHEET NO. 1 OF 1		
1 PLACE ± 0.25 ± ---	ANGULAR ± 1/2°		MOLEX MOLEX INCORPORATED							
DRAFT WHERE APPLICABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
MUST REMAIN WITHIN DIMENSIONS										
B	REV									