

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


P

REDRAWN PER 0720-0244-93


24APR96

LO

ME

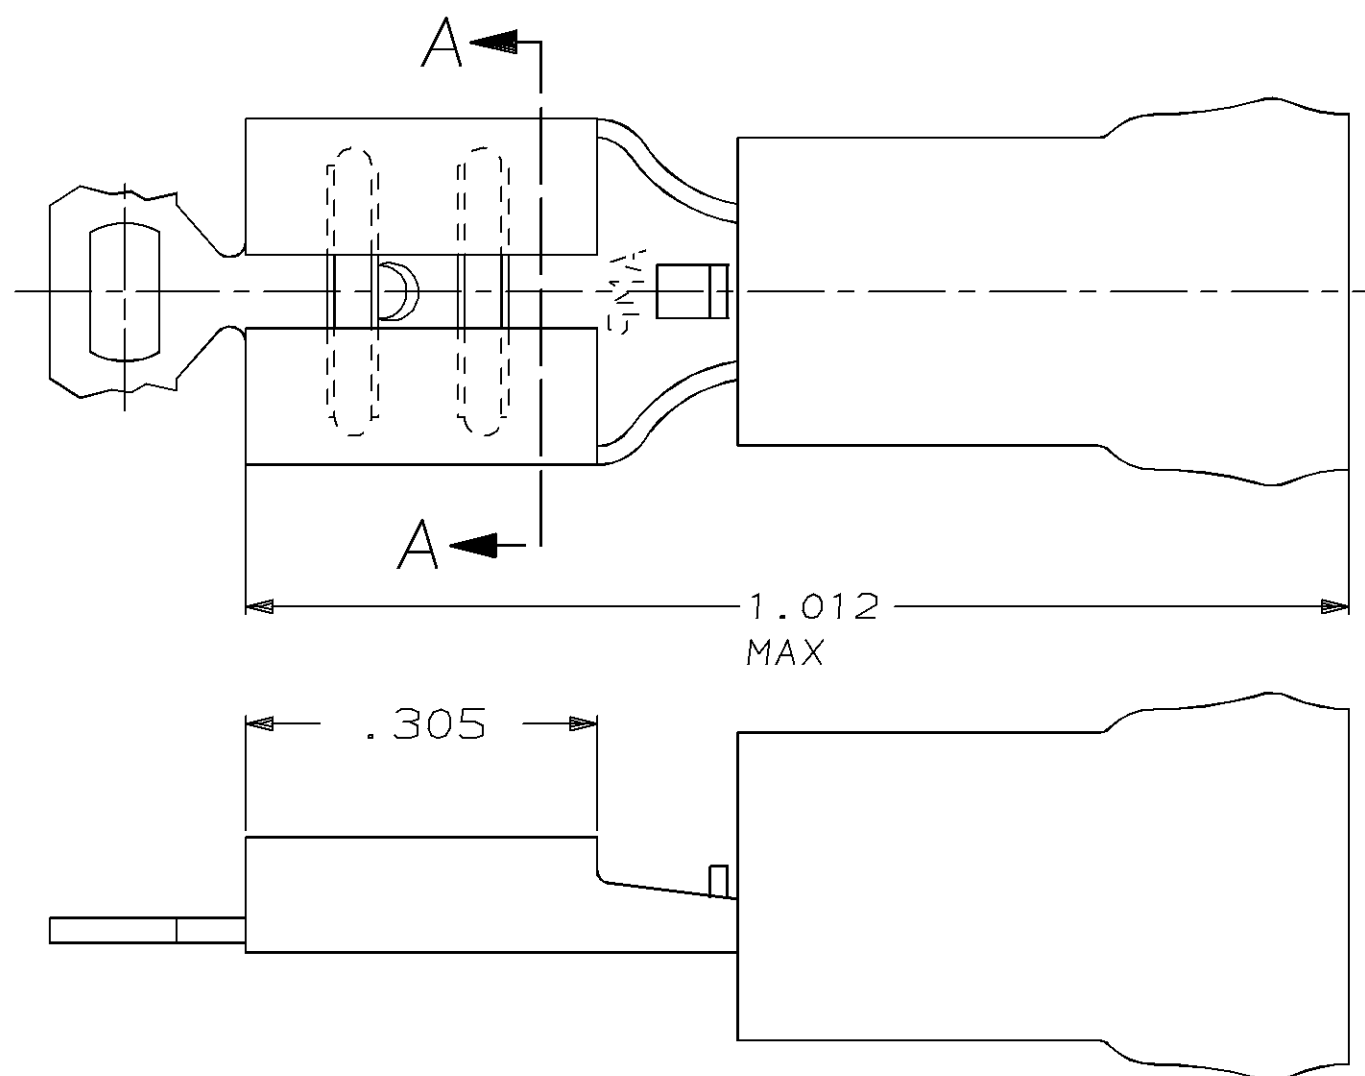

1. MAX WIRE LIMITED TO 6,470 CMA
2. FOR .250 MAX INSULATION DIA
3. FITS TAB .032±.001

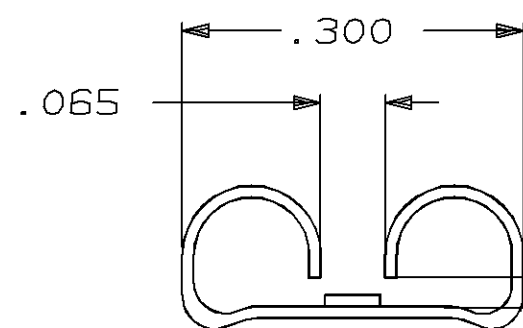

FITS "250" SERIES FASTON TAB
(REFER TO CP-14251 FOR DETAILS)

SECT A-A

—	—	MINI	60544-3
QTY	PACKAGE TYPE	APPLICATOR TYPE	PART NO

DWN L OLMEDA	AMP Incorporated		
CHK M ELLIS	Harrisburg, PA 17105-3608		
APVD B BARE	NAME RECEPTACLE, 250 SERIES,		
PRODUCT SPEC	FASTON™, PIDG™,		
—	WIRE SIZE, 14-12 AWG		
APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
—	A3	00779	C-60544
WEIGHT	—	SCALE	SHEET
CUSTOMER DRAWING	6:1	1 OF 1	REV P

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:


VOLTAGE RATING:

CIRCULAR MIL AREA:

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm [in]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.38 [.015]
3 PLC	±-
4 PLC	±-
ANGLES	±-

MATERIAL
BODY, BRASS .018

SLV, NYLON, COLOR, GREEN

FINISH
BODY, TIN

—