


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG	COLOR	MAX. INSUL.	DIMENSIONS in.		
					A ^{±.03}	B ^{±.02}	C ^{±.02}
DV10-250C	.250 X .032 (6.4 X 0.81)	12-10	YELLOW	.229 (5.82)	1.04 (26.42)	.30 (7.62)	.12 (3.05)

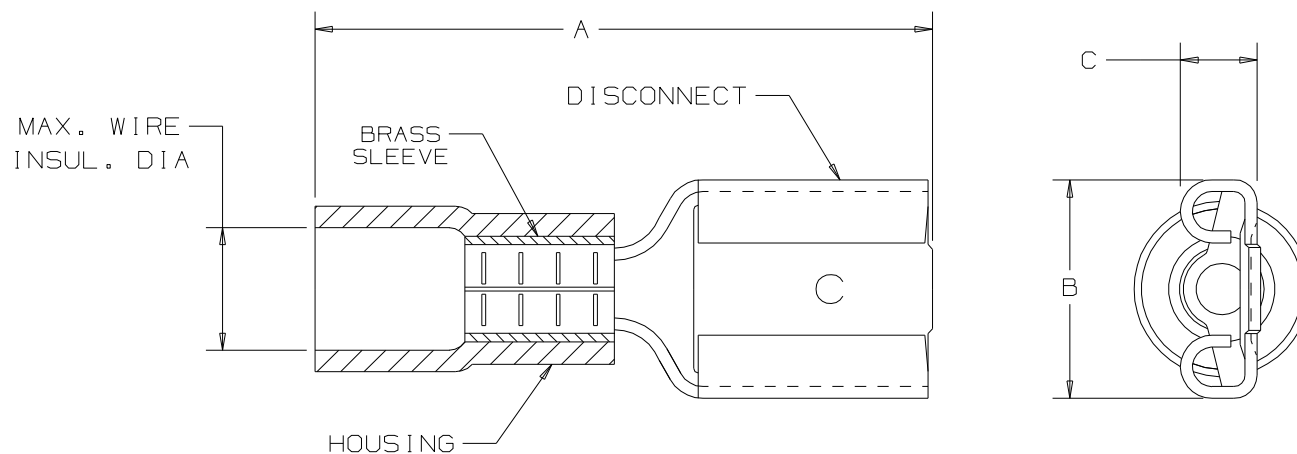

NOTES:

1. 600 V MAX VOLTAGE RATING.
194° F (90°C) MAX TEMPERATURE RATING.
STRANDED COPPER WIRE ONLY.
2. MATERIAL:
A. STAMPING: CDA-260 BRASS, TIN PLATED
B. HOUSING: VINYL
3. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
4. WIRE STRIP LENGTH $9/32 \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix} (7.1 \begin{smallmatrix} +.8 \\ -.0 \end{smallmatrix})$
5. PACKAGE QUANTITY: -L = 50
 -D = 500
6. INSTALLATION TOOLS: CT-100, CT-160,
CT-260, CT-460, CT-550, CT-1550, CT-1551

A41730_00

								 PANDUIT CORP. TINLEY PARK, ILLINOIS			
								FEMALE DISCONNECT FOR COMPRESSOR TABS, VINYL INSULATED, .250 x .032			
00	12/05	DAW		RELEASED	TR00060						
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY DAW	CHK'D	SCALE NONE	DRAWING NO./CAD FILENAME A41730