


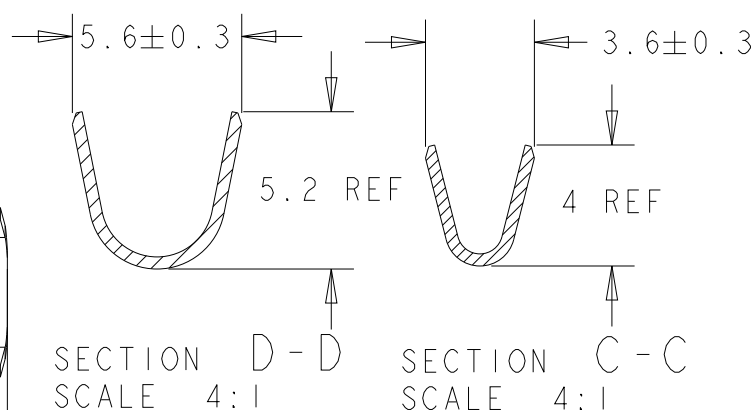
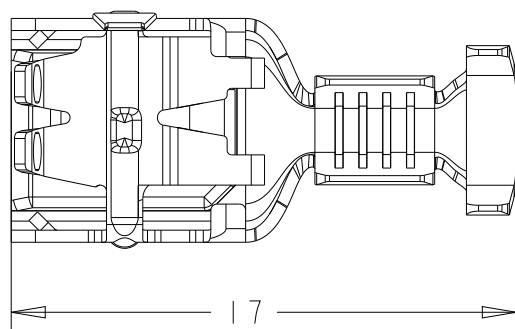
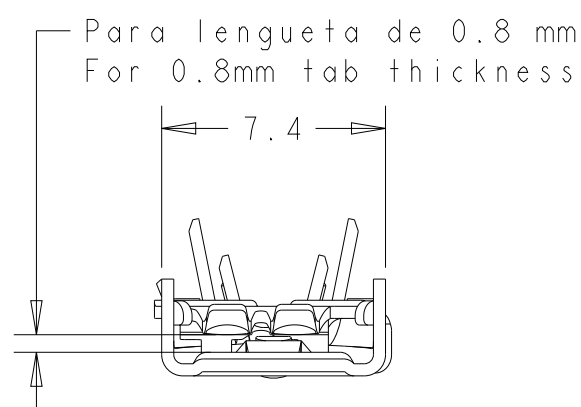


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	HI	REVISED PER ECR-19-018140	24DEC2020	SS	EW

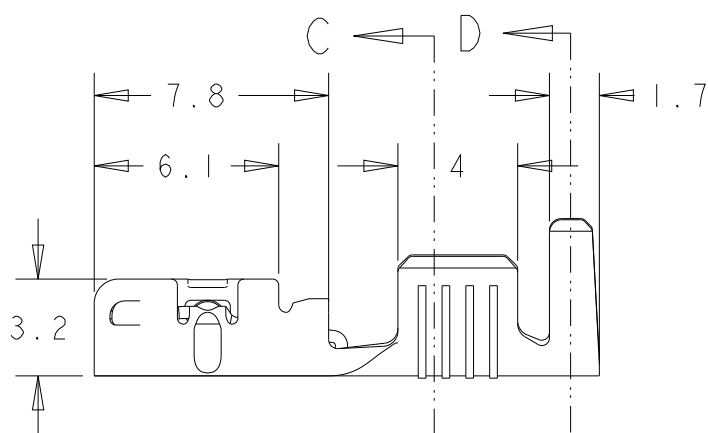

Left-sided product




Right-sided product

Rango de hilo de >1,0 a 2,5 mm²
 Wire range from >1.0 to 2.5 mm²
 Diametro de aislante max 4,3 mm
 Max. Insulation Diameter 4.3 mm

© 2021 TE Connectivity. All Rights Reserved.

1644008-5	Latón Brass	Preestañado Pre-TiN
Guion Dash	Material	Acabado Finish

DIMENSIONS:		DWN	22 Dec 04	MATERIAL		FINISH	
mm		J. Sal	22 Dec 04	Table		Table	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	22 Dec 04	TE Connectivity			
		L. Lázaro					
		APVD	-				
		-					
0 PLC ±0.5		PRODUCT SPEC		NAME E-SPRING CONTACT 6,35 Receptaculo 6,35 Receptáculo E-SPRING CONTACT			
1 PLC ±0.5		108-22128 Brass					
2 PLC ±-		108-22150 Pre-Ni Steel					
3 PLC ±-							
4 PLC ±-		APPLICATION SPEC					
ANGLES ±-		114-22017		SIZE		RESTRICTED TO	
		WEIGHT		A4		-	
		-		CAGE CODE		DRAWING NO	
CUSTOMER DRAWING				A400779		C-1644008	
				SCALE		SHEET	
				4:1		OF	
						REV	
						H	