
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER ECR-13-004343	30JUL13	KH	KR

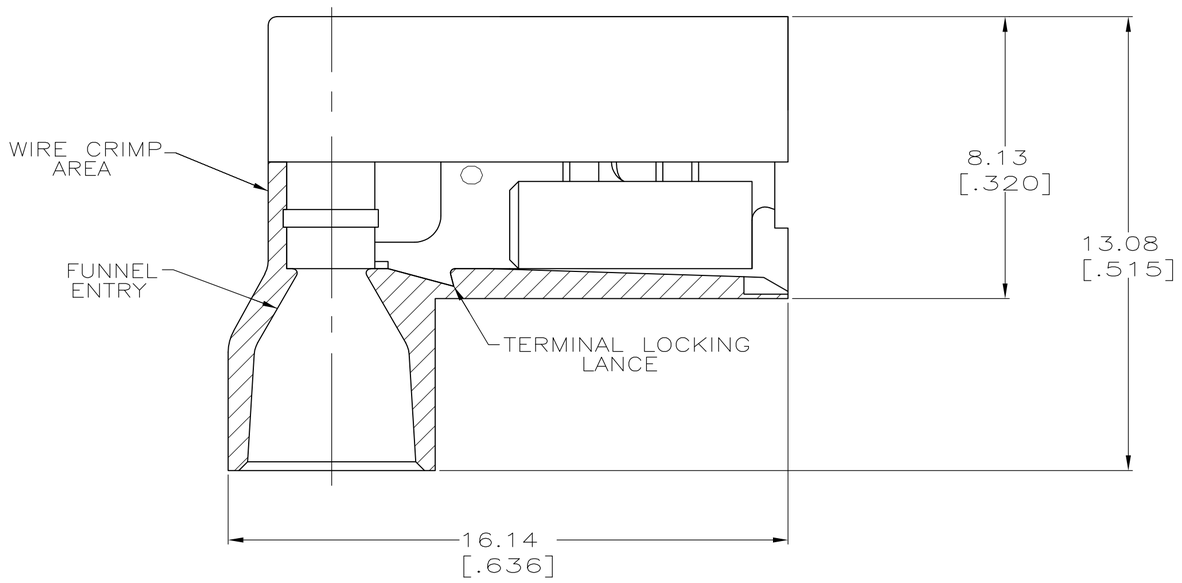



1 FITS 0.51±0.025 X 4.75 [.020±.001 X .187] TAB

2 WIRE SIZE: 0.3–0.9mm² [22–18 AWG], STRANDED ONLY.
STRIP LENGTH 7.14 [.281]

3 INSULATION SIZE: 4.19 [.165] MAX DIA.

4 SUPPLIED AS LOOSE PIECE

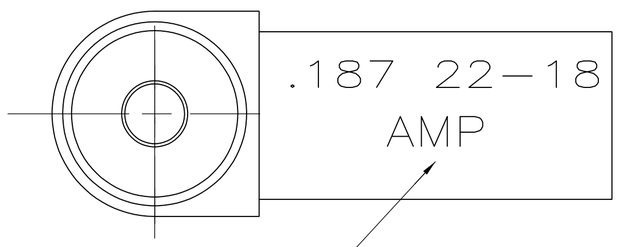

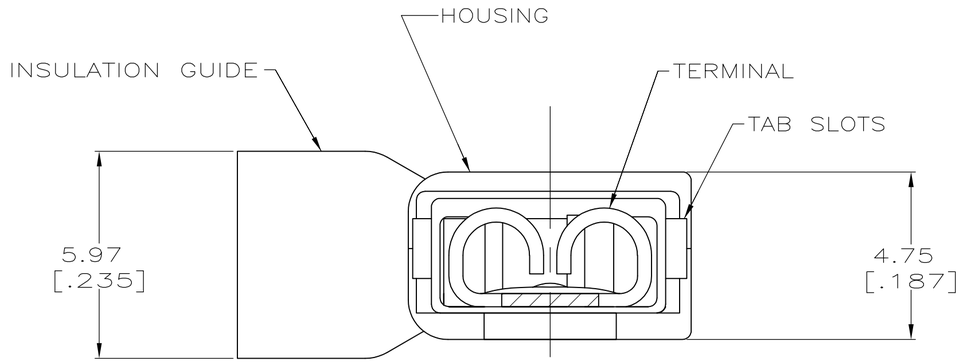

OBSOLETE	TYPE 6/6 NYLON	RED TRANSLUCENT	0.41 [.016] #4H PH BRZ	TIN	2-520335-4
	TYPE 6/6 NYLON	RED TRANSLUCENT	BRASS	TIN	2-520335-2
	MATERIAL	COLOR	MATERIAL	FINISH	PART NO
	HOUSING		TERMINAL		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.38 [.015]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN P FORTNEY 8/10/90
CHK MS FEHER 8/23/90
APVD D BRATINA 8/23/90
PRODUCT SPEC 108-2043
APPLICATION SPEC 114-2123
WEIGHT -

TE Connectivity

NAME: RECEPTACLE ASSEMBLY,ULTRA-FAST FLAG, 4.75 [.187] SERIES,LOOSE PIECE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-520335	-

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV K

520335