

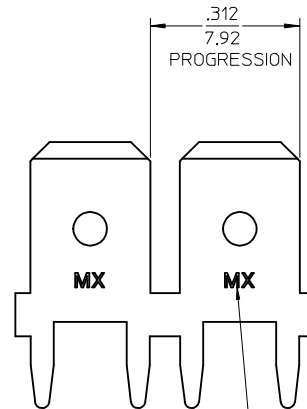




MATERIAL NUMBER	ENGINEERING NUMBER	CARRIER	LOGO ORIENTATION
197054303	19705-4303	STRIP	IN
197054305	19705-4305	STRIP	OUT
197054301	19705-4301	LOOSE	-

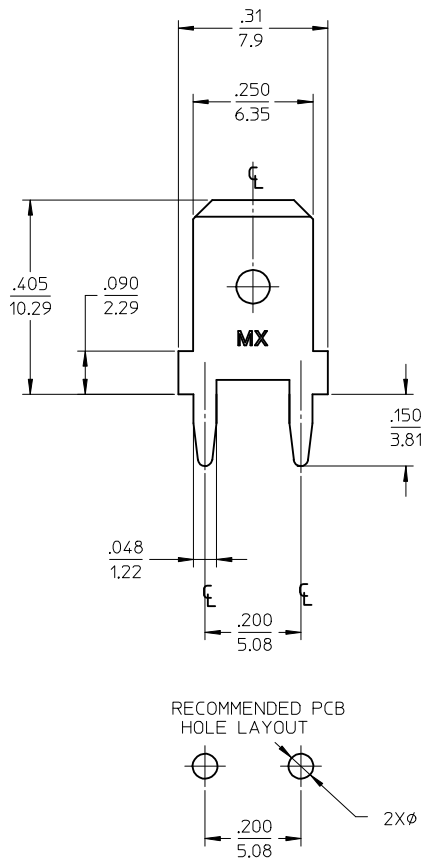

LOGO OPTIONS:
MX, ETC, OR MX-ETC



SCALE 3:1

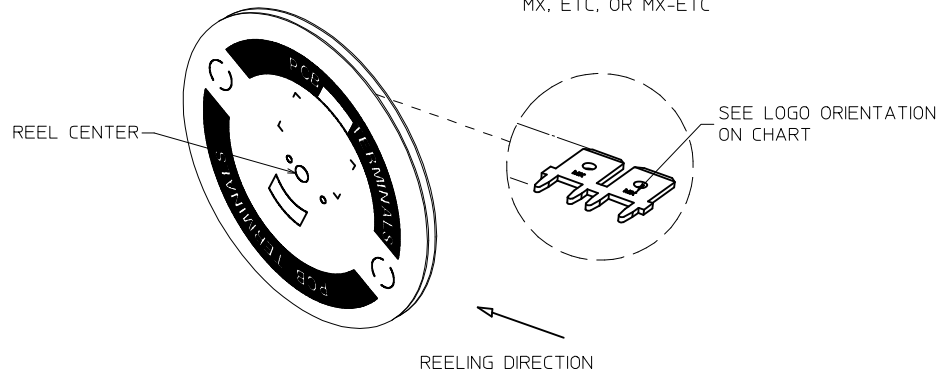

- NOTES:
1. BARE EDGES PERMISSIBLE AT CARRIER CUT OFF.
 2. MATERIAL: BRASS C26000 (.032/0.81) THICK.
 3. TAB CONFORMS TO NEMA SPECIFICATIONS.
 4. ALL DIMENSIONS AND NOTES REFERENCE UNLESS OTHERWISE NOTED.
 5. PLATING: MATTE TIN 150μN/3.81μmm MINIMUM THICKNESS OVER NICKEL 50μN/1.25μmm MINIMUM THICKNESS.
 6. REF: 9,000 MINIMUM PARTS PER REEL, REEL HAS 14" DIAMETER REEL WITH A 1.25"DIAMETER CENTER HOLE.
 7. PART IS ROHS COMPLIANT.

REVISED PCB HOLE DIA EC NO.: ET2007-0403 DRW:HEH 2007/05/14 CHKD: JMACNEIL 2007/05/14 APPR: JMACNEIL 2007/05/15	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 	
				mm	INCH	DRAWN BY EDB	DATE 11/08/96	TITLE QUICK DISCONNECT PCB MOUNTABLE .250 X .032 TAB	 MOLEX INCORPORATED	SHEET NO. 1 OF 1
			4 PLACES	± ---	± ---	CHECKED BY JH	DATE 11/08/96			
			3 PLACES	± ---	± .005	APPROVED BY RWD	DATE 11/08/96			
			2 PLACES	± 0.13	± .01	MATERIAL NO. SD-19705-430				
			1 PLACE	± 0.25	± ---	SEE CHART		SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			ANGULAR ±1/2°							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							