
MOLEX-ETC PART NO.	INS. COLOR	WIRE RANGE AWG	FITS MALE TAB SIZE	STOCK THICK.	"A" MAX.	"B" MIN.	"C" MAX.	"D" MWID	"E" MAX.	CARRIER CONFIGURATION	INSULATION MATERIAL
M-2212	YELLOW	26-24	.250x.032	.016	.86	.030	.380	.075	.180	SEE NOTE 3	94V-2 6/6 NYLON
M-2210	YELLOW	26-24	.187x.020	.016	.78	.030	.316	.075	.160		
M-2211	YELLOW	26-24	.187x.032	.016	.78	.030	.316	.075	.160		
M-2213	YELLOW	26-24	.110x.020	.012	.78	.034	.230	.095	.150		
AA-2201	RED	22-18	.250x.032	.016	.86	.058	.380	.135	.180		
AA-2213	RED	22-18	.205x.020	.016	.78	.058	.316	.135	.160		
AA-2214	RED	22-18	.205x.032	.016	.78	.058	.316	.135	.160		
AA-2202	RED	22-18	.187x.020	.016	.78	.058	.316	.135	.160		
AA-2203	RED	22-18	.187x.032	.016	.78	.058	.316	.135	.160		
AA-2204	RED	22-18	.110x.020	.012	.78	.058	.230	.135	.150		
AA-2205	RED	22-18	.110x.032	.012	.78	.058	.230	.135	.150		
BB-2206	BLUE	16-14	.250x.032	.016	.86	.083	.380	.160	.180		
BB-2215	BLUE	16-14	.205x.020	.016	.78	.083	.316	.160	.170		
BB-2216	BLUE	16-14	.205x.032	.016	.78	.083	.316	.160	.170		
BB-2207	BLUE	16-14	.187x.020	.016	.78	.083	.316	.160	.170		
BB-2208	BLUE	16-14	.187x.032	.016	.78	.083	.316	.160	.170		
19606-0001	YELLOW	12-10	.250X.032	.018	1.04	.120	.380	.240	.220	PLASTIC STRIP	
19606-0002	YELLOW	12-10	.250x.032	.018	1.04	.120	.380	.240	.220	LOOSE PIECE	
19606-0003	YELLOW	12-10	.250x.032	.018	1.04	.120	.380	.240	.220	TAPE MOUNT	
AA-2201VN	NATURAL	22-18	.250X.032	.016	.86	.058	.380	.135	.180	SEE NOTE 3	94V-0 6/6 NYLON
BB-2206VB	BLACK	16-14	.250x.032	.016	.86	.083	.380	.160	.180		
C-2265VN	NATURAL	12-10	.250x.032	.018	1.04	.145	.380	.275	.290		

Ⓑ

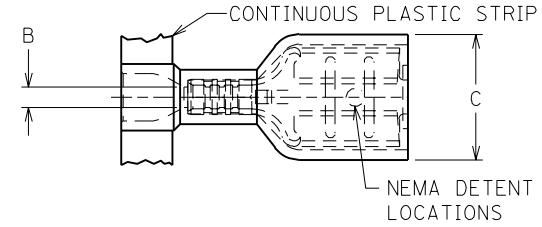

1. MATERIAL: TERMINAL: BRASS
   PLATING: ELECTRO-TIN
   FERRULE: BRASS
   PLATING: ELECTRO-TIN
   INSULATION: NYLON 6/6 SEE CHART Ⓑ
   COLOR: SEE CHART
2. MWID = MAXIMUM WIRE INSULATION DIAMETER
3. FOR CONTINUOUS PLASTIC STRIP ADD "C" TO PART NUMBER. FOR TAPE MOUNT ADD "T".

LTR.	REVISIONS
B	ADD NEW PART NUMBERS ET90049 2/5 HEB
A	ADD NEW PART NUMBERS ET80431 8/28 HEB

CUSTOMER DRAWING

REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .005	± ---
2 PLACE	± .01	± 0.13
1 PLACE	± ---	± 0.25

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

TITLE: INSULKRIMP FEMALE F.I.Q.D. STANDARD FLARE

molex ETC INC. PINELLAS PARK, FLA. 33781 U.S.A.

SHEET NO.

DATE: 06/17/94

PART NO.: SEE CHART

DRWG. NO.: CD-2905

DRWG. BY	CHK'D. BY
RCM	JM
APP'D. BY	SCALE
FP	NO:NE

FILE NAME: CD2905 CST

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX-ETC INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DIV.: ET

SIZE: B